

RAIN WATER RECHARGE PIT DETAIL

Scale- N.T.S.

SITE PLAN

Scale- 1:500

AREA STATEMENT			
Site Area for Residential Development	17 ACRES 31.25 guntas	71957.56	Sq.M.
Kharab Land	0.75 guntas	75.88	Sq.M.
TOTAL SITE AVAILABLE FOR DEVELOPMENT	**17 ACRES 30.50 GUNTAS**	**71,881.68**	**Sq.M.**

CALCULATION OF PARKS/OPEN SPACES

Description	PERMISSIBLE (IN SQM) %	PERMISSIBLE (IN SQM) Area	PROPOSED (IN SQM) Details	PROPOSED (IN SQM) Area	PROPOSED (IN SQM) %
PARKS AND OPEN SPACES	10%	7,188.17	PARKS AND OPEN SPACES AREA-1	6178.73	10.53%
			PARKS AND OPEN SPACES AREA-2	1389.55	
			TOTAL OPEN SPACE PROVIDED	**7,568.28**	
CIVIC AMENITIES	5%	3,594.08	**TOTAL CIVIC AMENITIES PROVIDED**	**3594.59**	5.00%
TOTAL AREA	**15%**	**10,782.25**		**11,162.87**	**15.53%**

NET SITE AREA CONSIDERED FOR FAR (in Sq.M.)	Total Site Area	CA	Site Area-(After deducting CA)
	71,881.68	**3,594.59**	**68,287.09**

CALCULATION OF FAR

	PERMISSIBLE (IN SQM)		PROPOSED (IN SQM)	
F.A.R	**2.50**	**1,70,717.73**	**1.325**	**90,510.41**

CALCULATION OF GROUND COVERAGE

SITE AREA (AFTER DEDUCTING CA)		68,287.09
AREA OF THE ROAD RELINQUISHED (Y)		6,474.87
AREA OF THE ROAD TO BE RELINQUISHED (X)		778.69
TOTAL AREA OF ROAD RELINUISHED (X+Y)		**7,253.56**
NET PLOT AREA FOR GROUND COVERAGE (SITE AREA-X-Y) =		68,287.09 - 6474.87-778.69 = 61,033.53
NET PLOT AREA		**61,033.53**
	PERMISSIBLE (IN SQM)	**PROPOSED (IN SQM)**
GROUND COVERAGE	**55%** **33,568.44**	16,395.30 (PODIUM AREA) / 61,033.53 (SITE AREA) = 26.86% **16,395.30**

SUMMARY OF RESIDENTIAL BLOCKS

Sl No	Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	Built Up Area (Sqm)	Parking (Sqm)	Lifts + LMR (Sqm)	Staircases + Staircase headroom (Sqm)	Services (Sqm)	OTS Terraces (refuge)/ Other canopies at Podium 1 level	Net FAR Deductions (Sqm)	FAR (Sqm)	No Of Regular Units on Level	No Of EWS Units	Total no.of units
1	Ground floor	14,440.44	-	14,440.44	14,246.81		13.93	177.11	-	14,437.85	2.59	-		
2	Podium 1	13,248.84	0.28	13,248.56	12,803.11		13.93		371.85	13,188.89	59.67			
3	Podium 2	12,791.63	0.28	12,791.35	12,775.10		13.93	-	-	12,789.03	2.32	-		
	Total for Parking Level	**40,480.91**	**0.56**	**40,480.35**	**39,825.02**	**-**	**41.79**	**177.11**	**371.85**	**40,415.77**	**64.58**	**-**	**-**	**-**
1	Amenities ground floor	661.03	-	661.03		3.99	19.25		-	23.24	637.80	-		
2	Amenities Podium 1 floor	283.14	-	283.14		3.99	17.76		-	21.75	261.39	-		
3	Amenities Podium 2 floor	341.06	-	341.06		3.99	14.99		-	18.98	322.08	-		
	Total for Amenties	**1,285.23**	**-**	**1,285.23**	**-**	**11.97**	**52.00**	**-**	**-**	**63.97**	**1,221.27**		**-**	**-**

GROUND FLOOR AREA (GROUND COVERAGE) = GROUND FLOOR PARKING AREA (INCL FTP RAMP) + GROUND FLOOR AMENITIES AREA + GROUND FLOOR BUILDING AREA = 14,440.34SQM + 661.03SQM + 1293.83SQM = 16,395.30 SQM

1	WING A	10,943.50	255.91	10,687.59	-	380.00	851.92	155.84	19.70	1,407.46	9,280.13	108	-	108
2	WING B	10,964.81	255.91	10,708.90	-	380.00	851.92	177.14	19.70	1,428.76	9,280.14	108	-	108
3	WING C	10,011.70	235.36	9,776.34	-	380.00	777.82	178.80	18.02	1,354.64	8,421.70	108	-	108
4	WING D	15,683.66	303.88	15,379.78	-	481.07	877.16	239.15	27.33	1,624.71	13,755.07	166	-	166
5	WING E	11,233.07	266.97	10,966.10	-	380.00	851.92	168.38	19.70	1,420.00	9,546.10	112		112
6	WING F	12,963.52	428.73	12,534.79	-	456.94	882.92	33.24	22.47	1,395.57	11,139.22	-	223	223
7	WING G	10,231.08	237.44	9,993.64	-	380.00	777.82	124.88	18.02	1,300.72	8,692.92	112		112
8	WING H	11,192.38	257.99	10,934.39	-	380.00	851.92	128.12	19.70	1,379.74	9,554.65	112		112
9	WING J	11,192.38	257.99	10,934.39	-	380.00	851.92	128.12	19.70	1,379.74	9,554.65	112		112
	Total of Buildings	**1,04,416.10**	**2,500.18**	**1,01,915.92**	**-**	**3,598.01**	**7,575.32**	**1,333.67**	**184.36**	**12,691.36**	**89,224.56**	**938**	**223**	**1,161**
	GRAND TOTAL (including the parking levels	**1,46,182.24**	**2,500.74**	**1,43,681.50**	**39,825.02**	**3,609.98**	**7,669.11**	**1,510.78**	**556.21**	**53,171.10**	**90,510.41**	**938**	**23.77%**	

TOTAL UNIT COUNT

UNIT TYPE	NUMBER
1BHK	236
2BHK	665
3BHK	260
TOTAL	1161

CAR PARKING REQUIREMENTS AND PROVISION

SL NO.	BUILDING TYPE	CAR PARKING REQUIRED UNITS	CAR PARKING REQUIRED CARS	CAR PARKING PROVIDED Number of car parks Provided in :	No. of Cars
1	CAR PARKING REQUIRED @ 0.5 CAR PER DWELLING UNIT NOT EXCEEDING 50SQM	223	112	No. of Car Parks in Ground Floor	400
2	CAR PARKING REQUIRED @ 1 CAR PER DWELLING UNIT EXCEEDING 50SQM	938	938	No. of Car Parks in Podium 1	370
	TOTAL	1,161	1,050	No. of Car Parks on Podium 2	361
3	VISITORS CAR PARKING @ 10%		105	No. of Car Parks on Surface	114
4	**AMENITIES BLOCK CAR PARKING @ 1CAR PER 50SQM OF FAR 1221.27/50**		**25**	**TOTAL NUMBER OF CAR PARKS PROVIDED FOR AMENITIES**	**25**
	TOTAL CAR PARKING REQUIRED		**1,179**	**TOTAL NUMBER OF CAR PARKS PROVIDED**	**1270**

GROUND COVERAGE CALCULATION		
NON TOWER AREA GROUND FLOOR PLINTH AREA (INCL FTP RAMP)	14,440.44	SQM
AMENITIES GROUND FLOOR PLINTH AREA	661.03	SQM
TOWER GROUND FLOOR PLINTH AREA INCL LIFT AND STAIRCASE	1,293.83	SQM
TOTAL	16,395.30	SQM

TREE PLANTATION REQUIREMENT		
FAR CONSUMED	90,499	SQM
	PLANTATION REQUIRED	PLANTATION PROPOSED
TOTAL NUMBER OF TREES REQUIRED @ 1 TREE PER 240SQM OF FAR CONSUMED (1,70,438/240)	378	378

RELINQUISHED AREA DETAILS		
PARKS AND OPEN SPACES	7,568.28	SQM
SITE AREA RELINQUISHED TO ROAD	7,253.56	SQM

CLUBHOUSE AREA STATEMENT

Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	DEDUCTIONS FOR Courtyard (Sqm)	Built Up Area (Sqm)	DEDUCTIONS FOR NON FAR AREAS STAIRCASE	LIFT	SERVICES	TOTAL	FAR area (Sqm)
Pump room	70.95	-		68.59			68.59	68.59	-
Ground floor	1,719.10	1.33	93.59	1,624.18		4		4.00	1,620.18
First floor	562.64	5.69		851.47	15.12	4		19.12	832.35
Total	**2,352.69**	**7.02**	**93.59**	**2,544.24**	**15.12**	**8.00**	**68.59**	**91.71**	**2,452.53**

SUMMARY OF RESIDENTIAL BLOCKS

Sl No	Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	Built Up Area (Sqm)	Head Room & LMR &OHT	Parking (Sqm)	Lifts + LMR (Sqm)	Staircases + Staircase headroom (Sqm)	Services (Sqm)	Others (canopies, roof slabs)	OTS Terraces (refuge)/ Other canopies at Podium 1 level	Net FAR Deductions (Sqm)	FAR (Sqm)
1	Ground floor	14,440.44	-	14,440.44	-	14,246.81		13.93	177.11		-	14,437.85	2.59
2	Podium 1	13,248.84	0.28	13,248.56	-	12,803.11		13.93			371.85	13,188.89	59.67
3	Podium 2	12,791.63	0.28	12,791.35	-	12,775.10		13.93	-		-	12,789.03	2.32
	Total for Parking Level	**40,480.91**	**0.56**	**40,480.35**	**-**	**39,825.02**	**-**	**41.79**	**177.11**	**-**	**371.85**	**40,415.77**	**64.58**
1	Amenities ground floor	661.03	-	661.03	-		3.99	19.25			-	23.24	637.80
2	Amenities Podium 1 floor	283.14	-	283.14	-		3.99	17.76			-	21.75	261.39
3	Amenities Podium 2 floor	341.06	-	341.06	-		3.99	14.99			-	18.98	322.08
	Total for Amenties	**1,285.23**	**-**	**1,285.23**	**-**	**-**	**11.97**	**52.00**	**-**	**-**	**-**	**63.97**	**1,221.27**

Sl No	Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	Built Up Area (Sqm)	Head Room & LMR & OHT	Parking (Sqm)	Lifts (Sqm)	Staircases (Sqm)	Services (Sqm)		OTS Terraces (Refuge) (Sqm)	Net FAR Deductions (Sqm)	FAR (Sqm)
	PHASE 1												
1	Ground	1,293.83	-	1,293.83	-	-	106.07	242.13	271.60	-	-	619.80	674.03
2	Podium 1	1,623.85	70.09	1,553.76	-	-	106.07	242.13	11.15	-	-	359.35	1,194.41
3	Podium 2	1,623.85	70.09	1,553.76	-	-	106.07	242.13	11.15	-	-	359.35	1,194.41
4	1st Floor	3,672.12	87.08	3,585.04	-	-	106.07	242.13	38.51	-	-	386.71	3,198.33
5	2nd Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
6	3rd Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
7	4th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
8	5th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
9	6th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
10	7th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
11	8th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
12	9th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
13	10th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
14	11th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
15	12th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
16	13th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
17	14th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
18	15th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
19	16th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
20	17th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	184.36	571.07	3,013.63
21	18th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
22	19th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
23	20th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
24	21st Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
25	22nd Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
26	23rd Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
27	24th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
28	25th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
29	26th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
30	27th Floor	3,672.12	87.42	3,584.70	-	-	106.07	242.13	38.51	-	-	386.71	3,197.99
31	Stair head room, LMR, OHT	727.33	-	727.33	-	-	415.91	311.42	-	-	-	727.33	-
	Total	**1,04,416.10**	**2,500.18**	**1,01,915.92**	**-**	**-**	**3,598.01**	**7,575.32**	**1,333.67**		**184.36**	**12,691.36**	**89,224.56**

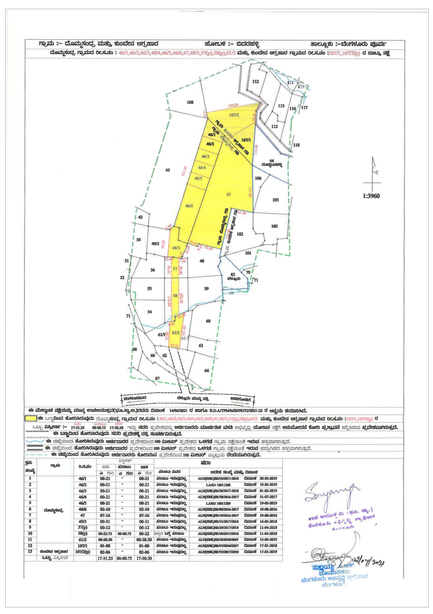

SUMMARY OF EACH BLOCK

BUILDING -01

Sl No	Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	Built Up Area (Sqm)	Lifts (Sqm)	Staircases (Sqm)	Services (Sqm)	OTS Terraces (Refuge) (Sqm)	Net FAR Deductions (Sqm)	FAR (Sqm)	No Of Units on Level
	WING A										
1	Ground	141.71	-	141.71	11.09	27.36	32.18		70.63	71.08	0
2	Podium 1	73.60	6.86	66.74	11.09	27.36	-		38.45	28.29	0
3	Podium 2	73.60	6.86	66.74	11.09	27.36	-		38.45	28.29	0
4	1st Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
5	2nd Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
6	3rd Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
7	4th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
8	5th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
9	6th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
10	7th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
11	8th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
12	9th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
13	10th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
14	11th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
15	12th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
16	13th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
17	14th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
18	15th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
19	16th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
20	17th Floor	391.71	8.97	382.74	11.09	27.36	4.58	19.70	62.73	320.01	4
21	18th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
22	19th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
23	20th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
24	21st Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
25	22nd Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
26	23rd Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
27	24th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
28	25th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
29	26th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
30	27th Floor	391.71	8.97	382.74	11.09	27.36	4.58		43.03	339.71	4
31	Stair head room, LMR, OHT	78.42	-	78.42	47.30	31.12	-		78.42	-	
	Total	**10,943.50**	**255.91**	**10,687.59**	**380.00**	**851.92**	**155.84**	**19.70**	**1,407.46**	**9,280.13**	**108.00**

SUMMARY OF EACH BLOCK

BUILDING -02

Sl No	Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	Built Up Area (Sqm)	Lifts (Sqm)	Staircases (Sqm)	Services (Sqm)	OTS Terraces (Refuge) (Sqm)	Net FAR Deductions (Sqm)	FAR (Sqm)	No Of Units on Level
	WING F										
1	Ground	171.70	-	171.70	13.94	27.67	33.24		74.85	96.85	0
2	Podium 1	282.69	11.19	271.50	13.94	27.67	-		41.61	229.89	4
3	Podium 2	282.69	11.19	271.50	13.94	27.67	-		41.61	229.89	4
4	1st Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
5	2nd Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
6	3rd Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
7	4th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
8	5th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
9	6th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
10	7th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
11	8th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
12	9th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
13	10th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
14	11th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
15	12th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
16	13th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
17	14th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
18	15th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
19	16th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
20	17th Floor	449.44	15.05	434.39	13.94	27.67	-	22.47	64.08	370.31	7
21	18th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
22	19th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
23	20th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
24	21st Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
25	22nd Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
26	23rd Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
27	24th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
28	25th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
29	26th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
30	27th Floor	449.44	15.05	434.39	13.94	27.67	-		41.61	392.78	8
31	Stair head room, LMR, OHT	91.56	-	91.56	38.74	52.82	-		91.56	-	
	Total	**12,963.52**	**428.73**	**12,534.79**	**456.94**	**882.92**	**33.24**	**22.47**	**1,395.57**	**11,139.22**	**223.00**

Sl No	Floors	Gross Area (Sqm)	Deductions for Shafts / Cutouts (Sqm)	Built Up Area (Sqm)	Lifts (Sqm)	Staircases (Sqm)	Services (Sqm)	OTS Terraces (Refuge) (Sqm)	Net FAR Deductions (Sqm)	FAR (Sqm)	No Of Units on Level
	WING G										
1	Ground	100.32	-	100.32	11.09	24.89	-		35.98	64.34	0
2	Podium 1	209.91	7.21	202.70	11.09	24.89	2.23		38.21	164.49	2
3	Podium 2	209.91	7.21	202.70	11.09	24.89	2.23		38.21	164.49	2
4	1st Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
5	2nd Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
6	3rd Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
7	4th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
8	5th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
9	6th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
10	7th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
11	8th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
12	9th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
13	10th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
14	11th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
15	12th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
16	13th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
17	14th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
18	15th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
19	16th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
20	17th Floor	356.76	8.26	348.50	11.09	24.89	4.46	18.02	58.46	290.04	4
21	18th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
22	19th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
23	20th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
24	21st Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
25	22nd Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
26	23rd Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
27	24th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
28	25th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
29	26th Floor	356.76	8.26	348.50	11.09	24.89	4.46		40.44	308.06	4
30	27th Floor	356.