



User Guide

AC1300 Whole Home Mesh Wi-Fi System
Deco M5

Contents

About This Guide	1	Blacklist	19
Appearance	2	Online Upgrade	20
Set Up Your Deco	3	WPS	21
Add More Decos	6	Parental Controls	22
Dashboard	7	Antivirus	23
Check Deco Status	8	QoS	24
Manage Connected Devices	9	Monthly Report	25
Create New Networks	10	Managers	26
Remove/Reboot Deco	12	Advanced Features	27
Shortcut	13	Authentication	32
Automation	14		
Wi-Fi Settings	16		
Internet Speed Test	17		
Network Optimization	18		



About This Guide

This guide provides a brief introduction to Deco Whole Home Mesh Wi-Fi System and the Deco app, as well as regulatory information.

Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Deco experience.

Conventions

In this guide, the following conventions are used:

Convention	Description
Deco	Stands for Deco Whole Home Mesh Wi-Fi System/Unit.
<u>Underline</u>	Hyperlinks are in teal and underlined. You can click to redirect to a website or a specific section.
Teal	Key information appears in teal, including management page text such as menus, items, buttons and so on.
 Note:	Ignoring this type of note might result in a malfunction or damage to the device.
 Tips:	Indicates important information that helps you make better use of your device.

More Info

- Specific product information can be found on the product page at <https://www.tp-link.com>.
- A community is provided for you to discuss our products at <https://community.tp-link.com>.
- Our Technical Support contact information can be found at the [Help](#) center of the Deco app and the [Contact Technical Support](#) page at <https://www.tp-link.com/support/>.

Speed/Coverage/Device Quantity Disclaimer

Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Range, coverage, and maximum quantity of connected devices are based on test results under normal usage conditions. Actual wireless data throughput, wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.

HomeCare Disclaimer

A basic TP-Link HomeCare™, powered by Trend Micro™, package is included for 3 years from date of activation at no additional cost. It includes Parental Controls, Quality of Service, and Antivirus. Deactivation of HomeCare™ will disable certain controls and protections. For a complete list of HomeCare™ functions, go to <https://www.tp-link.com>.

IoT Compatibility Disclaimer

IoT compatibility refers only to smart devices that can be controlled via the Deco app. Other wireless devices can still connect to Deco for normal Wi-Fi use.


Seamless Roaming Disclaimer

Clients need to support 802.11k/v/r and may require additional set up. Performance may vary depending on the client device.

Appearance

Each Deco has an LED that changes color according to its status, two RJ-45 Ethernet ports, a power slot, and a Reset button. See the explanation below:

💡 Tip: The product label can be found at the bottom of the product.

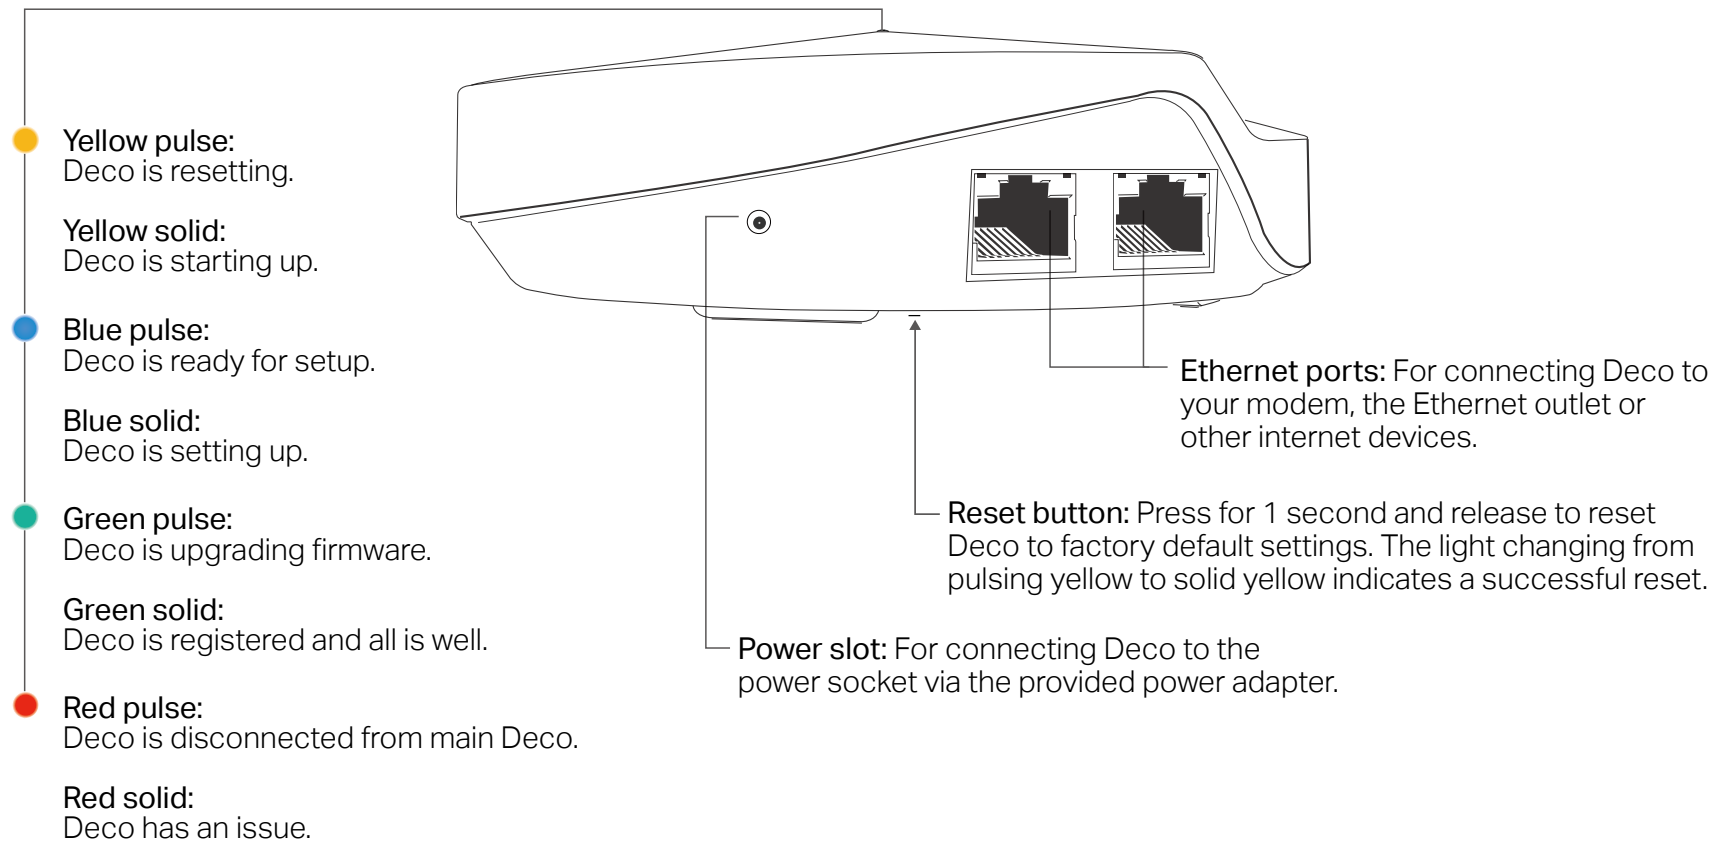

Set Up Your Deco

The intuitive Deco app guides you through an easy setup process that gets each unit up and running and all your devices connected and online. Follow the steps below to set up your Deco Whole Home Mesh Wi-Fi System.

1. Download and install the Deco app

Scan the QR code below or go to Google Play or the Apple App Store to download the Deco app. Install the app on your Android or iOS smartphone or tablet.




or



2. Log in or sign up with TP-Link ID

Open the app. Use your TP-Link ID to log in. If you don't have a TP-Link ID, sign up first.

Note: If you forgot your login password, tap [Forgot password?](#). The Deco app will guide you through the rest.

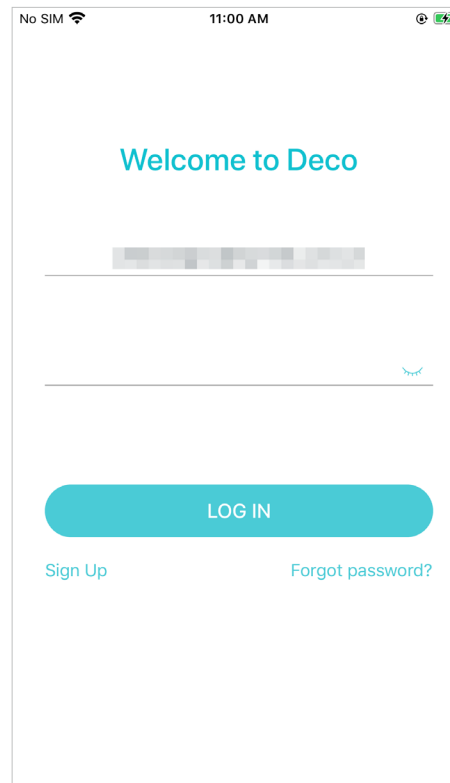

3. Identify your Deco


Choose your Deco model.



4. Connect your modem to Deco


Power off your modem. Connect your Deco to the modem and power them both on.

If you don't have a modem, connect the Ethernet outlet directly to your Deco.

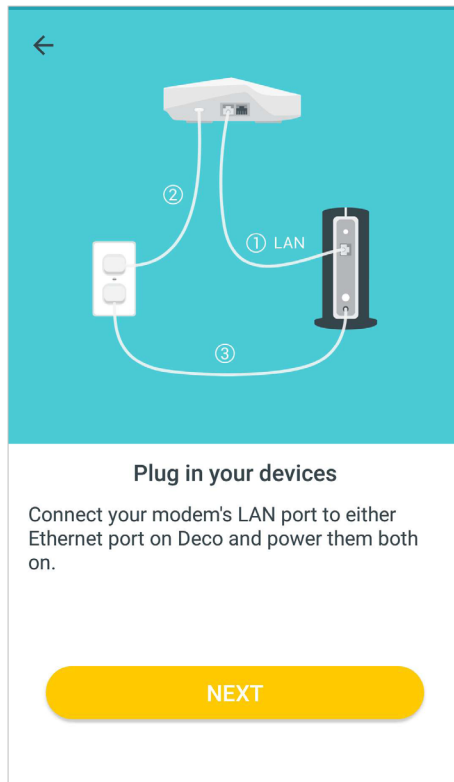


5. Select a location

Select a location for this Deco. If its location is not listed, you can create a new one by choosing [Custom](#).

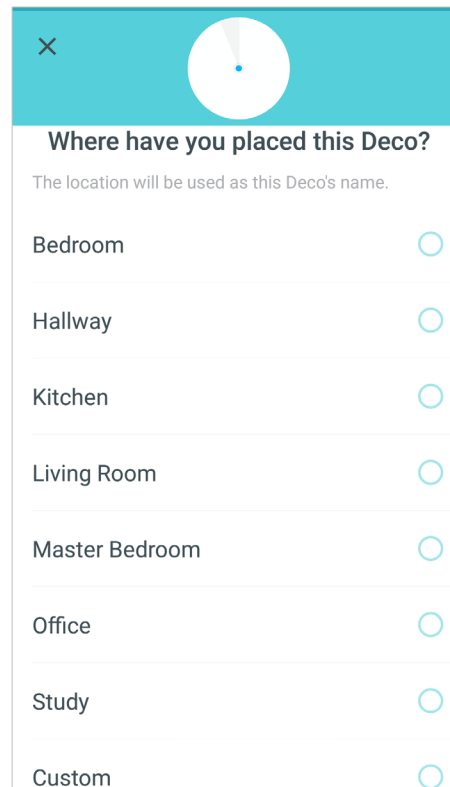


6. Set up internet connection

Select the internet connection type and enter the information. If you are not sure, contact your internet service provider.

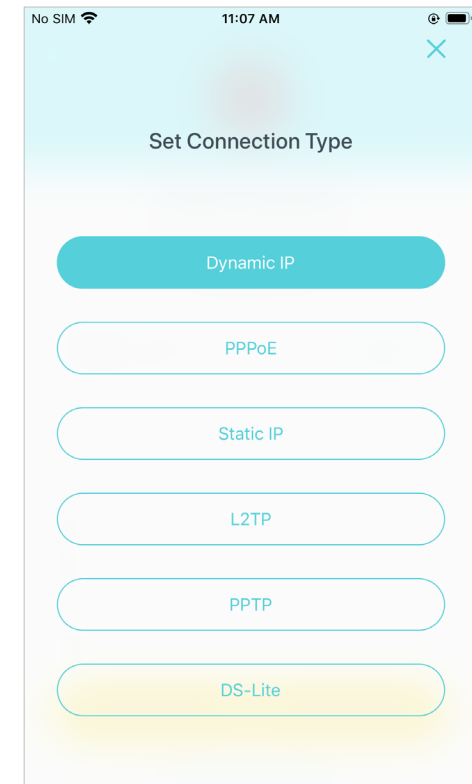

7. Create your Wi-Fi network

Set a network name and a password. These will be the name and password you use to connect your devices to Wi-Fi.

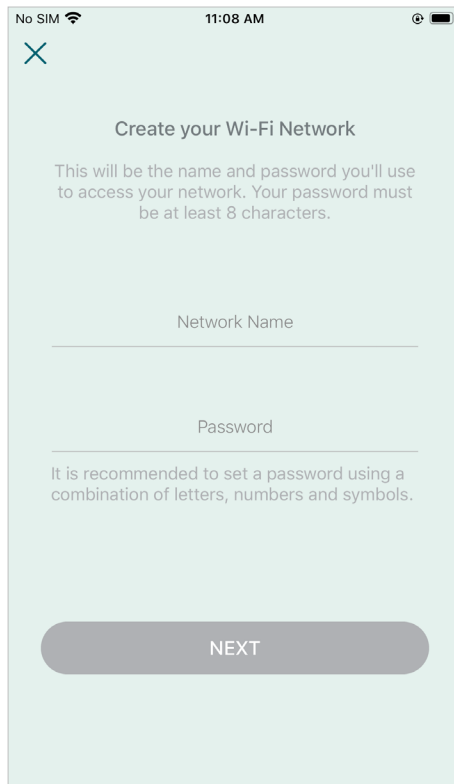

No SIM 11:08 AM

✕

Create your Wi-Fi Network

This will be the name and password you'll use to access your network. Your password must be at least 8 characters.

Network Name


Password

It is recommended to set a password using a combination of letters, numbers and symbols.

NEXT

8. Setup complete

Your Deco network is now up. Add more Decos or complete the setup and connect all devices to the Deco network.

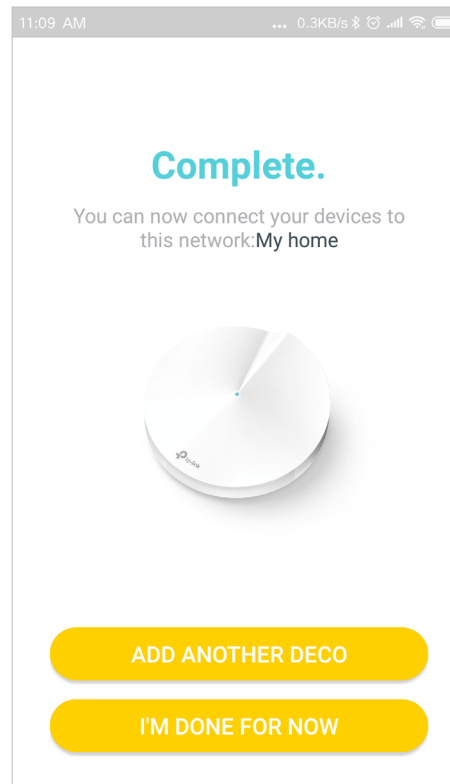


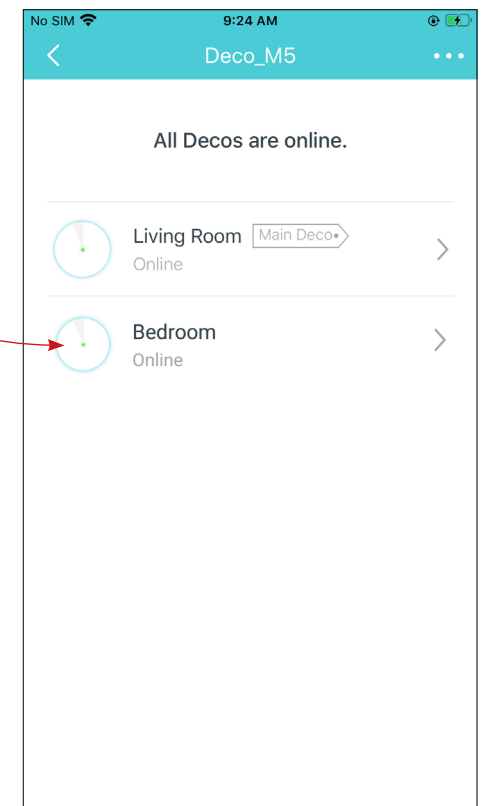
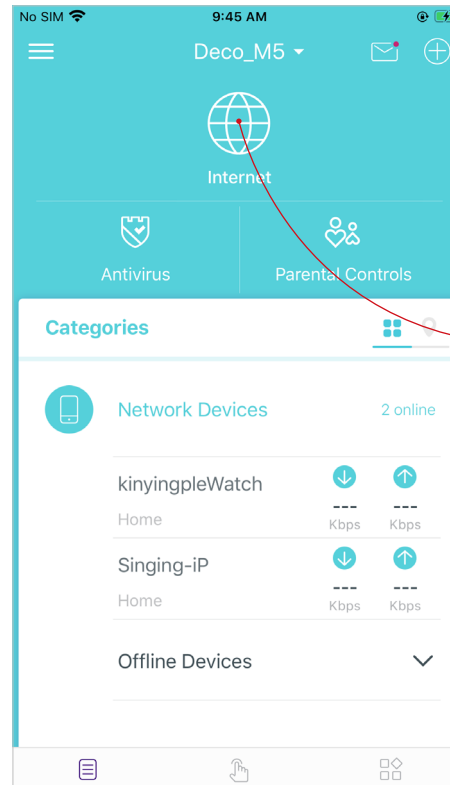
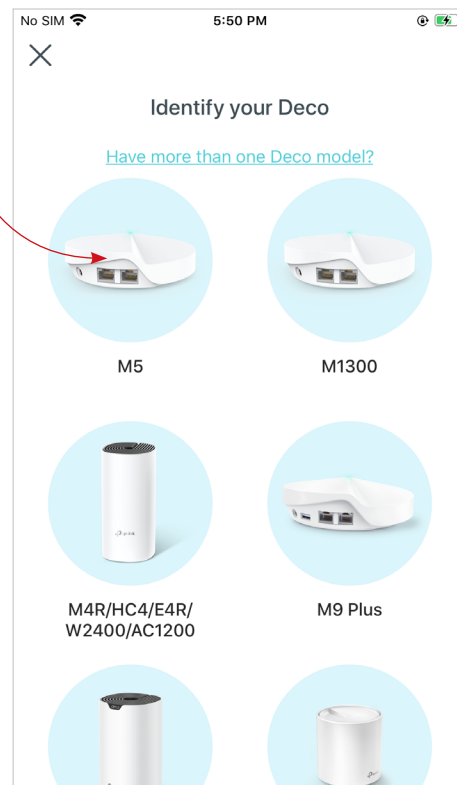
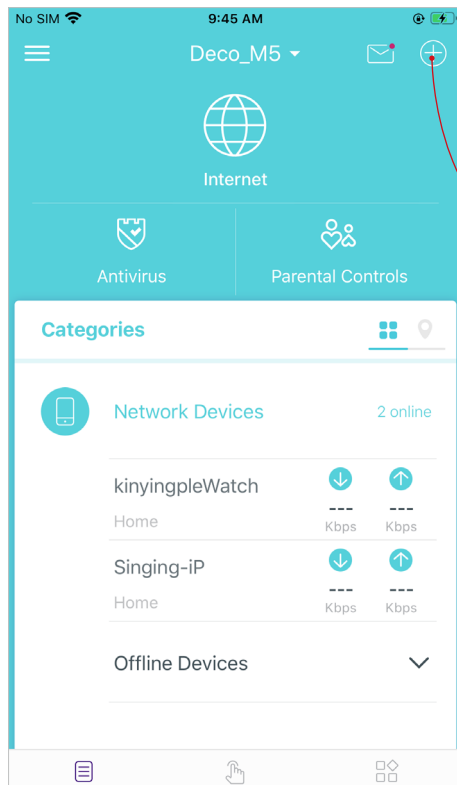
Add More Decos

After created a Deco network, you can add more Deco units into the network to expand the Wi-Fi coverage, and manage them conveniently on your Deco app.

On the Overview page, Tap 


Select the Deco model you want to add, and follow app instructions to complete the setup


After the setup, you can find the added Decos by tapping 




Dashboard


After you successfully set up your Deco network, you will see the dashboard of the Deco app. Here you can get an overview of the network status, create shortcut and automation, and set up various advanced features.


Tap  to get an overview of the network status

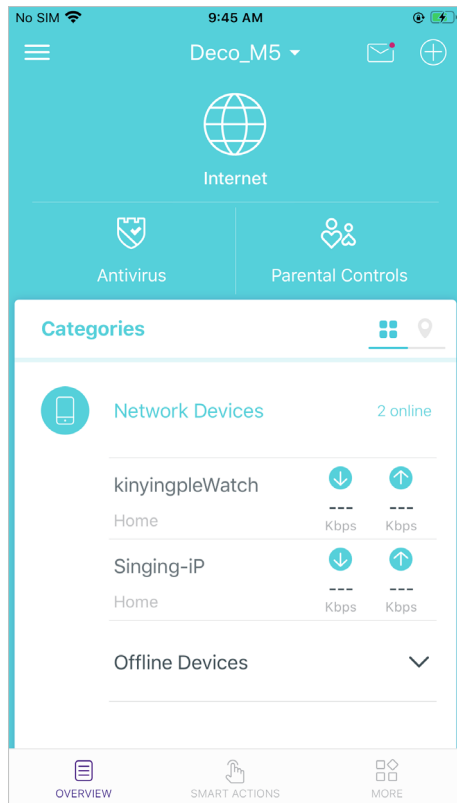


Tap  > [Shortcut](#) to create or execute shortcut

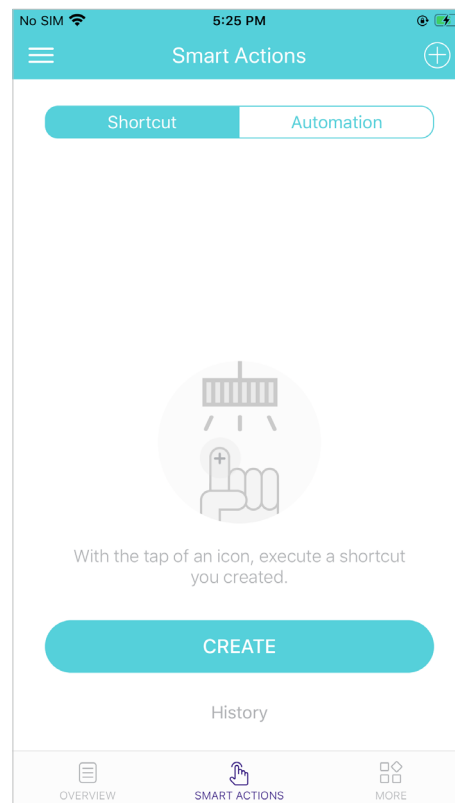

Tap  > [Automation](#) to set interactions between your smart devices

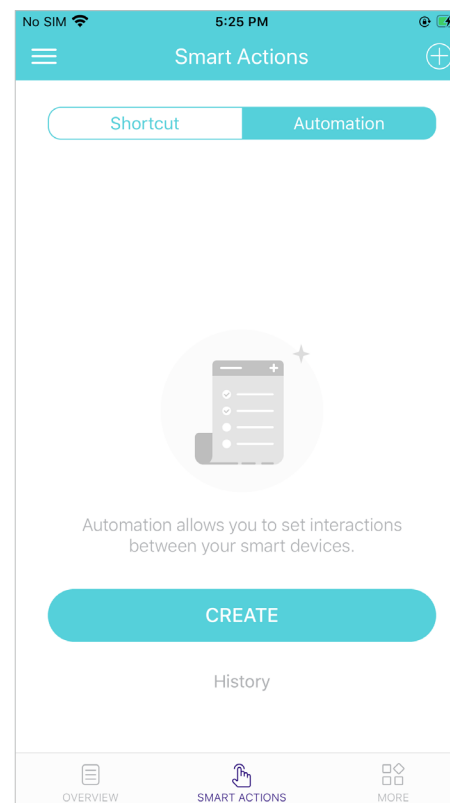


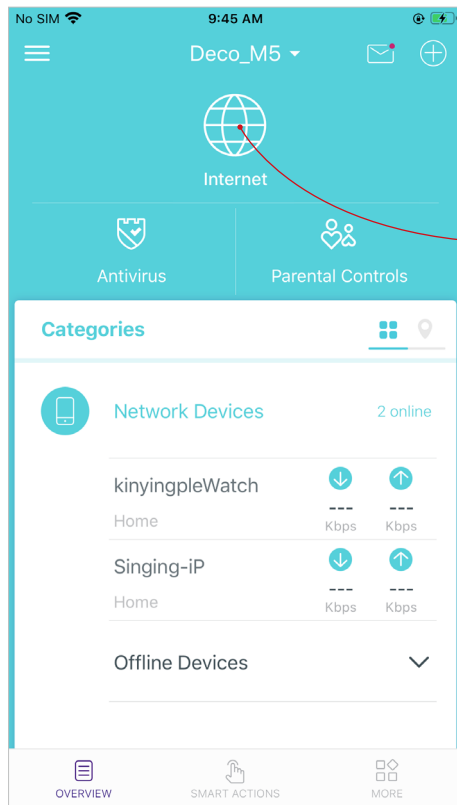
Tap  for more features

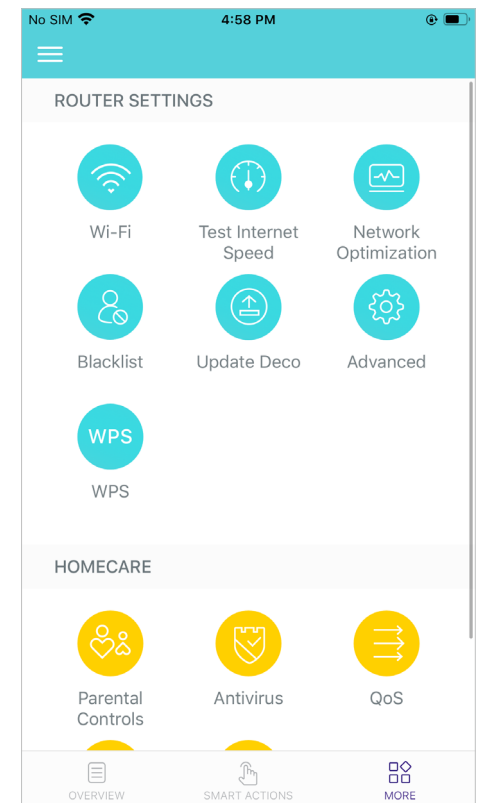


Check Deco Status

In the Overview page, you can check the working status of all the Decos, check the Deco details, change or customize the location, and more.



Tap  to check all Decos' status



Tap a Deco unit to check the details

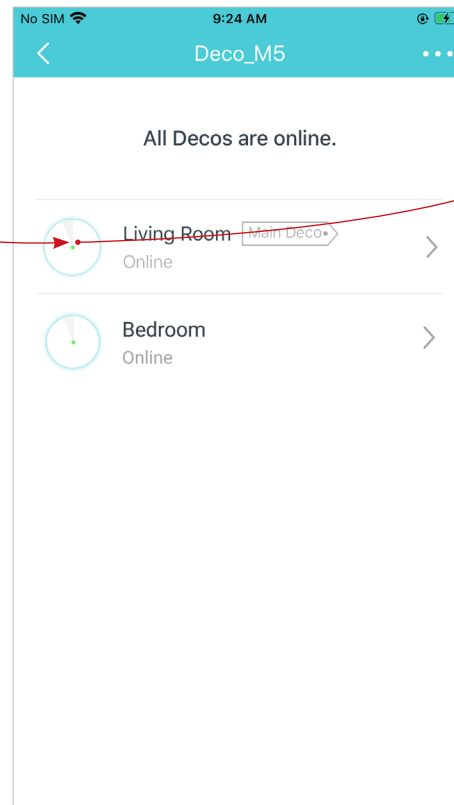


Tap the Deco unit to change or customize the location

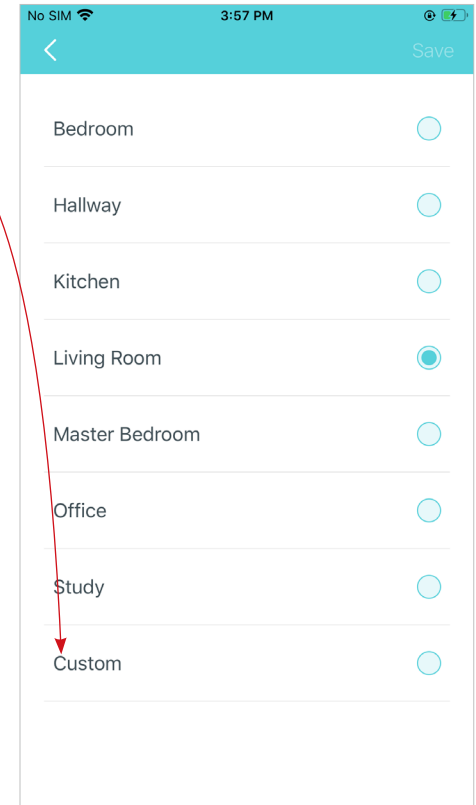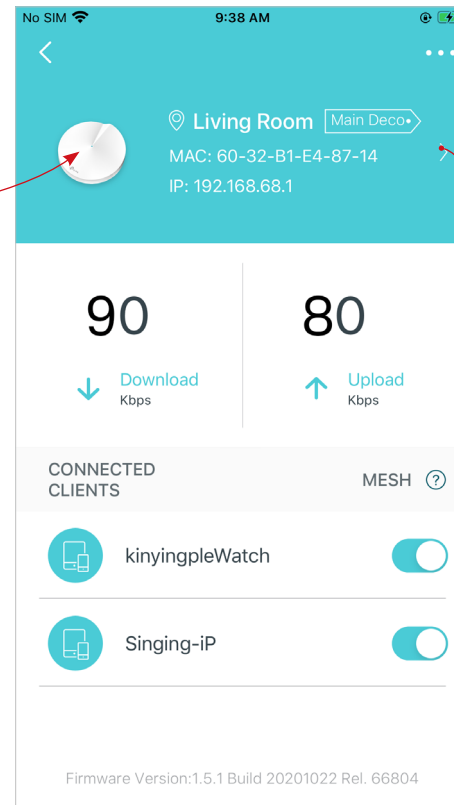


Manage Connected Devices

In the Overview page, you can check the working status of all the connected devices, view the device details, or change the device settings.

Tap a client on the [Network Devices](#) list to check the details

Tap  to manage the device settings

Tap [Belongs to](#) to add a unique profile for the device and manage its online activities

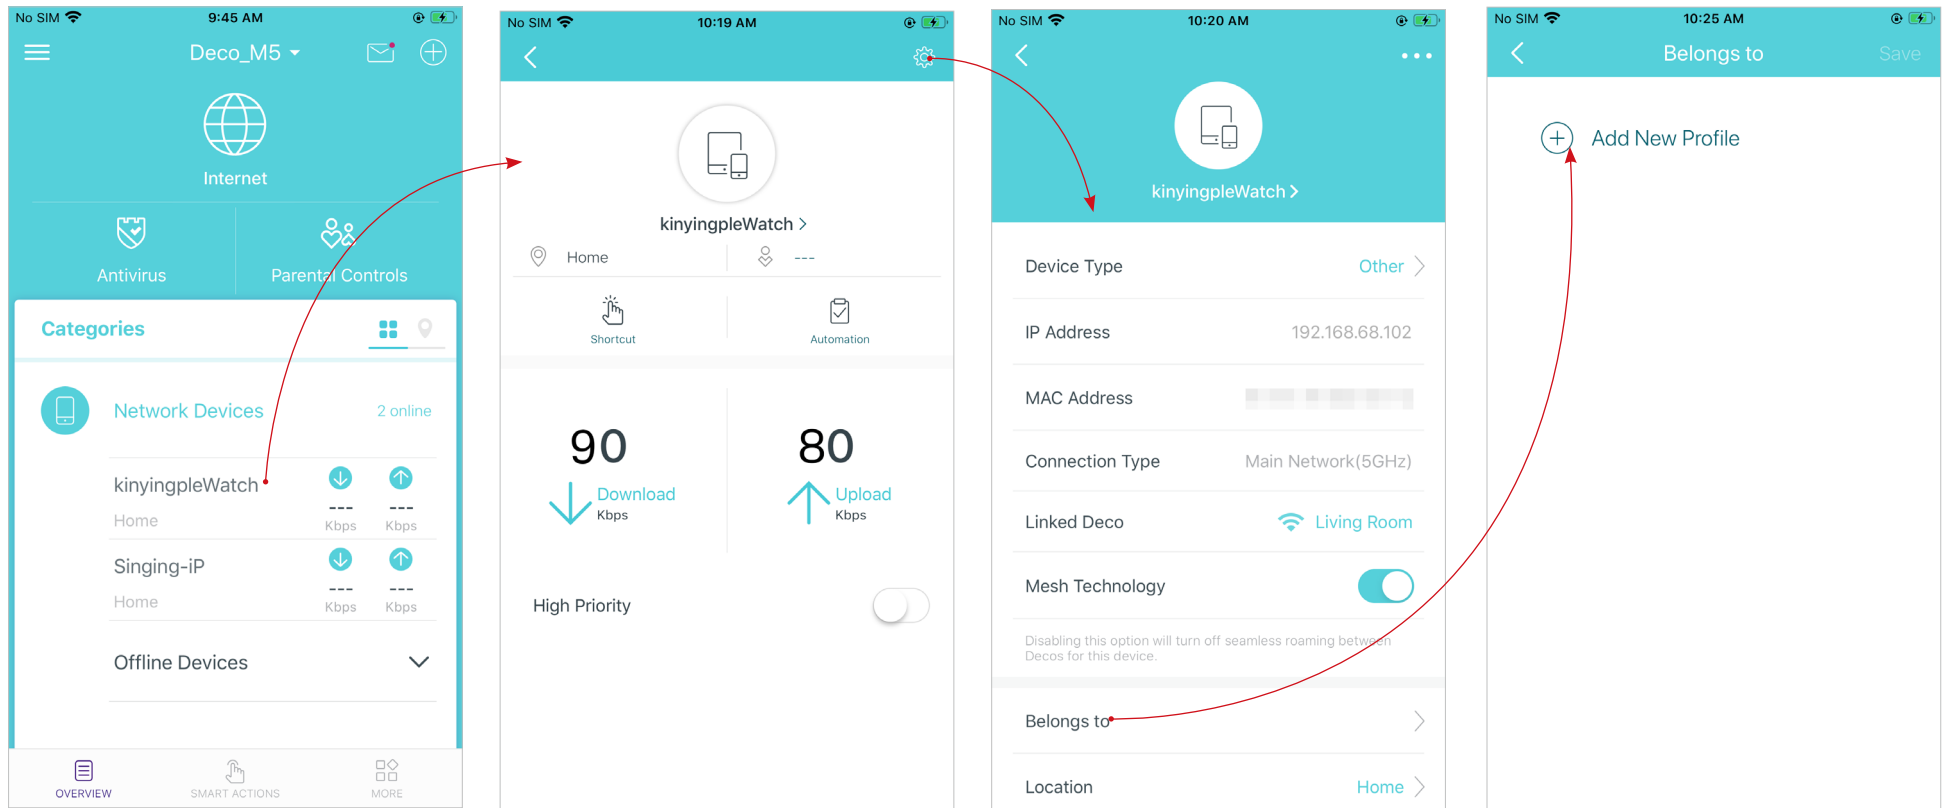



Create New Networks

On the Deco app, you can create different Deco networks bound to your TP-Link ID, and manage them conveniently from the Deco app with one account. You can also help family or friends by managing their network on your Deco app. Two methods are provided as below to create a new network:

Method 1. Create a new network from the Overview page

Tap  > [Create New Network](#)

Then follow the app instructions to complete the setup

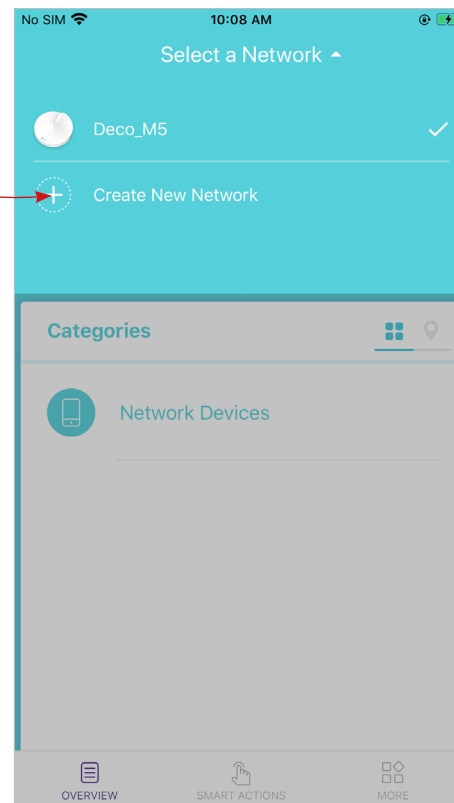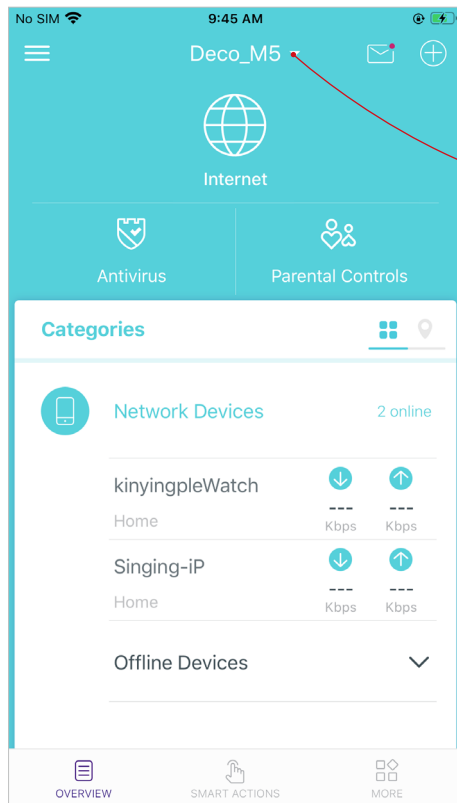


Create New Networks


On the Deco app, you can create different Deco networks bound to your TP-Link ID, and manage them conveniently from the Deco app with one account. You can also help family or friends by managing their network on your Deco app. Two methods are provided as below to create a new network:

Method 2. Create a new network from the Menu page


Tap  to open the Menu

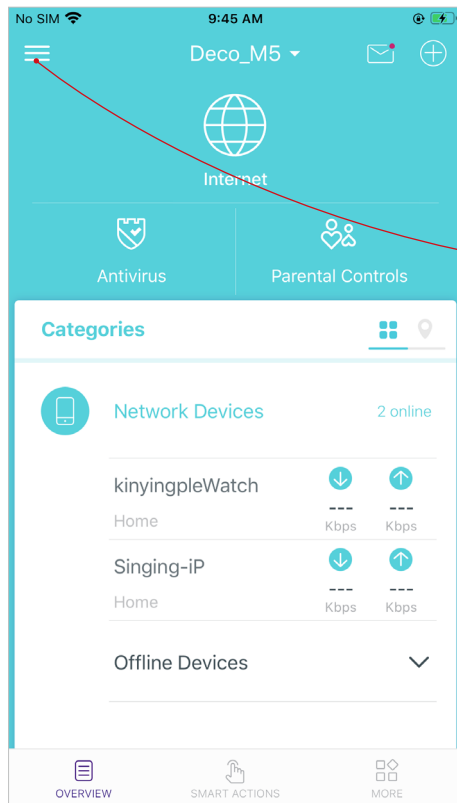

Tap  > [CREATE NEW NETWORK](#)

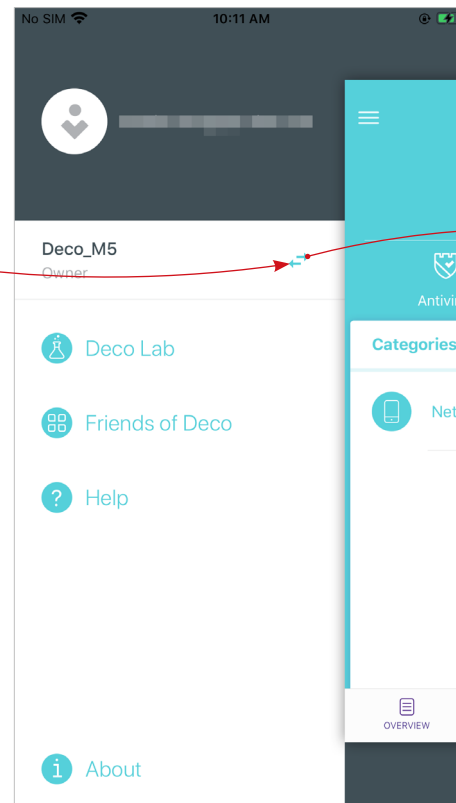

Follow app instructions to complete the setup

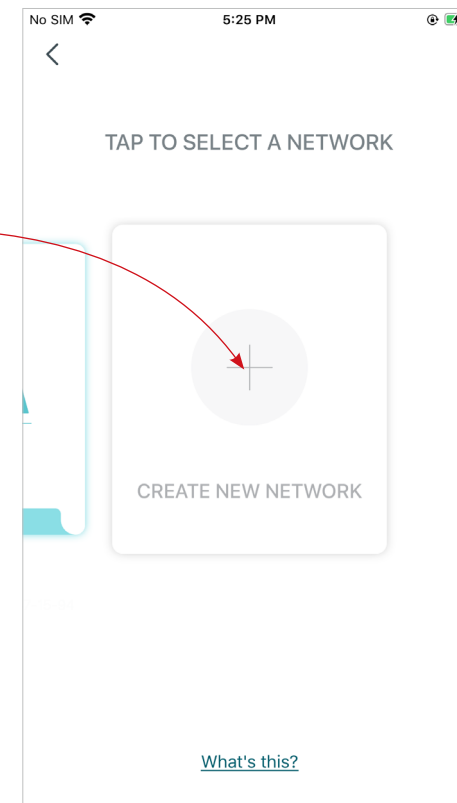



Remove/Reboot Deco





You can remove or reboot your Deco easily on the Deco app. Follow the steps below.

Tap  to check all Decos' status

Tap a Deco unit to enter the details

Tap  to remove or reboot the Deco


 Note: If the LED light of Deco does not turn pulsing blue after tapping Remove, refer to [Appearance](#) to use the reset button to reset it.

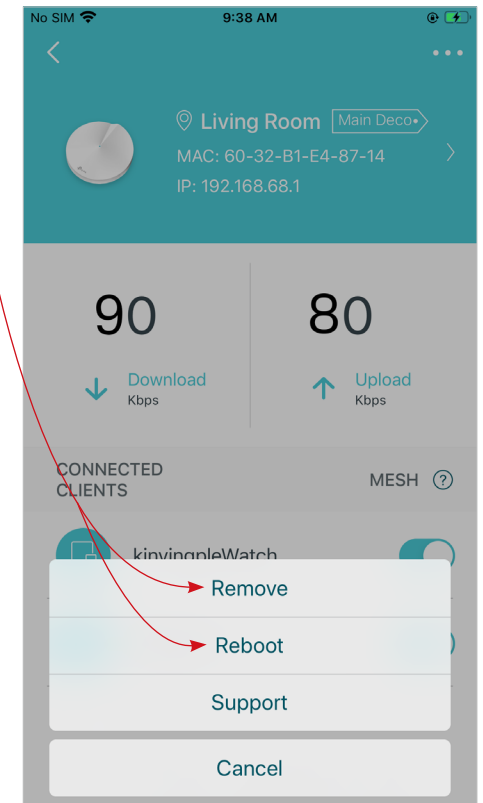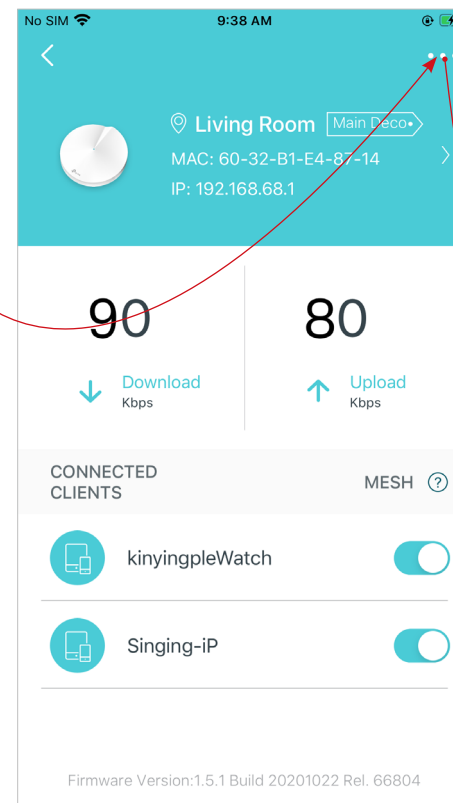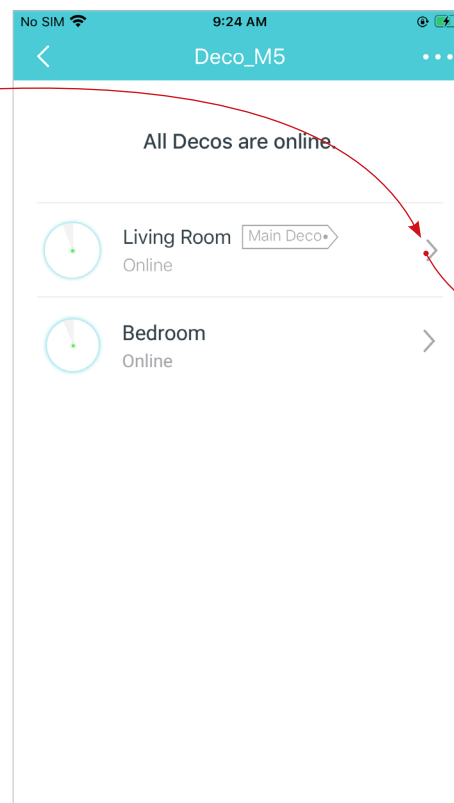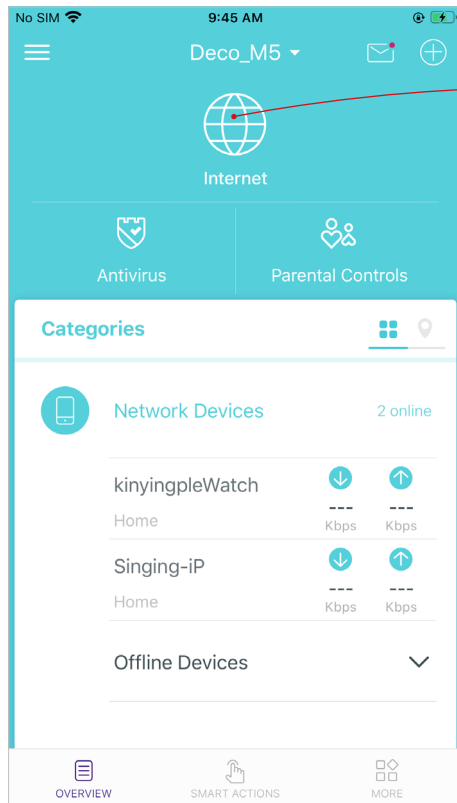


Shortcut

Shortcut lets you achieve an action with a simple tap.


Tap  > [Shortcut](#) > [CREATE](#)

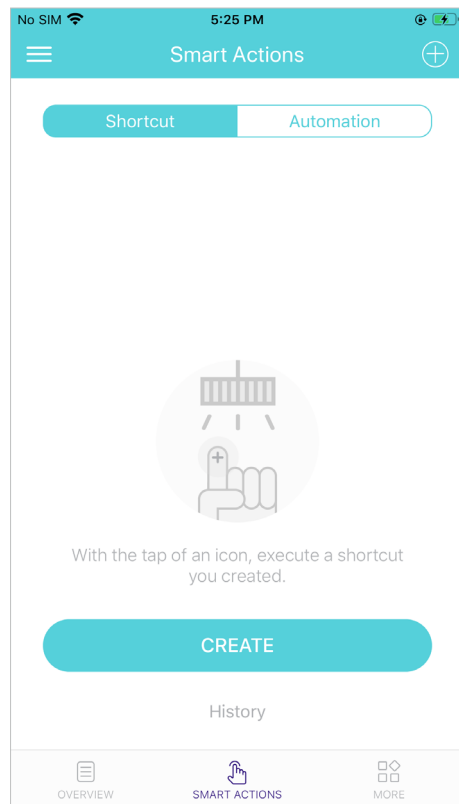


Add actions

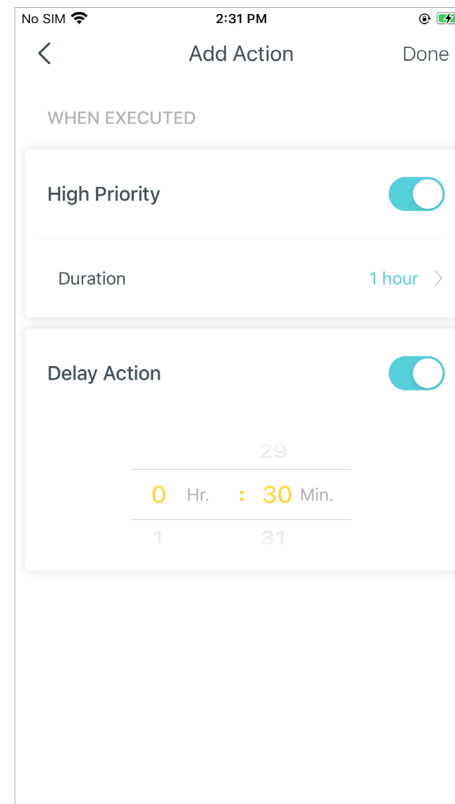

Create shortcuts

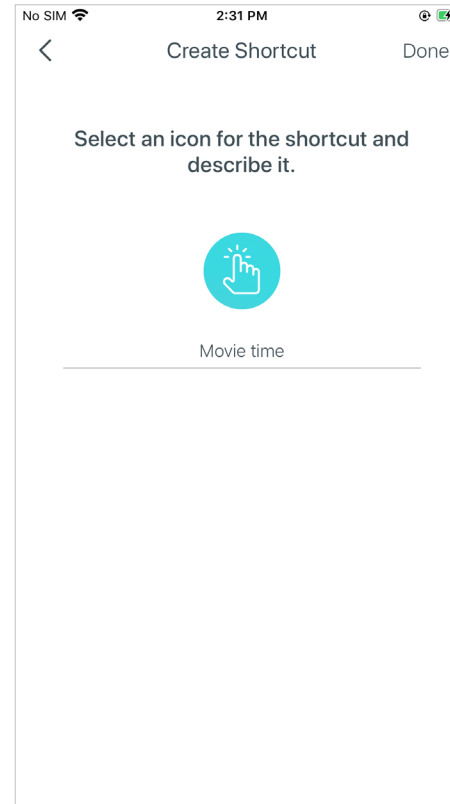


Tap the icon to execute the shortcut
Tap the name to edit the shortcut

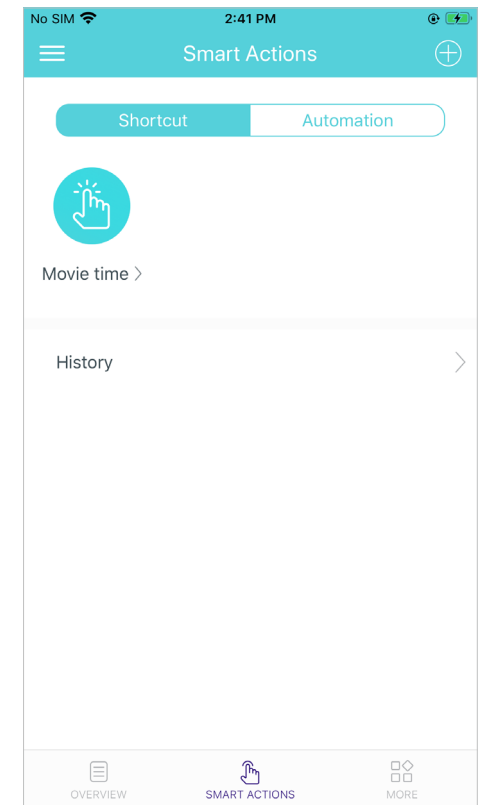


Automation

Automation allows you to set interactions between your smart devices by adding triggers and actions. For example, if the bedroom light turns on (which is a trigger), and then the air conditioner in the bedroom will start running (which is an action).


Tap  > Automation > CREATE

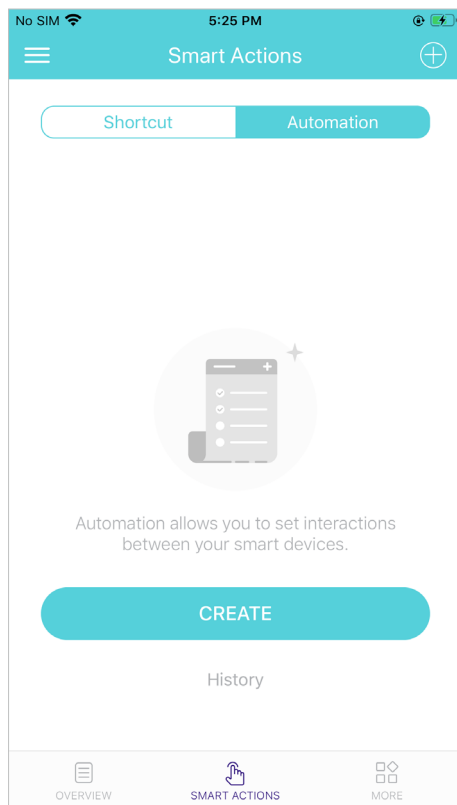


Set effective time

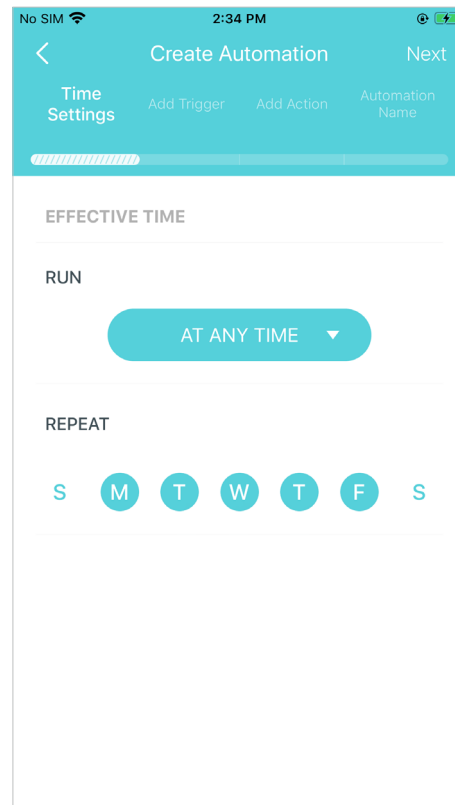


Add triggers

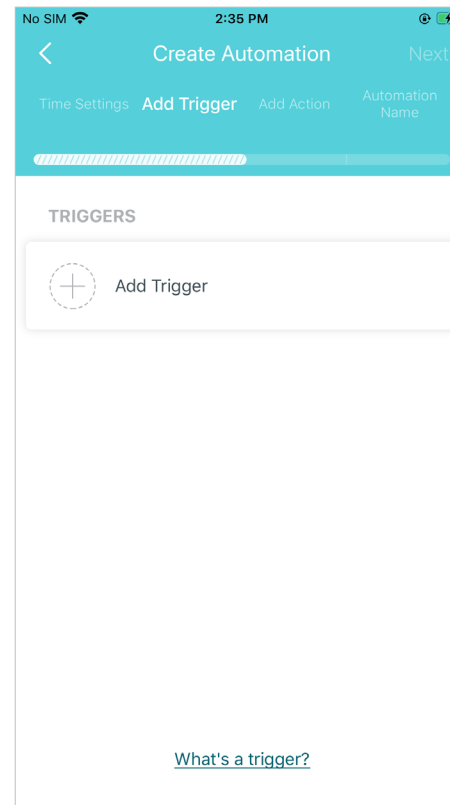


Add actions

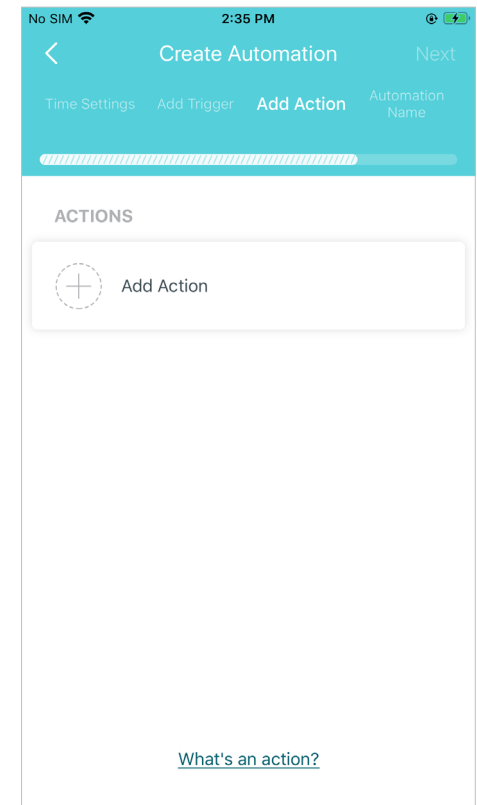

Set a name for the automation

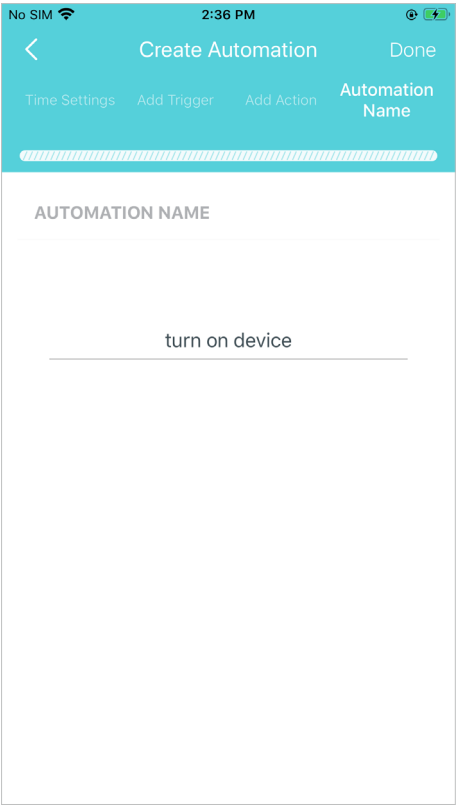

Automation setup complete

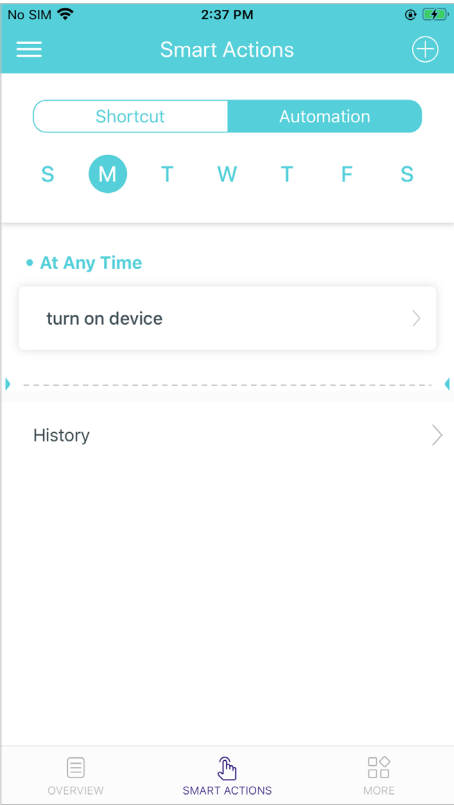

Wi-Fi Settings





You can change the network name and password of your main network, create a separate network for guests to guarantee the security and privacy of your main network, and shake your device to share the network details easily with family and friends.

Tap  > Wi-Fi

Manage your main network (e.g. change your Wi-Fi network name and password)

Enable guest network


Shake to share your network

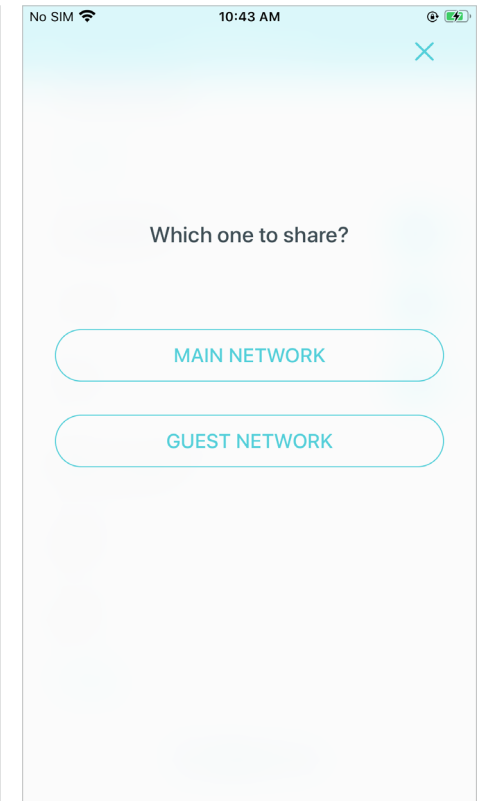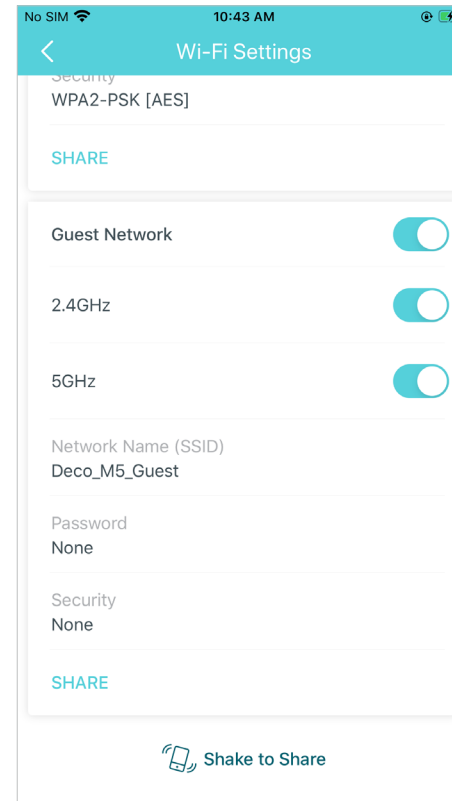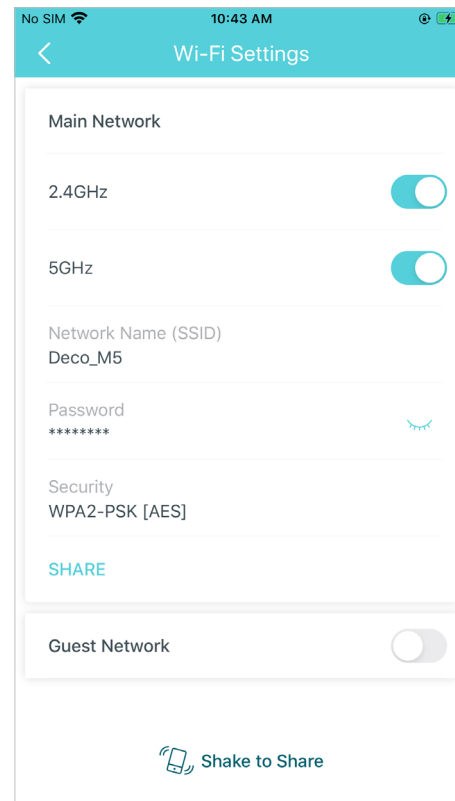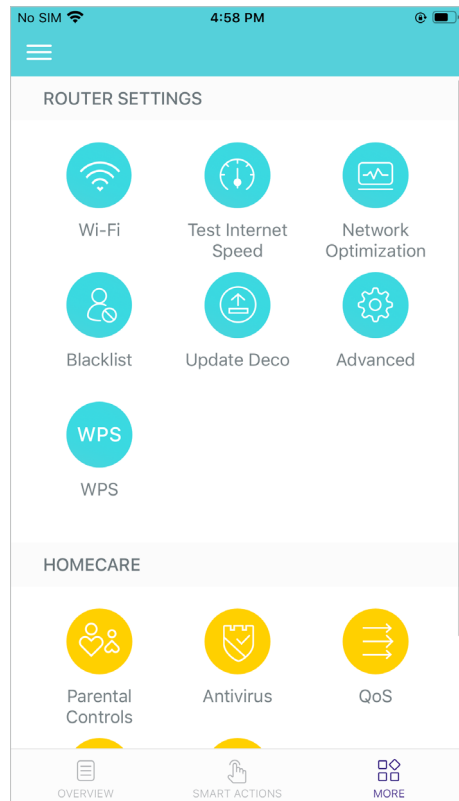


Internet Speed Test

Test your internet speed to see what you can do on your network. You will get an internet speed rating report after the test.


Tap  > Test Internet Speed

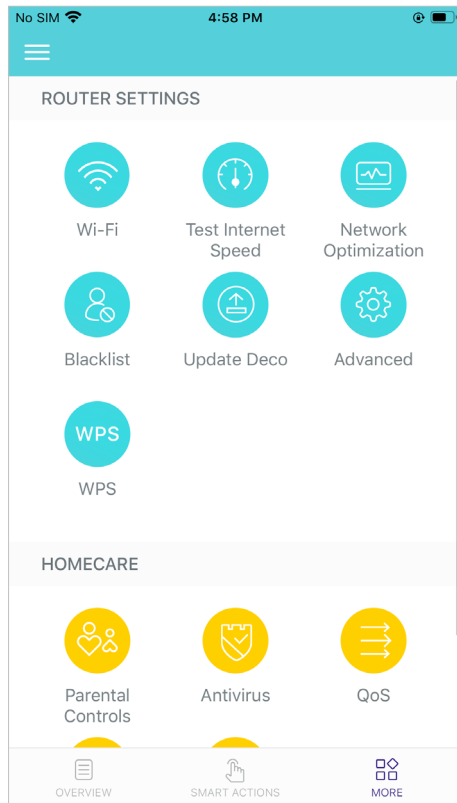


Tap **TEST** to start testing

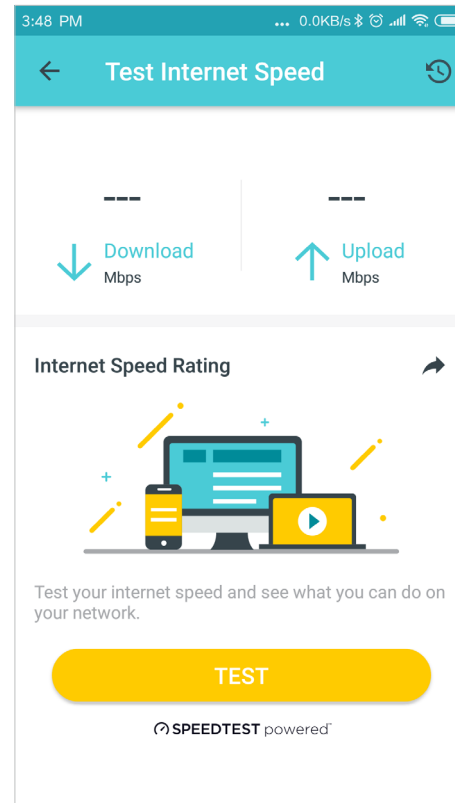

Get speed test report

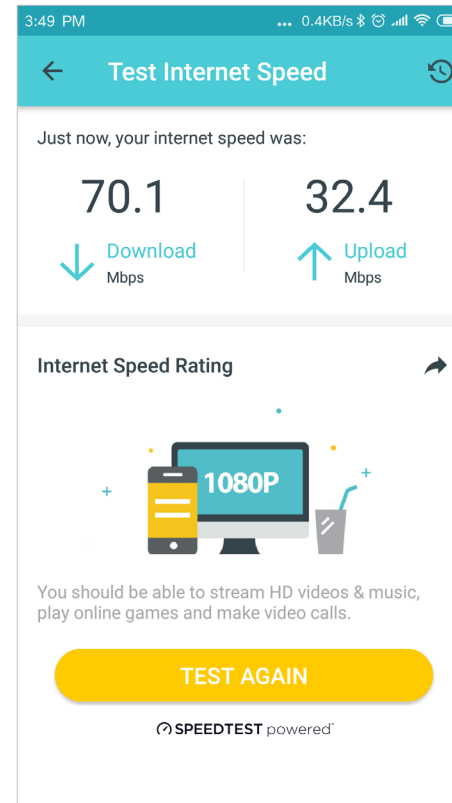

Tap  to check speed test history

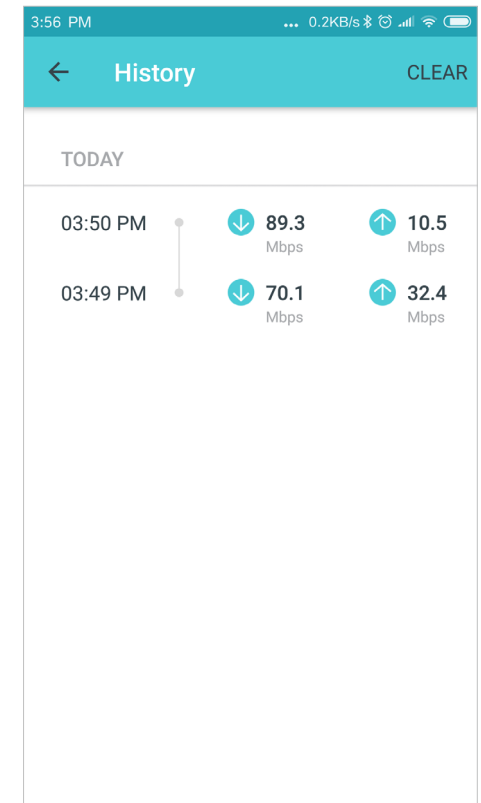

Network Optimization





Network Optimization lets your Deco intelligently scan for a clearer channel and switch your devices to it, ensuring optimal Wi-Fi performance.

Tap  > [Network Optimization](#)

The app will scan the network automatically

Optimize your network for optimal Wi-Fi performance


Enjoy your time if your network status is perfect

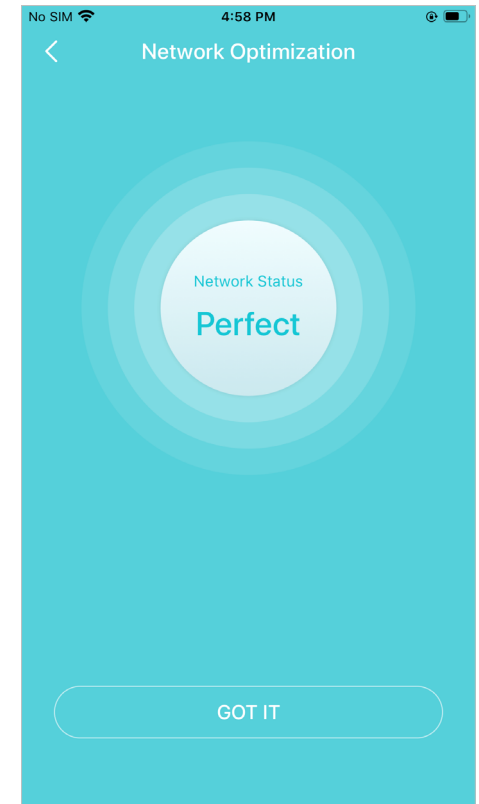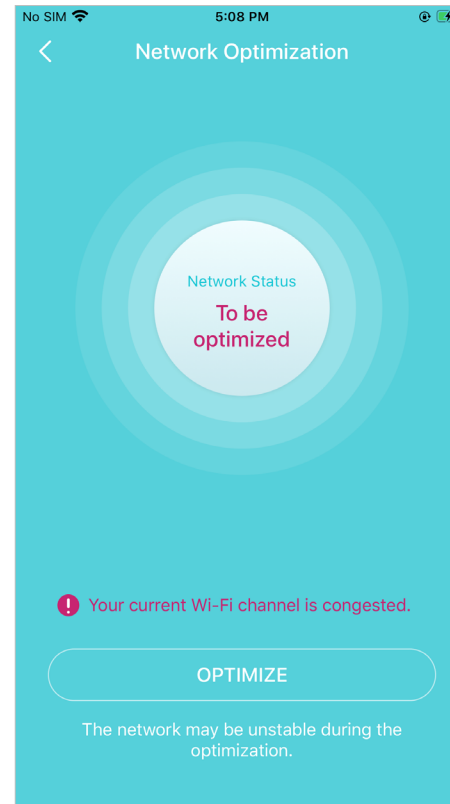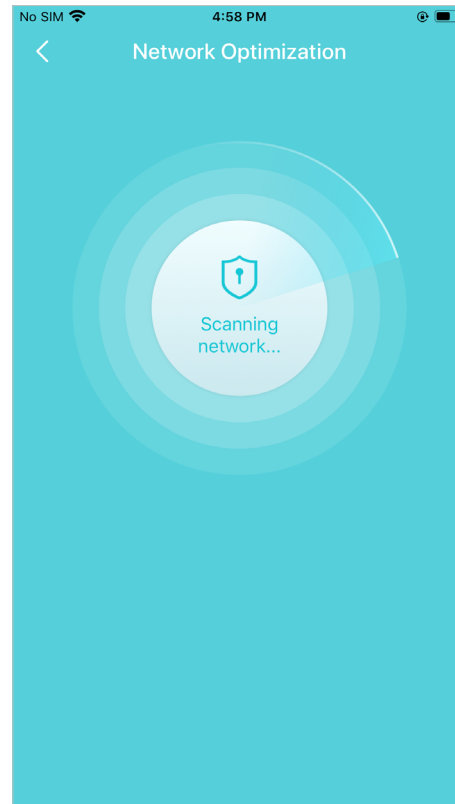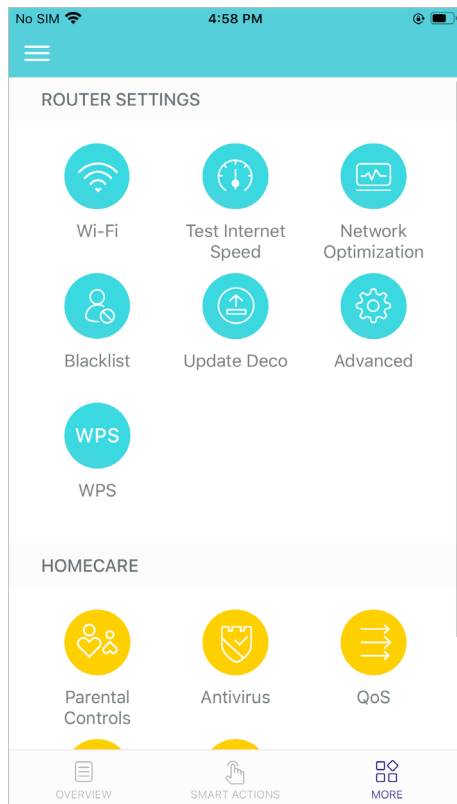


Blacklist

Compile a blacklist to avoid devices added on the blacklist to access to your network, ensuring the safety of your personal information shared in the network.


Tap  > **Blacklist**

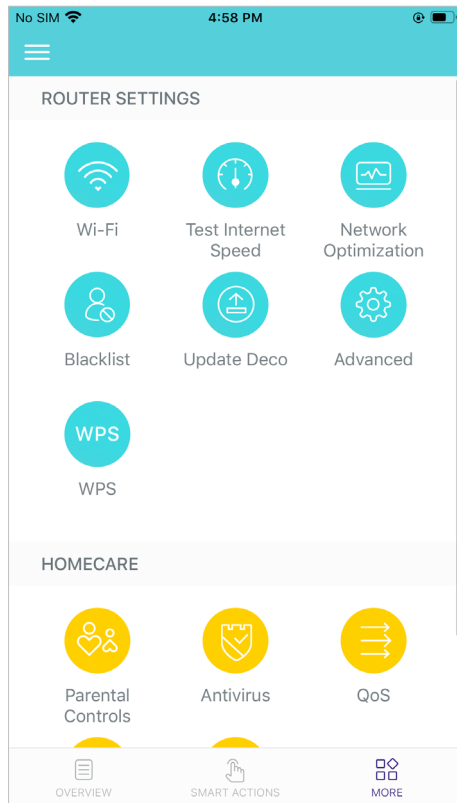


Add clients to blacklist

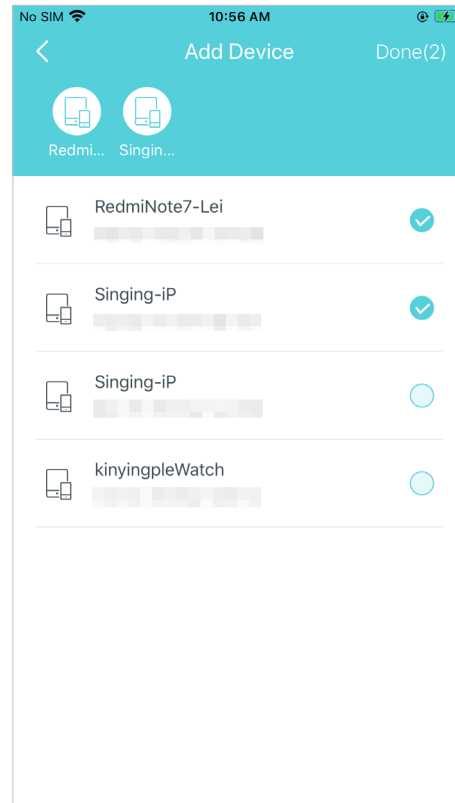

Add other devices to blacklist

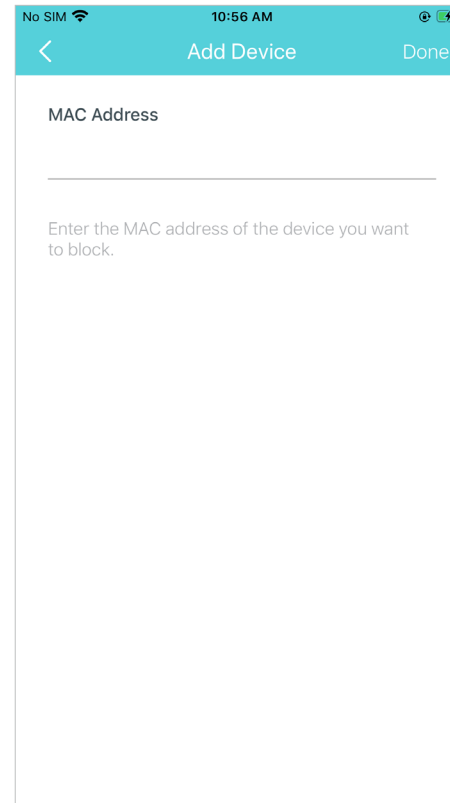

Manage blacklist

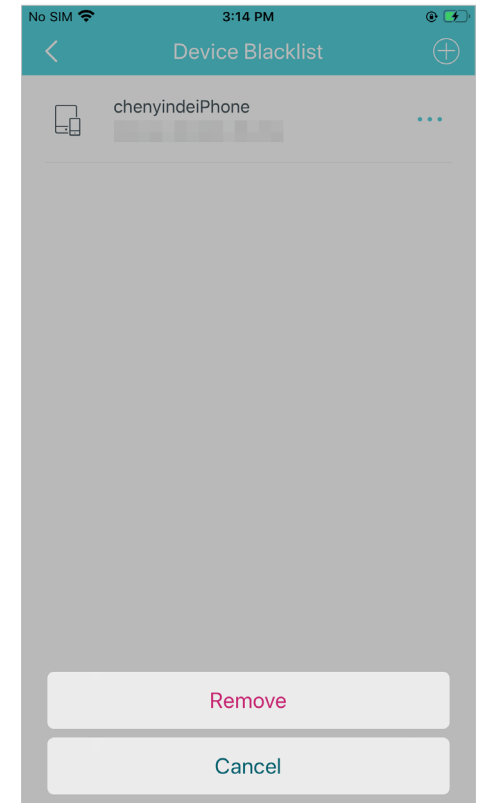


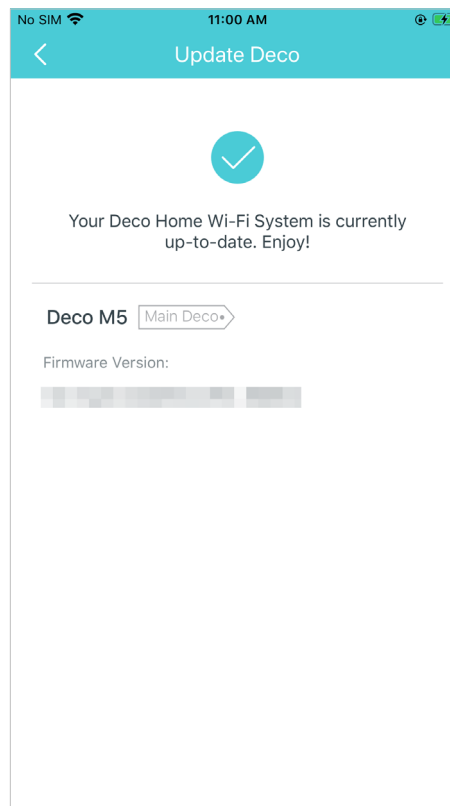
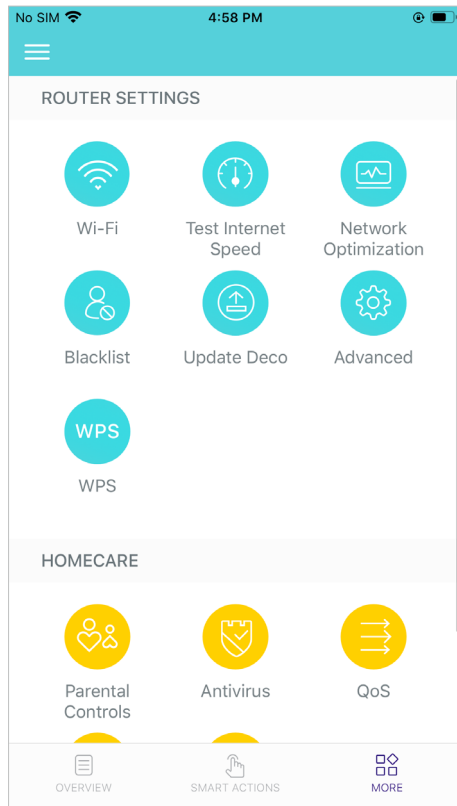
Online Upgrade

TP-Link is dedicated to improving product features and providing a better customer experience. An up-to-date firmware provides better and more stable network performance. Always update your Deco to the latest firmware version when prompted in the Deco app.

Tap  > [Update Deco](#)

Follow app instructions to update your Deco to the latest version


 Tip: If the firmware update fails, please reboot the main Deco, move the Satellite Deco closer to the main Deco, then try to update again.




WPS

WPS (Wi-Fi Protected Setup) helps you to quickly and securely connect a client to a network with a tap without entering any password.


Tap  > WPS

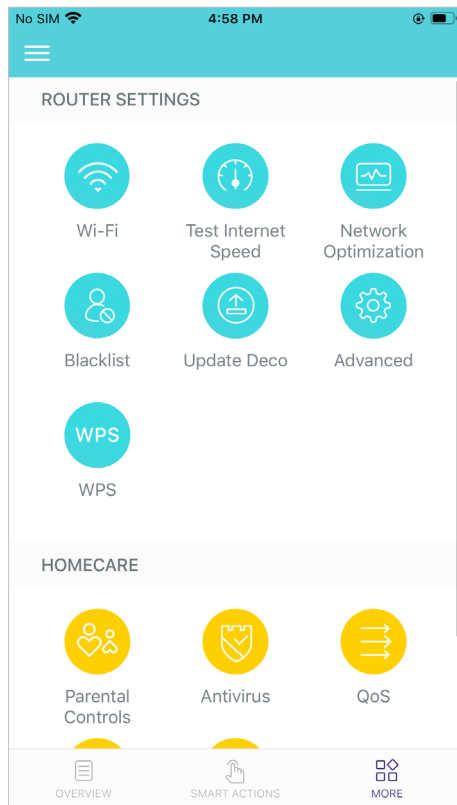

Tap the **WPS** icon on Deco app and then on your client

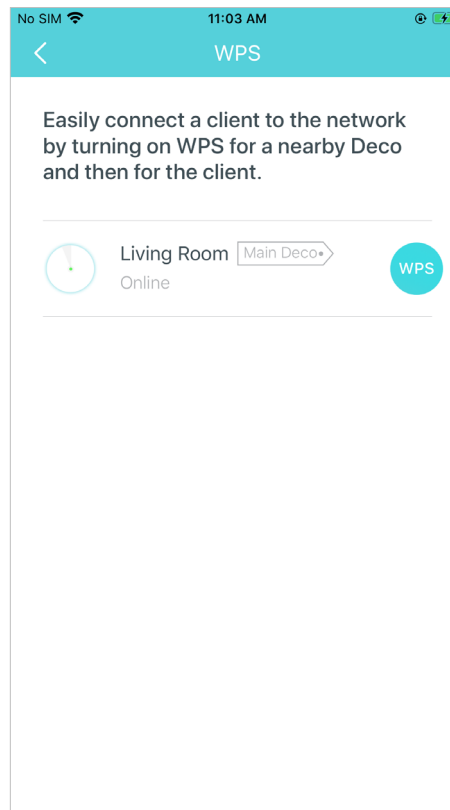

Your device connects to the network successfully if shown as below


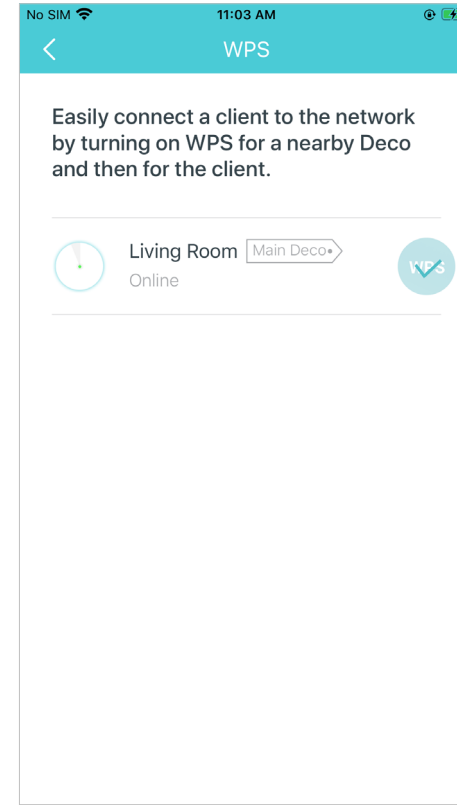


Parental Controls


Parental Controls allows you to filter content, limit time spent online and check internet history. Start by creating unique profiles for your family members.

Tap  > Parental Controls


Create unique profiles for family members

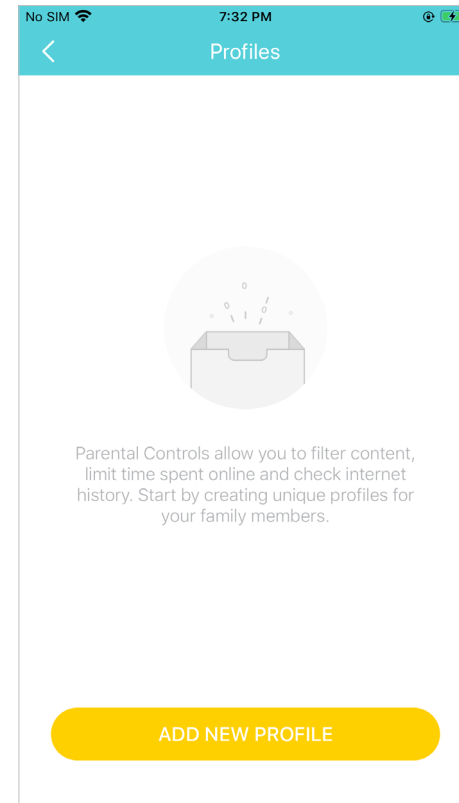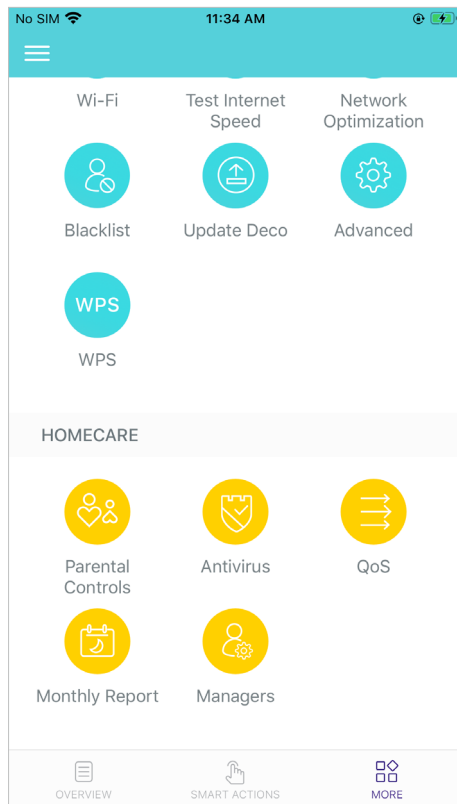

Set filter level to block inappropriate contents

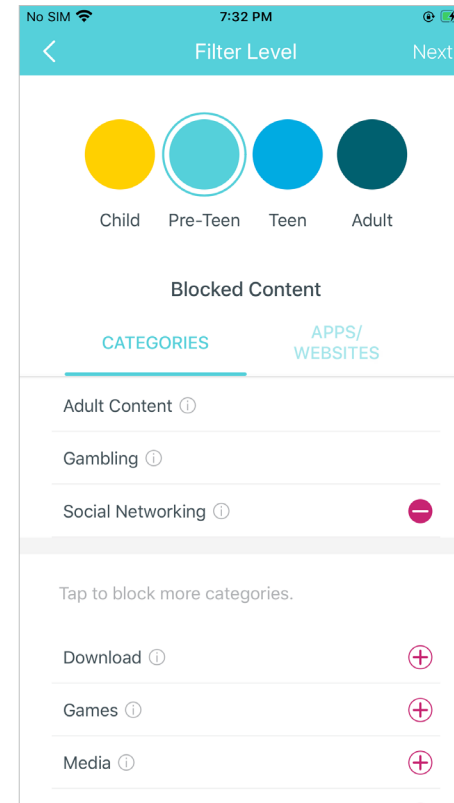


Set daily time limits for the total time spent online

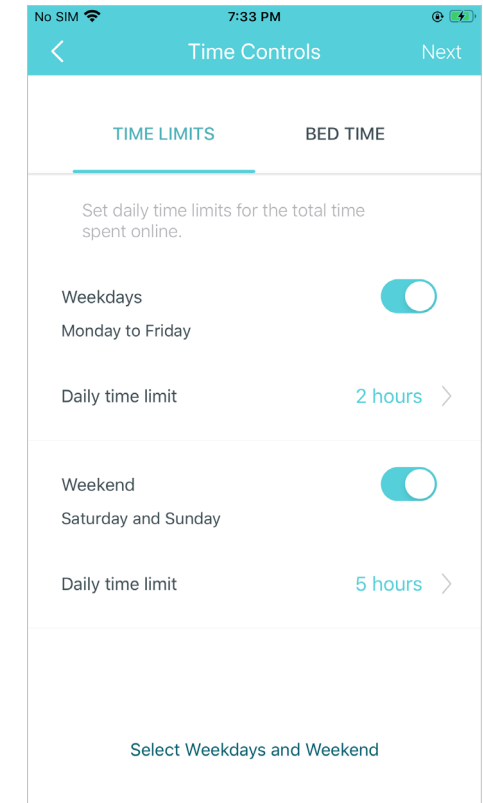


Antivirus

Deco's Antivirus feature blocks malicious websites to ensure you can safely surf the internet, protects your network against external attacks and eliminates vulnerabilities, and prevents infected devices from sending sensitive information or security threats to devices outside your network. Enable them all to keep your network safe all the time.


Tap  > [Antivirus](#)

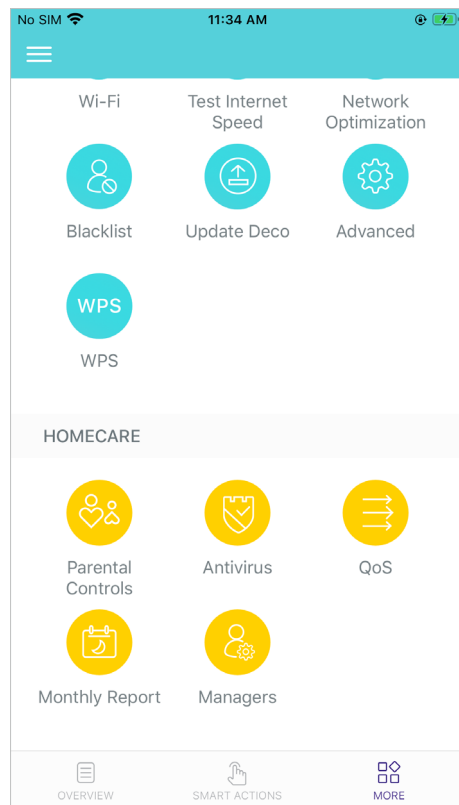

Enable the Antivirus features as needed

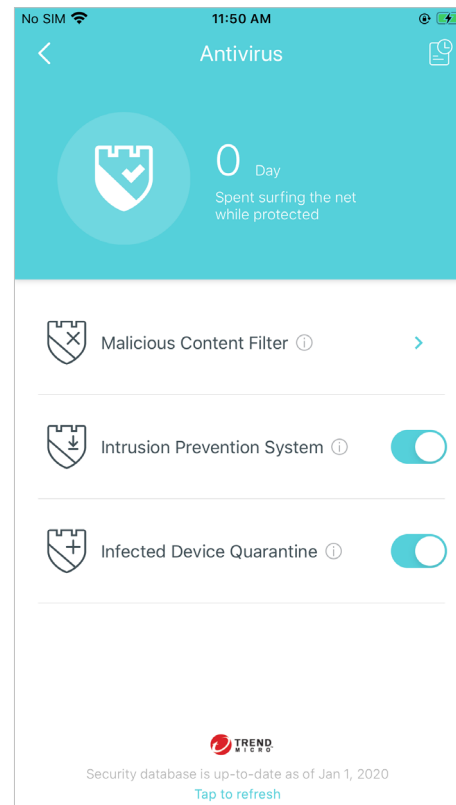


Add a website to Whitelist that will not be blocked.

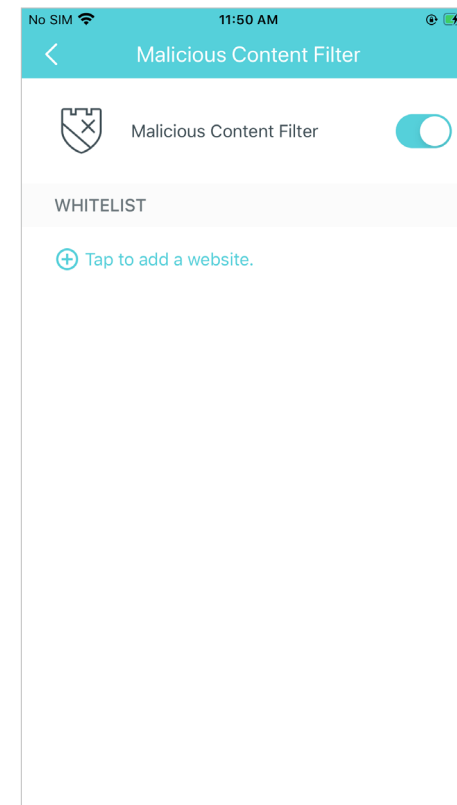


QoS

QoS (Quality of Service) helps you set priority for specific applications and devices, so that they can perform better with lower latency.


Tap  > QoS

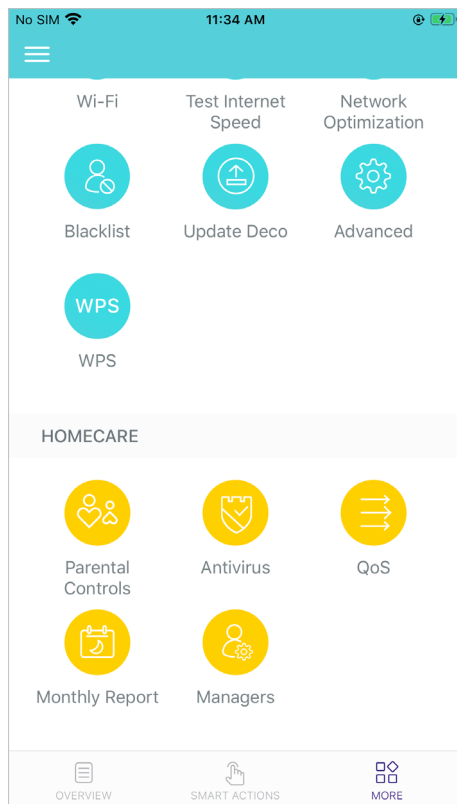


Set the total bandwidth before using QoS

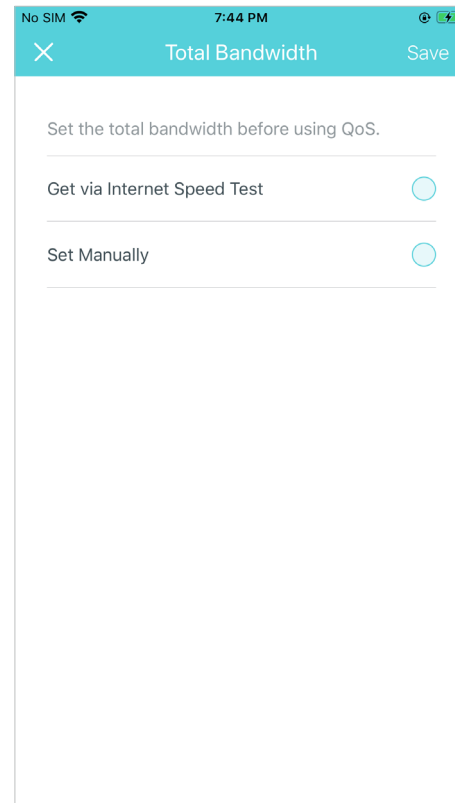

Tap to prioritize the online activity that's most important

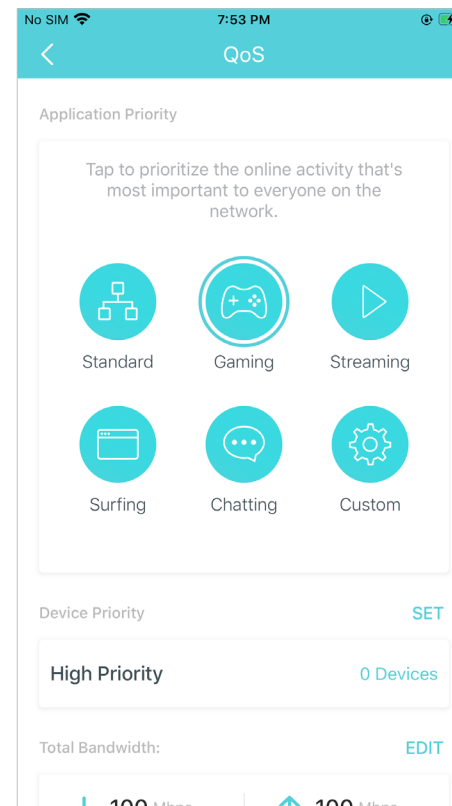


Add devices you want to prioritize to guarantee a better network performance

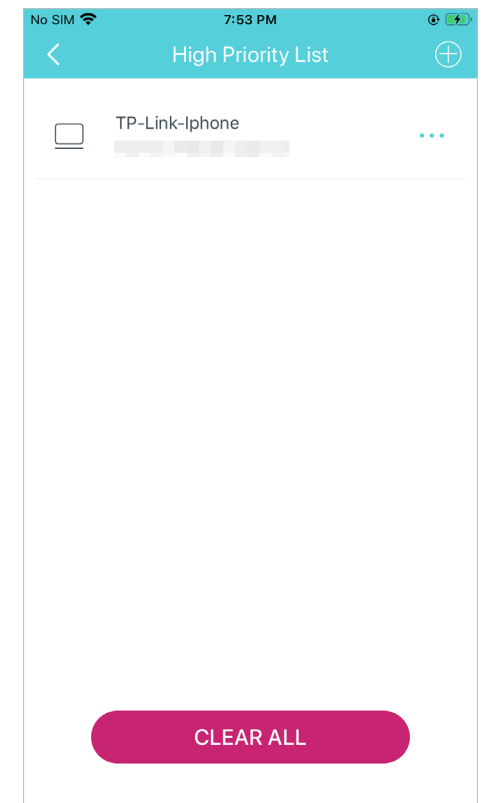


Monthly Report

Review the monthly usage statistics, such as security threats and total connected network devices each day.


Tap  > Monthly Report

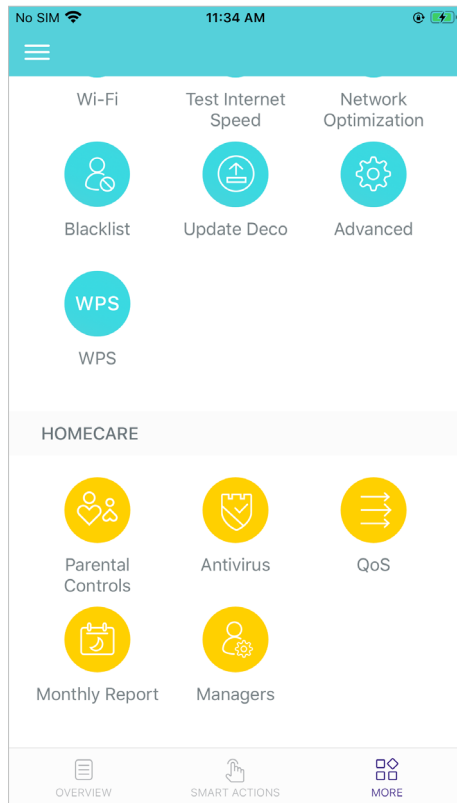


View monthly reports

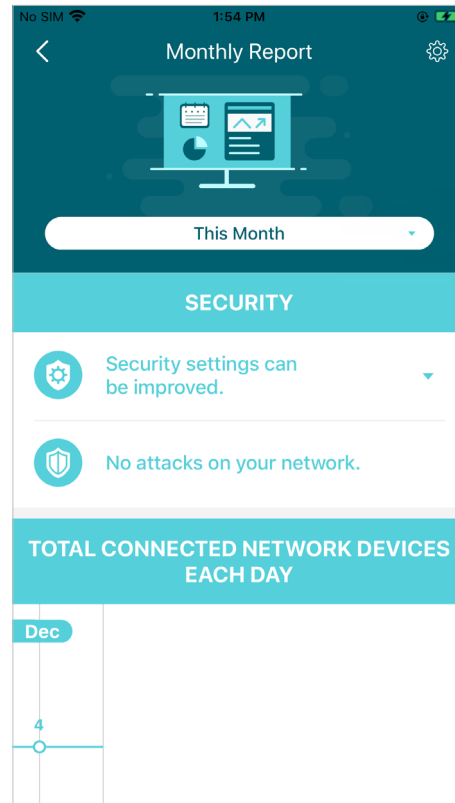

Enable or disable monthly report

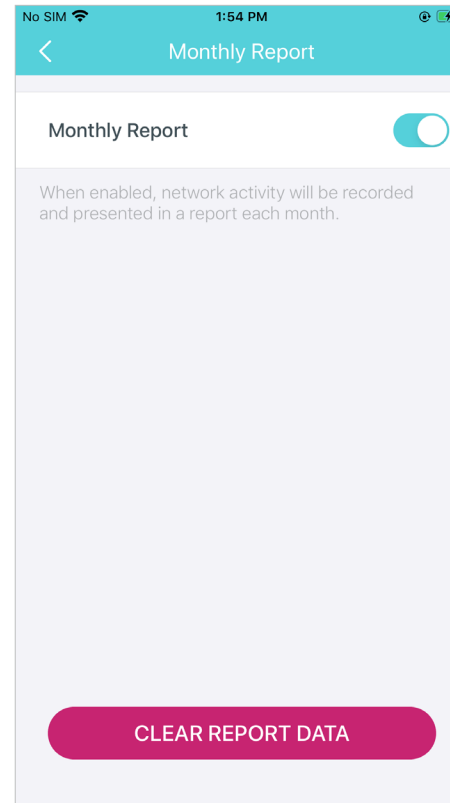


Clear monthly report data

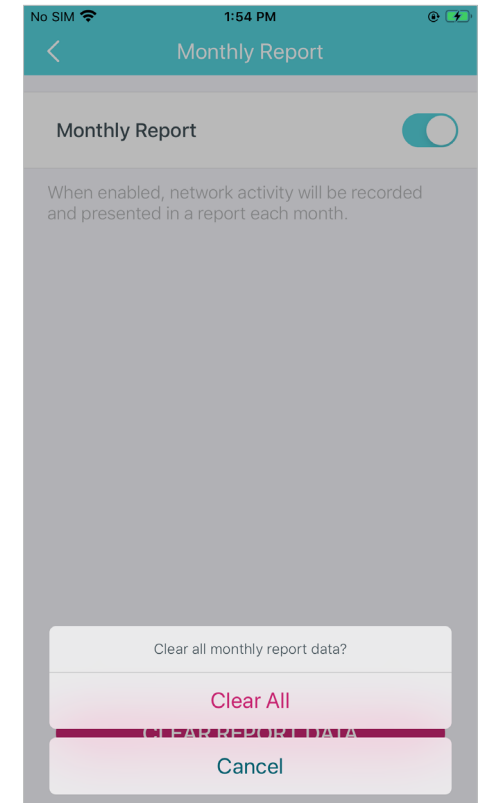


Managers

Add friends and family members to help manage your network. Each manager should have their own TP-Link ID.


Tap  > [Managers](#)

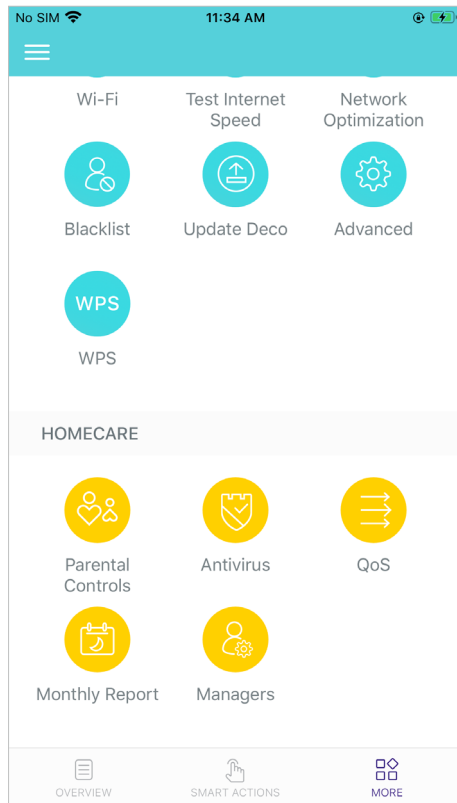


Add other accounts as managers

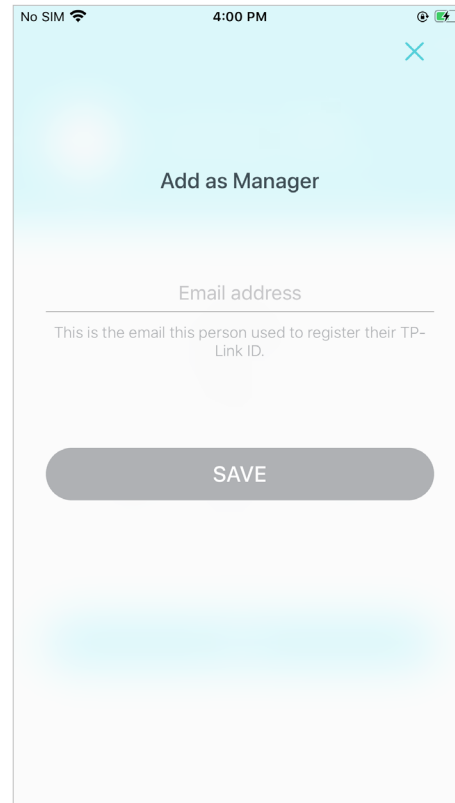

Set privileges for managers

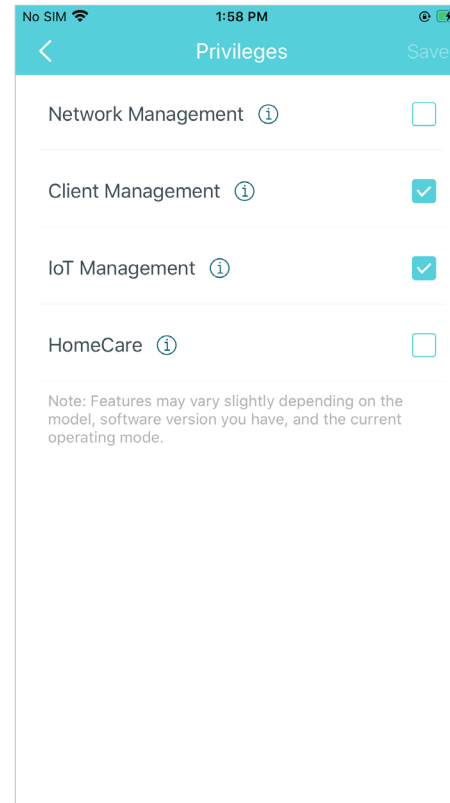

Remove manager

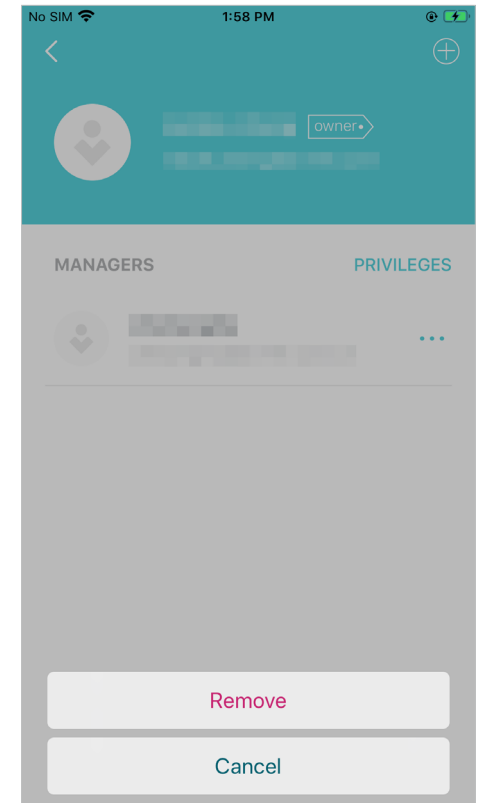

Advanced Features





Additional features are available under the Advanced menu. You can modify WAN settings (IPv4 & IPv6), add IPv6 firewall rules, modify LAN IP, set up DHCP server, enable VLAN/IPTV/MAC Clone mode, reserve the same IP address for a specific device, set up port forwarding rules to make your local computers accessible to other devices over the internet, enable TP-Link DDNS, SIP ALG, fast roaming and beamforming, control Deco's LED, change the working mode, and configure the notification settings.

Tap  > [Advanced](#)


View IPv4 details or change the internet connection type

Enable IPv6 to set up an IPv6 internet connection

Add IPv6 firewall rules to allow specific devices to access the specified services

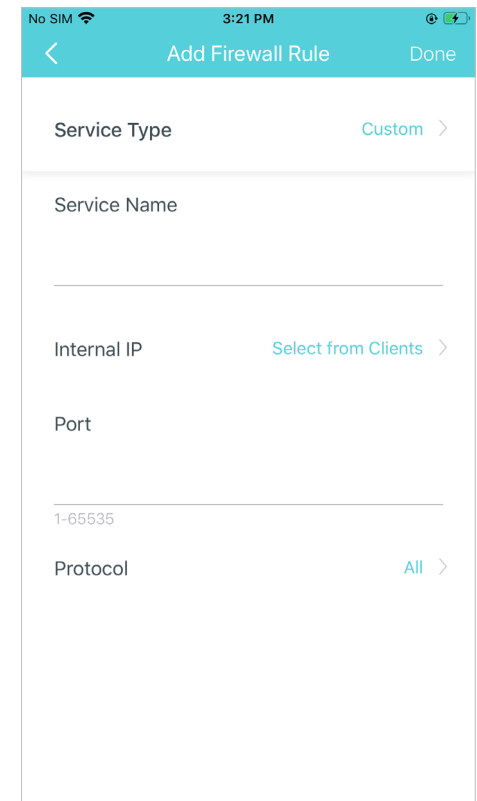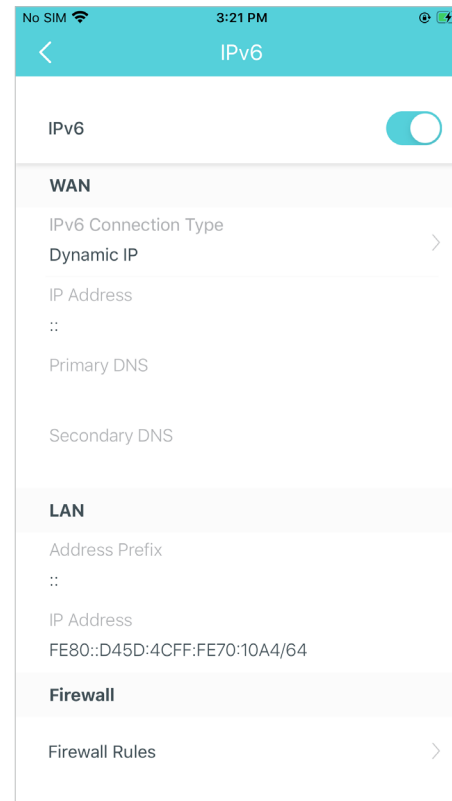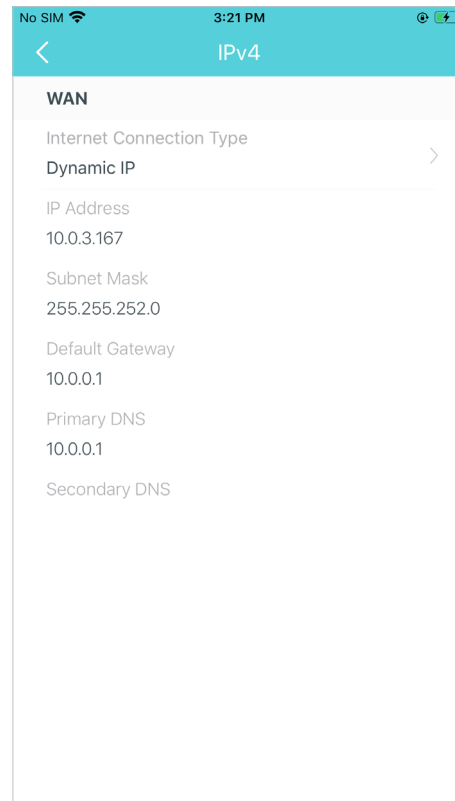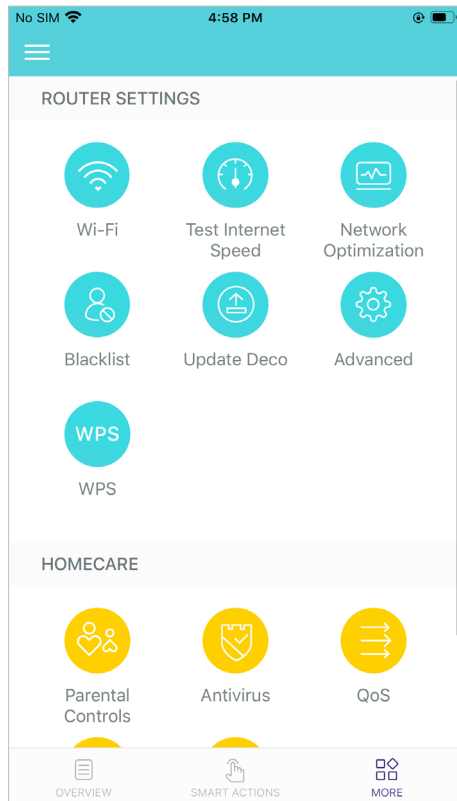

Modify LAN IP to avoid IP address conflict

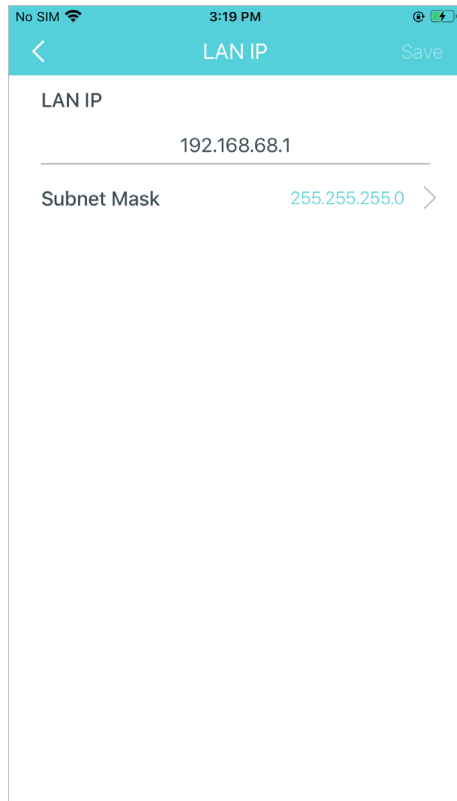

No SIM 3:19 PM


< LAN IP Save

LAN IP

192.168.68.1

Subnet Mask 255.255.255.0 >

Change DHCP server settings

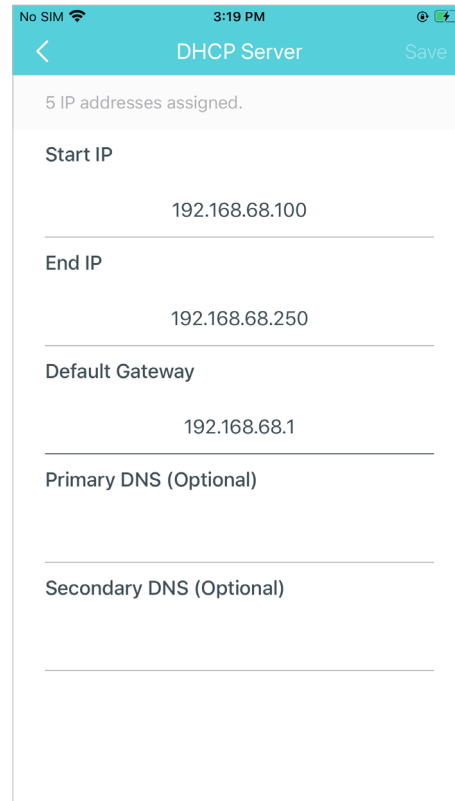

No SIM 3:19 PM

< DHCP Server Save

5 IP addresses assigned.

Start IP

192.168.68.100

End IP

192.168.68.250


Default Gateway

192.168.68.1

Primary DNS (Optional)

Secondary DNS (Optional)

Enable IPTV/VLAN mode to support IPTV services

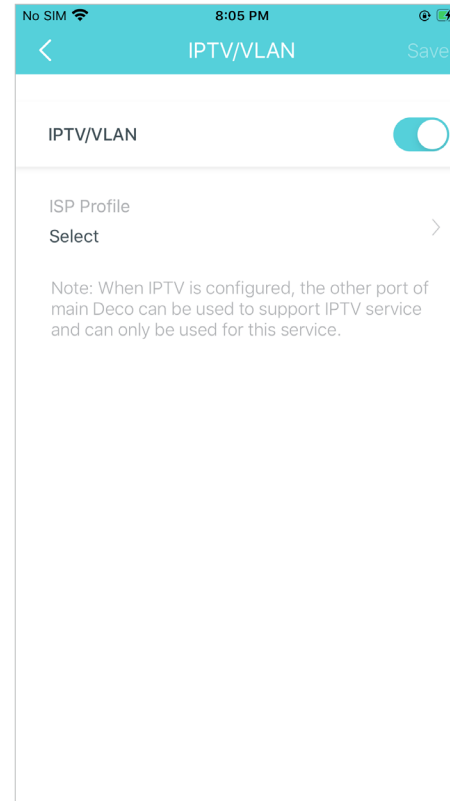

No SIM 8:05 PM

< IPTV/VLAN Save

IPTV/VLAN


ISP Profile

Select >

Note: When IPTV is configured, the other port of main Deco can be used to support IPTV service and can only be used for this service.

Enable MAC Clone if Deco fails to connect to the internet

Tip: For more about MAC Clone, refer to <https://www.tp-link.com/support/faq/2925/>

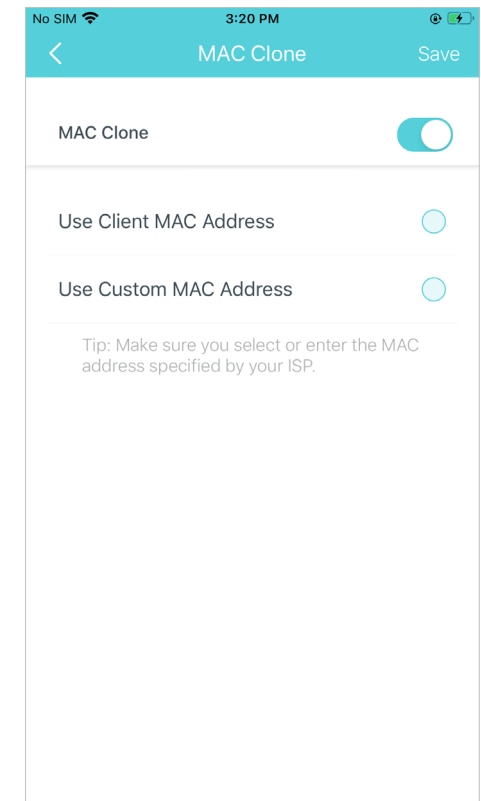

No SIM 3:20 PM

< MAC Clone Save


MAC Clone

Use Client MAC Address

Use Custom MAC Address

Tip: Make sure you select or enter the MAC address specified by your ISP.

Reserve IP addresses for specific devices to recognize and manage the device more easily

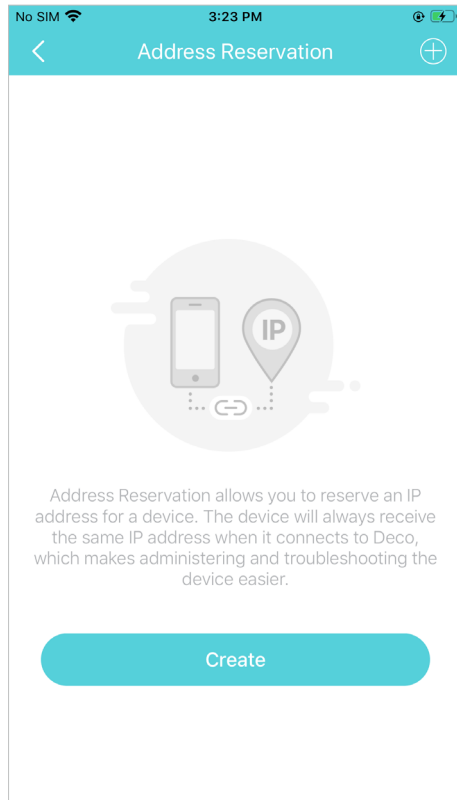


The screen shows the 'Address Reservation' settings. At the top, there's a teal header with a back arrow, the title 'Address Reservation', and a plus icon. Below the header is a large illustration of a smartphone connected to a location pin labeled 'IP'. Underneath the illustration, a paragraph explains that address reservation allows reserving an IP for a device. At the bottom, there is a large teal 'Create' button.

Address Reservation allows you to reserve an IP address for a device. The device will always receive the same IP address when it connects to Deco, which makes administering and troubleshooting the device easier.

Create

Set up port forwarding rules to enable devices in your network accessible over the internet with safety

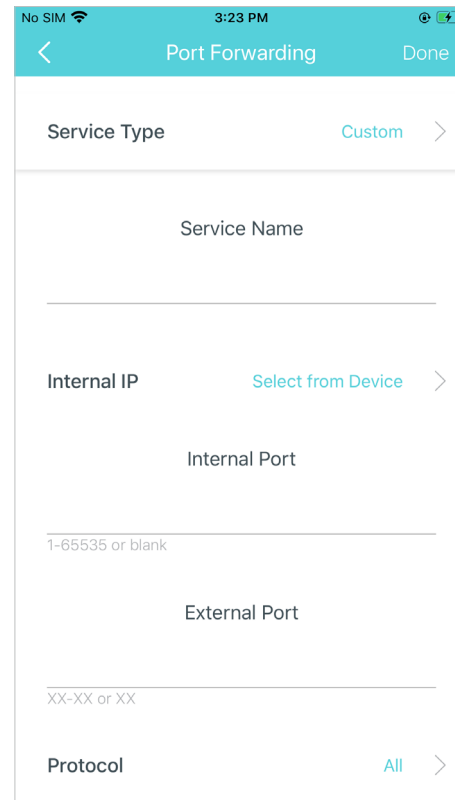

The screen shows the 'Port Forwarding' settings. The teal header includes a back arrow, the title 'Port Forwarding', and a 'Done' button. The settings are organized into sections: 'Service Type' (set to 'Custom'), 'Service Name' (with an empty input field), 'Internal IP' (with a 'Select from Device' link), 'Internal Port' (with an input field showing '1-65535 or blank'), 'External Port' (with an input field showing 'XX-XX or XX'), and 'Protocol' (set to 'All').

Service Type Custom

Service Name


Internal IP Select from Device

Internal Port 1-65535 or blank

External Port XX-XX or XX

Protocol All

Register a TP-Link DDNS domain name to access your router and local servers using a domain name

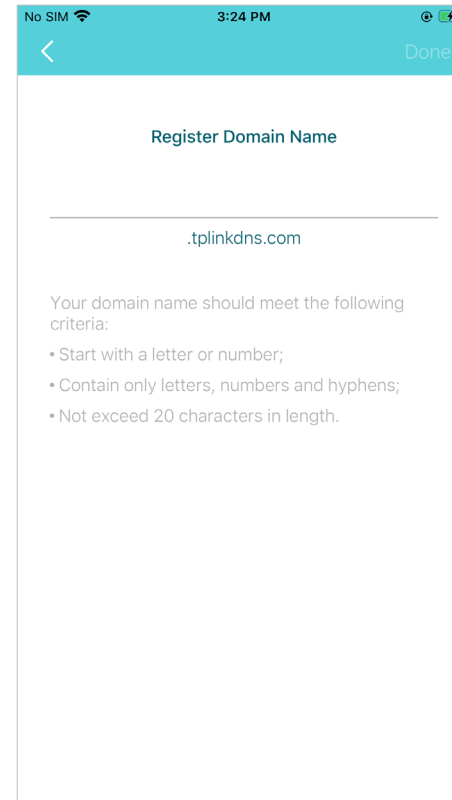

The screen shows the 'Register Domain Name' settings. The teal header has a back arrow and a 'Done' button. The main section is titled 'Register Domain Name' and features an input field containing '.tplinkdns.com'. Below this, a paragraph states that the domain name must meet certain criteria, followed by a bulleted list: start with a letter or number, contain only letters, numbers, and hyphens, and not exceed 20 characters in length.


Register Domain Name

.tplinkdns.com

Your domain name should meet the following criteria:

- Start with a letter or number;
- Contain only letters, numbers and hyphens;
- Not exceed 20 characters in length.

Enable SIP ALG to communicate with SIP (Session Initiation Protocol) servers via NAT)

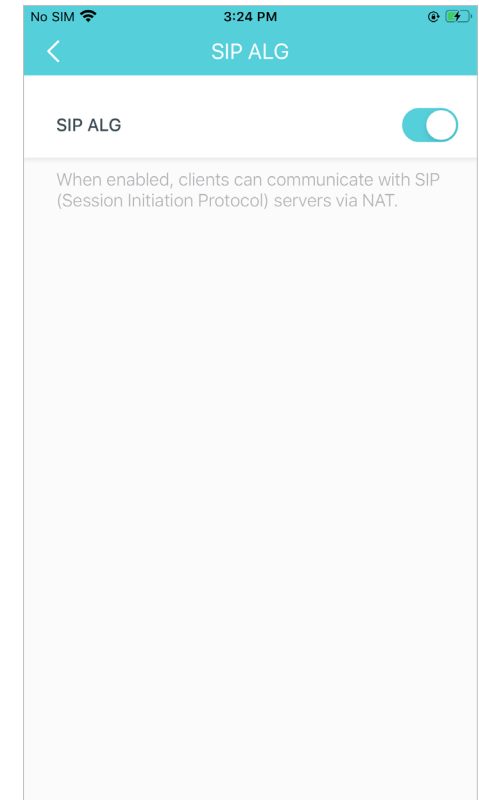


The screen shows the 'SIP ALG' settings. The teal header has a back arrow and the title 'SIP ALG'. The 'SIP ALG' toggle switch is turned on. Below the toggle, a paragraph explains that when enabled, clients can communicate with SIP servers via NAT.


SIP ALG

When enabled, clients can communicate with SIP (Session Initiation Protocol) servers via NAT.


Enable UPNP to enable devices on your local network to dynamically open ports for applications such as multiplayer gaming

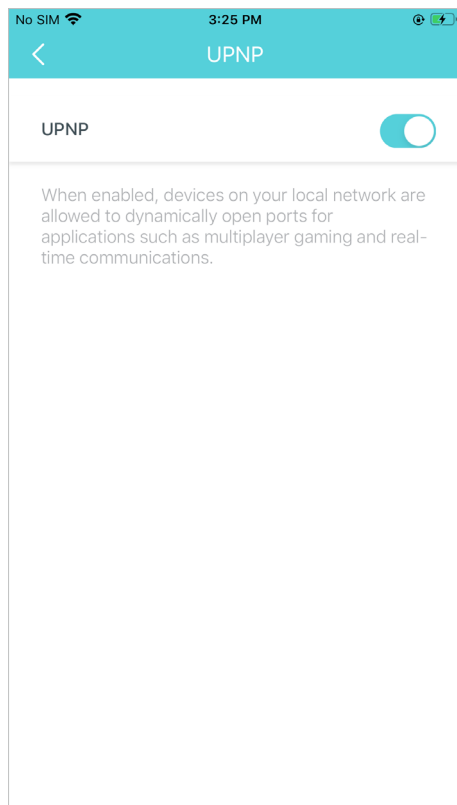


Enable Fast Roaming to allow your wireless devices to switch connection to different Decos seamlessly

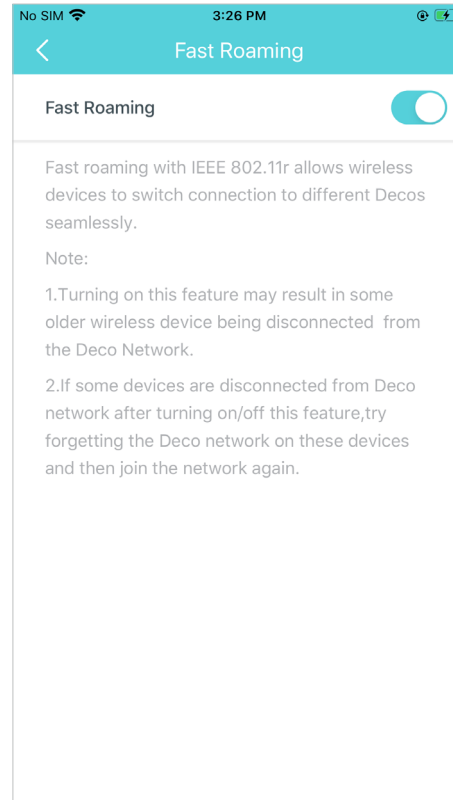

Enable Beamforming to concentrate Wi-Fi signal towards connected devices for stronger connections

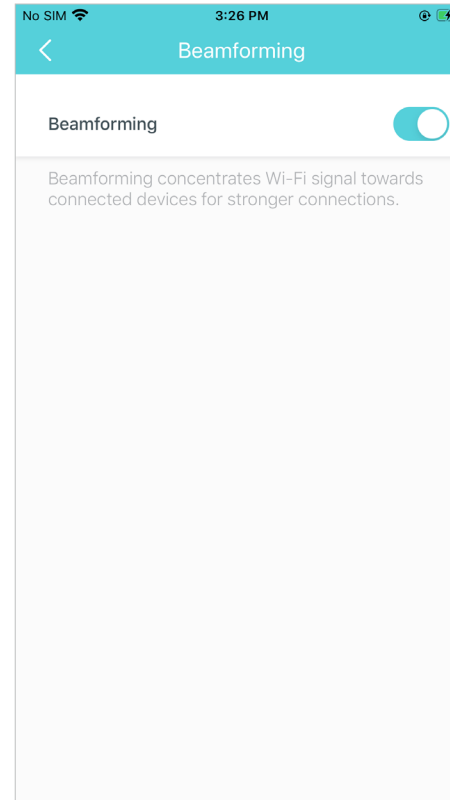


Toggle off LED to turn off the light on Deco. Configure the Night Mode to turn off the LED light at bedtime only

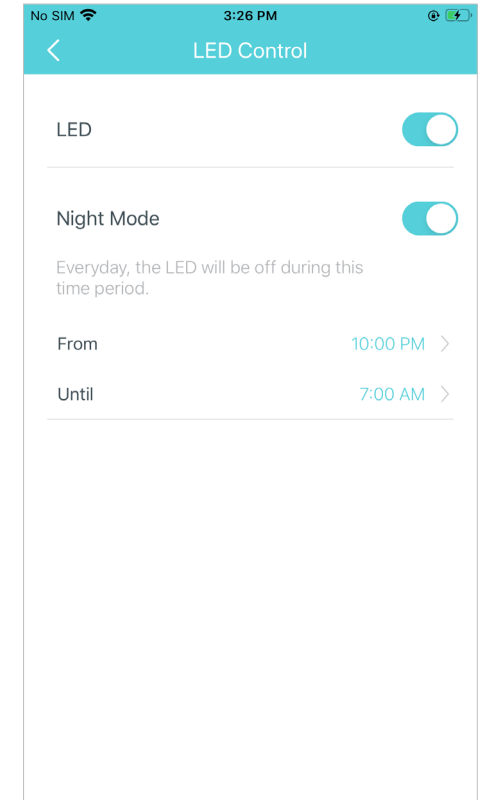


Change the operating mode


Note: When the Deco works in Access Point mode, advanced features such as IPv4, Address Reservation, Port Forwarding, and DHCP server are not available.

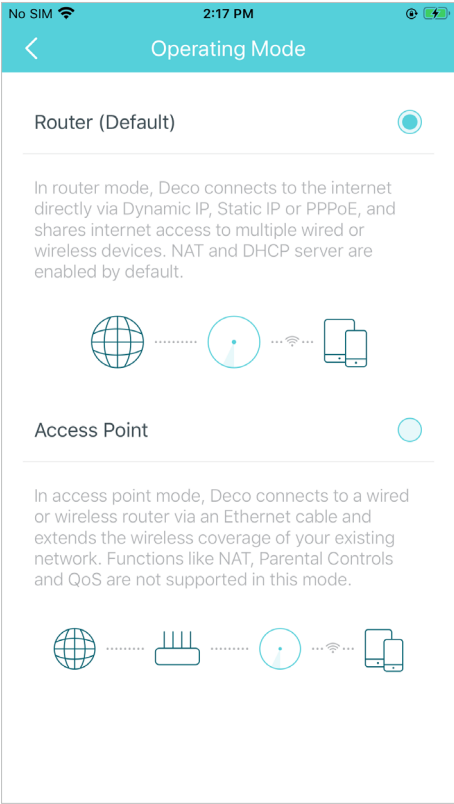

Set connection alerts to receive notifications once the clients connect to or disconnect from Deco

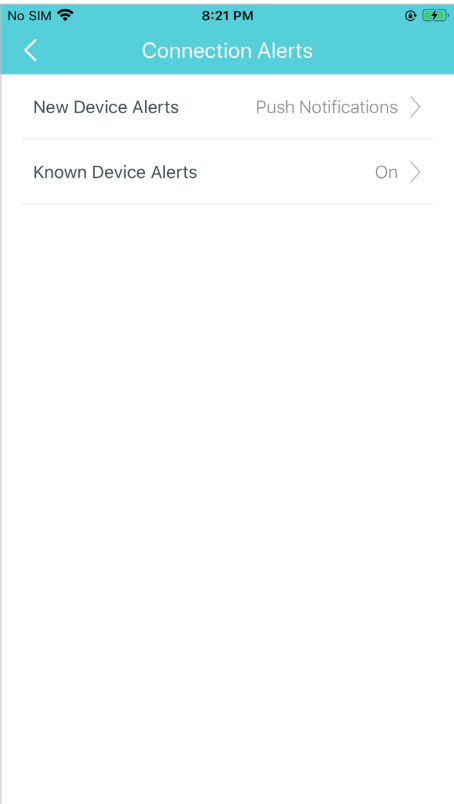

Set notifications to receive alerts in the notification bar

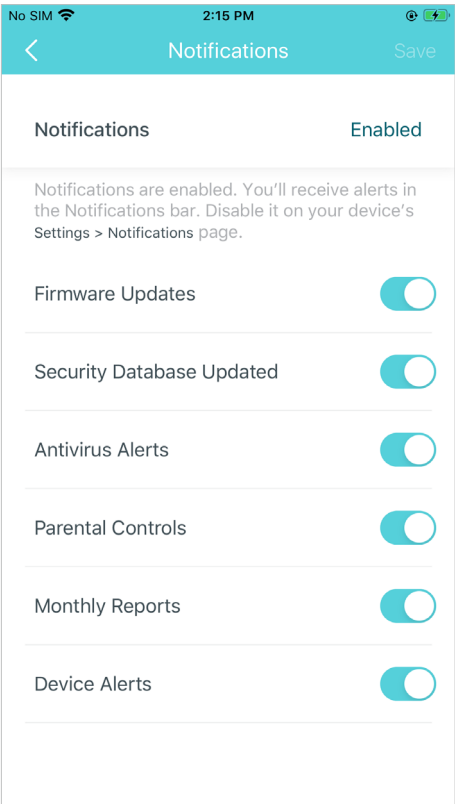

Authentication

FCC compliance information statement



Product Name: AC1300 Whole Home Mesh Wi-Fi System

Model Number: Deco M5

Component Name	Model
I.T.E. POWER SUPPLY	T120120-2B4

Responsible party:

TP-Link Systems Inc.

Address: 10 Mauchly, Irvine, CA 92618

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6804

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

We, TP-Link USA Corporation, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2024-11-20

FCC compliance information statement



Product Name: I.T.E POWER SUPPLY

Model Number: T120120-2B4

Responsible party:

TP-Link Systems Inc.

Address: 10 Mauchly, Irvine, CA 92618

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6804

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We, TP-Link USA Corporation, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2024-11-20

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

OPERATING FREQUENCY(the maximum transmitted power)

2412MHz—2483.5MHz (20dBm)

5150MHz—5250MHz (23dBm)

EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU declaration of conformity may be found at <https://www.tp-link.com/en/ce>.

RF Exposure Information

This device meets the EU requirements (2014/53/EU Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

National Restrictions

Attention: This device may only be used indoors in all EU member states and EFTA countries.

	AT	BE	BG	CH	CY	CZ	DE	DK
	EE	EL	ES	FI	FR	HR	HU	IE
	IS	IT	LI	LT	LU	LV	MT	NL
	NO	PL	PT	RO	SE	SI	SK	UK

Canadian Compliance Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil ne doit pas produire de brouillage;
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

Avertissement:

Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

Radiation Exposure Statement:


This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

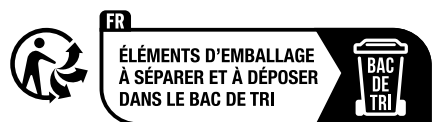

Korea Warning Statements:

당해 무선설비는 운용중 전파혼신 가능성이 있음.

NCC Notice & BSMI Notice:

注意！

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。。

安全諮詢及注意事項

- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先切斷電源。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 不要私自拆開機殼或自行維修，如產品有故障請與原廠或代理商聯繫。

限用物質含有情況標示聲明書

設備名稱：	型號（型式）：
Equipment name:	Type designation (Type)
AC1300 Whole Home Mesh Wi-Fi System	Deco M5

單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁺⁶)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
PCB	○	○	○	○	○	○
外殼	○	○	○	○	○	○
電源供應器	—	○	○	○	○	○
其他及其配件	—	○	○	○	○	○
<p>備考1. 超出0.1 wt %” 及 “超出0.01 wt %” 系指限用物質之百分比含量超出百分比含量基準值。</p> <p>Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.</p> <p>備考2. “○” 系指該項限用物質之百分比含量未超出百分比含量基準值。</p> <p>Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.</p> <p>備考3. “—” 系指該項限用物質為排除項目。</p> <p>Note 3: The “—” indicates that the restricted substance corresponds to the exemption.</p>						



Продукт сертифіковано згідно з правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.

EAC

Safety Information



- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Use only power supplies which are provided by manufacturer and in the original packing of this product. If you have any questions, please don't hesitate to contact us.
- Operating Temperature: 0°C~40°C (32°F~104°F)
- Temperatura Operacional: 0°C~40°C (32°F~104°F)
- This product uses radios and other components that emit electromagnetic fields. Electromagnetic fields and magnets may interfere with pacemakers and other implanted medical devices. Always keep the product and its power adapter more than 15 cm (6 inches) away from any pacemakers or other implanted medical devices. If you suspect your product is interfering with your pacemaker or any other implanted medical device, turn off your product and consult your physician for information specific to your medical device.













Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.










Explanation of the symbols on the product label/Explicação dos símbolos no rótulo do produto

Symbols may vary from products./Os símbolos podem variar de acordo com o produto.

Note: The product label can be found at the bottom of the product and its I.T.E. power supply./Observação: A etiqueta do produto pode ser encontrada na parte inferior do produto e de sua fonte de alimentação I.T.E.

Symbol Símbolo	Explanation Explicação
	Class II equipment Equipamento de classe II
	Class II equipment with functional earthing Equipamento de classe II com aterramento funcional

Symbol Símbolo	Explanation Explicação
	Alternating current Corrente alternada
	DC voltage Tensão DC
	Polarity of output terminals Polaridade dos terminais de saída
	Indoor use only Somente para uso interno
	Dangerous voltage Tensão perigosa
	Caution, risk of electric shock Cuidado, risco de choque elétrico
	Energy efficiency Marking Marcação de eficiência energética
	Protective earth Aterramento
	Earth Terra
	Frame or chassis Estrutura ou chassi
	Functional earthing Aterramento funcional
	Caution, hot surface Cuidado, superfície quente

Symbol Símbolo	Explanation Explicação
	Caution Cuidado
	Operator's manual Manual do operador
	Stand-by Em espera
	"ON"/"OFF" (push-push) "LIGADO"/"DESLIGADO" (pressionar)
	Fuse Fusível
	Fuse is used in neutral N O fusível é usado no neutro N
	<p>RECYCLING</p> <p>This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.</p> <p>User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.</p> <p>RECICLAGEM</p> <p>Este produto possui o símbolo de triagem seletiva para Resíduos de equipamentos elétricos e eletrônicos (REEE). Isso significa que este produto deve ser manuseado conforme a diretiva europeia 2012/19/UE para ser reciclado ou desmontado para minimizar seu impacto no meio ambiente. O usuário tem a opção de entregar seu produto a uma organização de reciclagem competente ou ao varejista quando compra um novo equipamento elétrico ou eletrônico.</p>
	Caution, avoid listening at high volume levels for long periods Atenção, evite ouvir em volumes elevados por longos períodos
	Disconnection, all power plugs Desconexão, todos os plugs de alimentação

Symbol Símbolo	Explanation Explicação
m	Switch of mini-gap construction Mudança de construção de mini-gap
μ	Switch of micro-gap construction (for US version) Switch of micro-gap / micro-disconnection construction (for other versions except US) Interruptor de construção de micro-gap (para versão dos EUA) Interruptor de construção de micro-gap / micro-desconexão (para outras versões, exceto EUA)
ε	Switch without contact gap (Semiconductor switching device) Interruptor sem folga de contato (dispositivo de comutação semicondutor)