#### STATE OF MAINE DEPARTMENT OF ENVIRONMENTAL PROTECTION





JANET T. MILLS **GOVERNOR** 

GERALD D. REID COMMISSIONER

April 3, 2020

Mr. Todd Langevin Division of Inland Fisheries & Wildlife State of Maine State House Station #41 Augusta, ME 04333

RE: Maine Pollutant Discharge Elimination System (MEPDES) Permit #ME0001091

Maine Waste Discharge License (WDL) Application #W002034-6F-F-R

Final Permit/License

Dear Mr. Langevin:

Enclosed please find a copy of your **final** MEPDES permit and Maine WDL **renewal** which was approved by the Department of Environmental Protection. Please read this permit/license renewal and its attached conditions carefully. Compliance with this permit/license will protect water quality.

Any interested person aggrieved by a Department determination made pursuant to applicable regulations, may appeal the decision following the procedures described in the attached DEP FACT SHEET entitled "Appealing a Department Licensing Decision."

If you have any questions regarding the matter, please feel free to call me at 287-1298.

Your Department compliance inspector copied below is also a resource that can assist you with compliance. Please do not hesitate to contact them with any questions.

Thank you for your efforts to protect and improve the waters of the great state of Maine!

Sincerely,

Breanne Blaisdell

Division of Water Quality Management

Bureau of Water Quality

B. Blaisdell

#### Enc.

cc:

Cindy Dionne, MDEP

James Crowley, MDEP

Pamela Parker, MDEP

Barry Mower, MDEP

Lori Mitchell, MDEP

Ellen Weitzer, USEPA

Alex Rosenberg, USEPA

Sandy Mojica, USEPA

Marelyn Vega, USEPA

Richard Carvalho, USEPA

Shelley Puleo, USEPA

Anna Harris, USFWS

Sean Mahoney, CLF

Maine Dept. Inland Fisheries and Wildlife Environmental Review

Maine Dept. Marine Resources Environmental Review



## **DEP INFORMATION SHEET**

### **Appealing a Department Licensing Decision**

Dated: November 2018 Contact: (207) 287-2452

#### **SUMMARY**

There are two methods available to an aggrieved person seeking to appeal a licensing decision made by the Department of Environmental Protection's (DEP) Commissioner: (1) an administrative process before the Board of Environmental Protection (Board); or (2) a judicial process before Maine's Superior Court. An aggrieved person seeking review of a licensing decision over which the Board had original jurisdiction may seek judicial review in Maine's Superior Court.

A judicial appeal of final action by the Commissioner or the Board regarding an application for an expedited wind energy development (35-A M.R.S. § 3451(4)) or a general permit for an offshore wind energy demonstration project (38 M.R.S. § 480-HH(1)) or a general permit for a tidal energy demonstration project (38 M.R.S. § 636-A) must be taken to the Supreme Judicial Court sitting as the Law Court.

This information sheet, in conjunction with a review of the statutory and regulatory provisions referred to herein, can help a person to understand his or her rights and obligations in filing an administrative or judicial appeal.

#### I. ADMINISTRATIVE APPEALS TO THE BOARD

#### **LEGAL REFERENCES**

The laws concerning the DEP's *Organization and Powers*, 38 M.R.S. §§ 341-D(4) & 346; the *Maine Administrative Procedure Act*, 5 M.R.S. § 11001; and the DEP's *Rules Concerning the Processing of Applications and Other Administrative Matters* ("Chapter 2"), 06-096 C.M.R. ch. 2.

#### DEADLINE TO SUBMIT AN APPEAL TO THE BOARD

The Board must receive a written appeal within 30 days of the date on which the Commissioner's decision was filed with the Board. Appeals filed more than 30 calendar days after the date on which the Commissioner's decision was filed with the Board will be dismissed unless notice of the Commissioner's license decision was required to be given to the person filing an appeal (appellant) and the notice was not given as required.

#### HOW TO SUBMIT AN APPEAL TO THE BOARD

Signed original appeal documents must be sent to: Chair, Board of Environmental Protection, 17 State House Station, Augusta, ME 04333-0017. An appeal may be submitted by fax or e-mail if it contains a scanned original signature. It is recommended that a faxed or e-mailed appeal be followed by the submittal of mailed original paper documents. The complete appeal, including any attachments, must be received at DEP's offices in Augusta on or before 5:00 PM on the due date; materials received after 5:00 pm are not considered received until the following day. The risk of material not being received in a timely manner is on the sender, regardless of the method used. The appellant must also send a copy of the appeal documents to the Commissioner of the DEP; the applicant (if the appellant is not the applicant in the license proceeding at issue); and if a hearing was held on the application, any intervenor in that hearing process. All of the information listed in the next section of this information sheet must be submitted at the time the appeal is filed.

#### INFORMATION APPEAL PAPERWORK MUST CONTAIN

Appeal materials must contain the following information at the time the appeal is submitted:

- 1. *Aggrieved Status*. The appeal must explain how the appellant has standing to maintain an appeal. This requires an explanation of how the appellant may suffer a particularized injury as a result of the Commissioner's decision.
- 2. The findings, conclusions, or conditions objected to or believed to be in error. The appeal must identify the specific findings of fact, conclusions regarding compliance with the law, license conditions, or other aspects of the written license decision or of the license review process that the appellant objects to or believes to be in error.
- 3. The basis of the objections or challenge. For the objections identified in Item #2, the appeal must state why the appellant believes that the license decision is incorrect and should be modified or reversed. If possible, the appeal should cite specific evidence in the record or specific licensing requirements that the appellant believes were not properly considered or fully addressed.
- 4. *The remedy sought*. This can range from reversal of the Commissioner's decision on the license or permit to changes in specific permit conditions.
- 5. *All the matters to be contested.* The Board will limit its consideration to those matters specifically raised in the written notice of appeal.
- 6. Request for hearing. If the appellant wishes the Board to hold a public hearing on the appeal, a request for public hearing must be filed as part of the notice of appeal, and must include an offer of proof in accordance with Chapter 2. The Board will hear the arguments in favor of and in opposition to a hearing on the appeal and the presentations on the merits of an appeal at a regularly scheduled meeting. If the Board decides to hold a public hearing on an appeal, that hearing will then be scheduled for a later date.
- 7. New or additional evidence to be offered. If an appellant wants to provide evidence not previously provided to DEP staff during the DEP's review of the application, the request and the proposed evidence must be submitted with the appeal. The Board may allow new or additional evidence, referred to as supplemental evidence, to be considered in an appeal only under very limited circumstances. The proposed evidence must be relevant and material, and (a) the person seeking to add information to the record must show due diligence in bringing the evidence to the DEP's attention at the earliest possible time in the licensing process; or (b) the evidence itself must be newly discovered and therefore unable to have been presented earlier in the process. Specific requirements for supplemental evidence are found in Chapter 2 § 24.

#### OTHER CONSIDERATIONS IN APPEALING A DECISION TO THE BOARD

- 1. Be familiar with all relevant material in the DEP record. A license application file is public information, subject to any applicable statutory exceptions, and is made easily accessible by the DEP. Upon request, the DEP will make application materials available during normal working hours, provide space to review the file, and provide an opportunity for photocopying materials. There is a charge for copies or copying services.
- 2. Be familiar with the regulations and laws under which the application was processed, and the procedural rules governing your appeal. DEP staff will provide this information on request and answer general questions regarding the appeal process.
- 3. The filing of an appeal does not operate as a stay to any decision. If a license has been granted and it has been appealed, the license normally remains in effect pending the processing of the appeal. Unless a stay of the decision is requested and granted, a license holder may proceed with a project pending the outcome of an appeal, but the license holder runs the risk of the decision being reversed or modified as a result of the appeal.

#### WHAT TO EXPECT ONCE YOU FILE A TIMELY APPEAL WITH THE BOARD

The Board will formally acknowledge receipt of an appeal, and will provide the name of the DEP project manager assigned to the specific appeal. The notice of appeal, any materials accepted by the Board Chair as supplementary evidence, any materials submitted in response to the appeal, and relevant excerpts from the DEP's application review file will be sent to Board members with a recommended decision from DEP staff. The appellant, the license holder if different from the appellant, and any interested persons are notified in advance of the date set for Board consideration of an appeal or request for public hearing. The appellant and the license holder will have an opportunity to address the Board at the Board meeting. With or without holding a public hearing, the Board may affirm, amend, or reverse a Commissioner decision or remand the matter to the Commissioner for further proceedings. The Board will notify the appellant, the license holder, and interested persons of its decision.

#### II. JUDICIAL APPEALS

Maine law generally allows aggrieved persons to appeal final Commissioner or Board licensing decisions to Maine's Superior Court (see 38 M.R.S. § 346(1); 06-096 C.M.R. ch. 2; 5 M.R.S. § 11001; and M.R. Civ. P. 80C). A party's appeal must be filed with the Superior Court within 30 days of receipt of notice of the Board's or the Commissioner's decision. For any other person, an appeal must be filed within 40 days of the date the decision was rendered. An appeal to court of a license decision regarding an expedited wind energy development, a general permit for an offshore wind energy demonstration project, or a general permit for a tidal energy demonstration project may only be taken directly to the Maine Supreme Judicial Court. See 38 M.R.S. § 346(4).

Maine's Administrative Procedure Act, DEP statutes governing a particular matter, and the Maine Rules of Civil Procedure must be consulted for the substantive and procedural details applicable to judicial appeals.

#### ADDITIONAL INFORMATION

If you have questions or need additional information on the appeal process, for administrative appeals contact the Board's Executive Analyst at (207) 287-2452, or for judicial appeals contact the court clerk's office in which your appeal will be filed.

Note: The DEP provides this INFORMATION SHEET for general guidance only; it is not intended for use as a legal reference. Maine law governs an appellant's rights.



## STATE OF MAINE DEPARTMENT OF ENVIRONMENTAL PROTECTION 17 STATE HOUSE STATION AUGUSTA, MAINE 04333-0017

#### **DEPARTMENT ORDER**

#### IN THE MATTER OF

ME. DEPT. INLAND FISH	ERIES & WILDLIFE	) MAINE POLLUTANT DISCHARGE	Ξ
GOVERNOR HILL FISH H	HATCHERY	) ELIMINATION SYSTEM PERMIT	
AUGUSTA, KENNEBEC (	COUNTY, MAINE	) AND	
ME0001091		) WASTE DISCHARGE LICENSE	
W-002034-6F-F-R	APPROVAL	) RENEWAL	

In compliance with the applicable provisions of *Pollution Control*, 38 M.R.S. §§ 411 – 424-B, *Water Classification Program*, 38 M.R.S. §§ 464 – 470 and *Federal Water Pollution Control Act*, Title 33 U.S.C. § 1251, and applicable rules of the Department of Environmental Protection (Department), the Department has considered the application of the MAINE DEPARTMENT OF INLAND FISHERIES AND WILDLIFE (DIFW), with its supportive data, agency review comments, and other related materials on file and FINDS THE FOLLOWING FACTS:

#### APPLICATION SUMMARY

On December 4, 2019, the Department of Environmental Protection (Department) accepted as complete for processing an application from DIFW for the renewal of combination Waste Discharge License (WDL) W-002034-6F-E-R/ Maine Pollutant Discharge Elimination System (MEPDES) permit ME0001091, which was issued on March 20, 2015, for a five-year term. The March 20, 2015 permit authorized a monthly average discharge of 1.2 million gallons per day (MGD) of fish hatchery wastewater from the DIFW Governor Hill Hatchery to Spring Brook, Class B, in Augusta, Maine.

#### PERMIT SUMMARY

This permitting action is carrying forward the terms and conditions of the March 20, 2015 permit except that it:

1. Establishes the use of Halamid Aqua for control of bacterial gill disease.

#### CONCLUSIONS

BASED on the findings in the attached and incorporated Fact Sheet dated April 3, 2020, and subject to the Conditions listed below, the Department makes the following CONCLUSIONS:

- 1. The discharge, either by itself or in combination with other discharges, will not lower the quality of any classified body of water below such classification.
- 2. The discharge, either by itself or in combination with other discharges, will not lower the quality of any unclassified body of water below the classification which the Department expects to adopt in accordance with State law.
- 3. The provisions of the State's antidegradation policy, *Classification of Maine waters*, 38 M.R.S. § 464(4)(F), will be met, in that:
  - (a) Existing in-stream water uses and the level of water quality necessary to protect and maintain those existing uses will be maintained and protected;
  - (b) Where high quality waters of the State constitute an outstanding national resource, that water quality will be maintained and protected;
  - (c) Where the standards of classification of the receiving waterbody are not met, the discharge will not cause or contribute to the failure of the waterbody to meet the standards of classification;
  - (d) Where the actual quality of any classified receiving waterbody exceeds the minimum standards of the next highest classification that higher water quality will be maintained and protected; and
  - (e) Where a discharge will result in lowering the existing water quality of any waterbody, the Department has made the finding, following opportunity for public participation, that this action is necessary to achieve important economic or social benefits to the State.
- 4. The discharge will be subject to effluent limitations that require application of best practicable treatment as defined in 38 M.R.S. § 414-A(1)(D).
- 5. The applicant has objectively demonstrated to the Department's satisfaction that the discharge is necessary and that there are no other reasonable alternatives available, as required by *Standards for classification of fresh surface waters*, 38 M.R.S. § 464(4)(A)(l)(a) for the direct discharge of pollutants to waters having a drainage area of less than 10 square miles.

#### ACTION

THEREFORE, the Department APPROVES the above noted application of the MAINE DEPARTMENT OF INLAND FISHERIES & WILDLIFE to discharge a monthly average of 1.2 MGD of fish hatchery wastewater via Outfall #005A to Spring Brook, Class B, in Augusta, Maine, SUBJECT TO ALL APPLICABLE STANDARDS AND REGULATIONS AND THE FOLLOWING CONDITIONS:

- 1. "Maine Pollutant Discharge Elimination System Permit Standard Conditions Applicable to All Permits," revised July 1, 2002, copy attached.
- 2. The attached Special Conditions, including any effluent limitations and monitoring requirements.
- 3. This permit becomes effective upon the date of signature below and expires at midnight five (5) years after that date. If a renewal application is timely submitted and accepted as complete for processing prior to the expiration of this permit, the terms and conditions of this permit and all subsequent modifications and minor revisions thereto remain in effect until a final Department decision on the renewal application becomes effective. [Maine Administrative Procedure Act, 5 M.R.S. § 10002 and Rules Concerning the Processing of Applications and Other Administrative Matters, 06-096 CMR 2(21)(A) (amended October 19, 2018)].

PLEASE NOTE ATTACHED SHEET FOR GUIDANCE ON APPEAL PROCEDU	IRES
DONE AND DATED AT AUGUSTA, MAINE, THIS DAY OF	2020.
DEPARTMENT OF ENVIRONMENTAL PROTECTION	
Q 2	
BY:	
For GERALD D. REID, Commissioner	

December 4, 2019

**FILED** 

April 6, 2020

State of Maine
Board of Environmental Protection

Date filed with Board of Environmental Protection

Date of initial receipt of application December 2, 2019

Date of application acceptance

This Order prepared by Breanne Blaisdell, Bureau of Water Quality

#### A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

1. The permittee is authorized to discharge **fish hatchery wastewater from Outfall #005A (fish hatchery and rearing station)** to Spring Brook. Such discharges are limited and must be monitored by the permittee as specified below<sup>(1)</sup>:

Effluent Characteristic	Discharge Limitations				Minimum Monitoring Requirements		
	Monthly Average as specified	Daily Maximum as specified	Monthly Average as specified	Daily Maximum as specified	Daily Minimum as specified	Measurement Frequency as specified	Sample Type as specified
Flow [50050]	1.2 MGD [03]					Daily [01/01]	Measure [MS]
TSS [00530]	17 lbs./day [26]	100 lbs./day [26]	6 mg/L [19]	10 mg/L [19]		1/Month [01/30]	Composite <sup>(2)</sup> [CP]
Total Phosphorus <sup>(3)</sup> (June 1 <sup>st</sup> – September 30 <sup>th</sup> ) [00665]	0.24 lbs./day [26]	Report lbs./day [26]	Report lbs./day [26]	Report lbs./day [26]		2/Month <sup>(4)</sup> [02/30]	Composite <sup>(2)</sup> [CP]
Fish on Hand [45604]		Report lbs./day [26]			-1-	1/Month [1/30]	Calculated [CA]
Formalin <sup>(5)</sup> [51064]	Report lbs./day [26]	95 lbs./day [26]				1/Occurrence [01/OC]	Calculated [CA]
Dissolved Oxygen (June 1 – September 30 <sup>th</sup> ) [00300]			Report mg/L [19]	Report mg/L [19]	7.5 mg/L [19]	1/Week [01/07]	Measured [MS]

The italicized numeric values bracketed in the table and in subsequent text are code numbers that Department personnel utilize to code the monthly Discharge Monitoring Reports.

**FOOTNOTES:** See Pages 5-6 of this permit for applicable footnote

#### A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (cont'd)

#### **Footnotes**

- 1. Sampling-All effluent monitoring must be conducted at a location following the last treatment unit in the treatment process, as to be representative of end-of-pipe effluent characteristics. Any change in sampling location must be approved by the Department in writing. The permittee must conduct sampling and analysis in accordance with; a) methods approved by 40 Code of Federal Regulations (CFR) Part 136, b) alternative methods approved by the Department in accordance with the procedures in 40 CFR Part 136, or c) as otherwise specified by the Department. Samples that are sent out for analysis must be analyzed by a laboratory certified by the State of Maine's Department of Health and Human Services for wastewater. Samples that are sent to a publicly owned treatment works (POTW) licensed pursuant to Waste discharge licenses, 38 M.R.S. § 413 are subject to the provisions and restrictions of Maine Comprehensive and Limited Environmental Laboratory Certification Rules, 10-144 CMR 263 (effective date December 19, 2018). If the permittee monitors any pollutant more frequently than required by the permit using test procedures approved under 40 CFR Part 136 or as specified in this permit, the results of this monitoring must be included in the calculation and reporting of the data submitted in the Discharge Monitoring Report (DMR).
- 2. **Composite Samples** Samples must consist of 24-hour composites collected with an automatic composite sampler. Alternatively, when weather conditions and/or equipment prevents automatic compositing and upon notification to the Department's compliance inspector, the permittee may manually composite a minimum of four grab samples collected at two-hour intervals during the working day at the facility.
- 3. **Total Phosphorus** Total phosphorus monitoring must be performed in accordance with **Attachment A** of this permit entitled, *Protocol for Total P Sample Collection and Analysis for Waste Water May*, 2014, unless otherwise specified by the Department.
- 4. **Twice per Month Monitoring:** Monitoring required at a minimum frequency of 2/month must be collected no less than 14 days between sampling events, unless specifically authorized by the Department's compliance inspector.
- 5. **Formalin** Formalin monitoring must be conducted when in use at the facility and must consist of a calculated effluent mass value. Therefore, the following calculation must be applied to assess the total mass of formalin discharged per occurrence (lbs./day):

Formalin applied (gallons)  $\times 9.03^{1}$  (lbs./gallon) = Total formalin in effluent (lbs./day)

<sup>&</sup>lt;sup>1</sup> Per Material Safety Data Sheet, Parasite-S has a specific gravity of 1.0775-1.0865 giving it an average density of 9.03 lbs./gallon.

#### A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (cont'd)

The permittee must provide this information and calculations to the Department in a document accompanying the monthly DMR. The formalin limit corresponds to two types of treatments:

- 1. One hour per day treatment typical of hatchery and rearing facility discharges; and
- 2. Maximum of up to 24 hours of treatment and discharge for addressing emergency conditions at the facility.

Formalin treatments lasting longer than 1-hour in duration must be conducted no more frequently than once every four days. The permittee must provide a list of dates on which treatments greater than 1-hour were performed, and the length of time of each such treatment, with each monthly DMR.

For instances when a permittee has not used formalin for an entire reporting period, the permittee must report "N9" for this parameter on the monthly DMR.

#### **B. NARRATIVE EFFLUENT LIMITATIONS**

- 1. The permittee must not discharge effluent that contains a visible oil sheen, foam or floating solids at any time which would impair the uses designated for the classification of the receiving waters.
- 2. The permittee must not discharge effluent that contains materials in concentrations or combinations which are hazardous or toxic to aquatic life, or which would impair the uses designated for the classification of the receiving waters.
- 3. The permittee must not discharge effluent that causes visible discoloration or turbidity in the receiving waters that causes those waters to be unsuitable for the designated uses and characteristics ascribed to their class.
- 4. The permittee must not discharge effluent that lowers the quality of any classified body of water below such classification, or lowers the existing quality of any body of water if the existing quality is higher than the classification.

#### C. AUTHORIZED DISCHARGES

The permittee is authorized to discharge only in accordance with: 1) the permittee's General Application for Waste Discharge Permit, accepted for processing on December 4, 2019; 2) the terms and conditions of this permit; and 3) only from Outfall #005A. Discharges of wastewater from any other point source(s) are not authorized under this permit, and must be reported in accordance with Standard Condition D(1)(f), *Twenty-four-hour reporting*.

#### D. NOTIFICATION REQUIREMENT

In accordance with Standard Condition D, the permittee must notify the Department of the following:

- 1. Any substantial change in the volume or character of pollutants being introduced into the wastewater collection and treatment system.
- 2. For the purposes of this section, adequate notice must include information on:
  - a. The quality and quantity of wastewater introduced to the wastewater collection and treatment system; and
  - b. Any anticipated change in the quality and quantity of the wastewater to be discharged from the treatment system.

#### E. MONITORING AND REPORTING

#### Electronic Reporting

*NPDES Electronic Reporting*, 40 C.F.R. 127, requires MEPDES permit holders to submit monitoring results obtained during the previous month on an electronic discharge monitoring report to the regulatory agency utilizing the USEPA electronic system.

Electronic Discharge Monitoring Reports (DMRs) submitted using the USEPA NetDMR system, must be:

- 1. Submitted by a facility authorized signatory; and
- 2. Submitted no later than **midnight on the 15<sup>th</sup> day of the month** following the completed reporting period.

Documentation submitted in support of the electronic DMR may be attached to the electronic DMR. Toxics reporting must be done using the DEP Toxsheet reporting form. An electronic copy of the Toxsheet reporting document must be submitted to your Department compliance inspector as an attachment to an email. In addition, a hardcopy form of this sheet must be signed and submitted to your compliance inspector, or a copy attached to your NetDMR submittal will suffice.

Documentation submitted electronically to the Department in support of the electronic DMR must be submitted no later than midnight on the 15<sup>th</sup> day of the month following the completed reporting period.

#### Non-electronic Reporting

If you have received a waiver from the Department concerning the USEPA electronic reporting rule, or are permitted to submit hardcopy DMR's to the Department, then your monitoring results obtained during the previous month must be summarized for each month

#### E. MONITORING AND REPORTING (cont'd)

and reported on separate Discharge Monitoring Report (DMR) forms provided by the Department and postmarked on or before the thirteenth (13<sup>th</sup>) day of the month or hand-delivered to a Department Regional Office such that the DMR's are received by the Department on or before the fifteenth (15<sup>th</sup>) day of the month following the completed reporting period.

Toxsheet reporting forms must be submitted electronically as an attachment to an email sent to your Department compliance inspector. In addition, a signed hardcopy of your Toxsheet must also be submitted.

A signed copy of the DMR and all other reports required herein must be submitted to the Department assigned compliance inspector (unless otherwise specified) following address:

Department of Environmental Protection Bureau of Water Quality Division of Water Quality Management State House Station 17 Augusta, Maine 04333-0017

#### F. OPERATION & MAINTENANCE PLAN

The permittee must have a current written Operation & Maintenance (O&M) Plan for the facility. The plan must provide a systematic approach by which the permittee must at all times, properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit.

An acceptable O&M plan must ensure the following items are adequately addressed:

#### 1. Solids Control

- a. Methods and practices to ensure efficient feed management and feeding strategies that limit feed input to the minimum amount reasonably necessary to achieve production goals and sustain targeted rates of aquatic animal growth in order to minimize potential discharges to waters of the State.
- b. In order to minimize the discharge of accumulated solids from the settling basin, settling tanks, and production systems, identify and implement procedures for routine cleaning of rearing units and settling tanks, and procedures to minimize any discharge of accumulated solids during the inventorying, grading, and harvesting of aquatic animals in the production system.

#### F. OPERATION & MAINTENANCE PLAN (cont'd)

c. Procedure for removal and disposal of mortalities to prevent discharge to waters of the State.

#### 2. Materials Storage

- a. Ensure proper storage of drugs<sup>2</sup>, pesticides<sup>3</sup>, feed, and any petroleum and/or hazardous waste products in a manner designed to prevent spills that may result in the discharge of drugs, pesticides, or feed to waters of the State.
- b. Implement procedures for properly containing, cleaning, and disposing of any spilled material that has the potential to enter waters of the State.

#### 3. Structural Maintenance

- a. Inspect the production system and the wastewater treatment system on a routine basis in order to identify and promptly repair any damage.
- b. Conduct regular maintenance of the production system and the wastewater treatment system in order to ensure that they are properly functioning.

#### 4. Recordkeeping

- a. Maintain records for fish rearing units documenting the feed amounts and estimates of the numbers and weight of fish.
- b. Maintain records that document the frequency of cleaning, inspections, repairs and maintenance.

#### 5. Training

- a. In order to ensure the proper clean-up and disposal of spilled material adequately, train all relevant personnel in spill prevention and how to respond in the event of a spill.
- b. Train staff on the proper operation and cleaning of production and wastewater treatment systems including training in feeding procedures and proper use of equipment to prevent unauthorized discharges.

<sup>&</sup>lt;sup>2</sup> **Drug.** "Drug" means any substance defined as a drug in section 201(g)(1) of the *Federal Food, Drug and Cosmetic Act* [21 U.S.C. § 321].

<sup>&</sup>lt;sup>3</sup> **Pesticide.** "Pesticide" means any substance defined as a "pesticide" in section 2(u) of the *Federal Insecticide*, *Fungicide, and Rodenticide Act* [7 U.S.C. § 136 (u)].

#### F. OPERATION & MAINTENANCE PLAN (cont'd)

By December 31 of each year, or within 90 days of any process changes or minor equipment upgrades, the permittee must evaluate and modify the O&M Plan including site plan(s) and schematic(s) for the wastewater treatment facility to ensure that it is up-to-date. The O&M Plan must be kept on-site at all times and made available to Department and USEPA personnel upon request.

Within 90 days of completion of new and or substantial upgrades of the wastewater treatment facility, the permittee must submit the updated O&M Plan to their Department inspector for review and comment.

#### G. USE OF DRUGS FOR DISEASE CONTROL

- 1. **General requirements.** All drugs used for disease prevention or control must be approved or authorized by the U.S. Food and Drug Administration (FDA), and all applications must comply with applicable FDA requirements.
- 2. **FDA-approved drugs.** Drugs approved by the FDA for fish culture purposes may be used in accordance with label instructions.
  - a. Preventative treatments: The discharge of any approved drug administered as a preventative measure is not authorized by this permit, unless the following conditions are met: the drug must be approved by FDA, and the treatment and route of administration must be consistent with the drug's intended use.
  - b. Drugs identified in the permittee's application: A list of drugs, pesticides and other compounds proposed for use at Maine Department of Inland Fisheries and Wildlife Governor Hill Fish Hatchery during the term of the permit, which was provided by the permittee on Form DEPLW1999-18 included with its December 4, 2019, General Application for Waste Discharge Permit, is included as **Attachment B** of this permit.

Name	Freq. of Use	Concentration	Qty. Used/Year
Parasite-S	As needed	1667 ppm for 15-minute duration 150-250 ppm for 1-hour duration	+/- 150 gal
Tricaine-S	As needed	15 - 330  ppm	< 400 grams
Halamid Aqua	As needed	12-20 ppm	< 10 lbs.

c. Drugs not identified in the permittee's application: When the need to treat or control diseases requires the use of an FDA-approved drug not identified in the application,

#### G. USE OF DRUGS FOR DISEASE CONTROL (cont'd)

or **Attachment B** of the permit, the permittee must notify the Department orally or by electronic mail prior to initial use of the drug.

- 1. The notification must include a description of the drug, its intended purpose, the method of application, the amount, the concentration, the duration of the use, and information on aquatic toxicity.
- 2. Within seven (7) days of the initial notification the permittee must submit a written report that includes all of the information outlined in Section G.2.c(1) above.
- 3. The Department may require submission of an application for permit modification, including public notice requirements, if the drug is to be used for more than a 30-consecutive day period.
- 4. If, upon review of information regarding the extralabel use of a drug pursuant to this section, the Department determines that significant adverse effects are likely to occur, it may deny, restrict or limit use of the drug.
- 3. **Extralabel drug use.** Extralabel drug use is not authorized by this permit, unless in accordance with a specific prescription written for that use by a licensed veterinarian.
  - a. Notification. The permittee must notify the Department orally or by e-mail prior to initial extralabel use of a drug.
    - 1. The notification must include a description of the drug, its intended purpose, the method of application, the amount, concentration, and duration of the use, information on aquatic toxicity, and a description of how and why the use qualifies as an extralabel drug use under FDA requirements.
    - 2. Within seven (7) days of the initial notification the permittee must submit a written report that includes all of the information outlined in Section G.3.a(1) above. Notice must include documentation that a veterinarian has prescribed the drug for the proposed use. A copy of the veterinarian's prescription must be maintained on-site during treatment for Department review.
    - 3. If, upon review of information regarding the extralabel use of a drug pursuant to this section, the Department determines that significant adverse effects are likely to occur, it may deny, restrict or limit use of the drug.
- 4. **Investigational New Animal Drug (INAD).** The discharge of drugs authorized by the FDA for use during studies conducted under the INAD program is not authorized by this permit, unless in accordance with specific prior consent given in writing by the Department.

#### G. USE OF DRUGS FOR DISEASE CONTROL (cont'd)

- a. Initial report. The permittee must provide a written report to the Department for the proposed use of an INAD within seven (7) days of agreeing or signing up to participate in an INAD study. The written report must identify the INAD to be used, method of use, dosage, and disease or condition the INAD is intended to treat.
- b. Evaluation and monitoring. *At least ninety (90) days prior to <u>initial use</u> of an INAD at a facility, the permittee must submit for Department review and approval a study plan for the use of the drug that:* 
  - 1. Indicates the date the facility agreed or signed up to participate in the INAD study.
  - 2. Demonstrates that the minimum amount of drug necessary to evaluate its safety, efficacy, and possible environmental impacts will be used.
  - 3. Includes an environmental monitoring and evaluation program that at a minimum describes sampling strategies, analytical procedures, evaluation techniques and a timetable for completion of the program. Currently available data or literature that adequately characterizes the environmental fate of the INAD and its metabolite(s) may be proposed for consideration in determinations of environmental monitoring and evaluation programs required by the Department pursuant to this section.
- c. Notification. The permittee must notify the Department orally or by electronic mail *no more than forty-eight (48) hours after* beginning the first use of the INAD under the approved plan.
- d. The following INAD was identified by the permittee and is authorized to be used in accordance with the INAD program:

Name	Freq. of Use	Concentration	Qty. Used/Year
Aqui-S 20 E	As needed	25-40 ppm	< 1 Liter

#### H. PESTICIDES AND OTHER COMPOUNDS

1. General requirements. All pesticides used at the facility must be applied in compliance with federal labeling restrictions and in compliance with applicable statute, Board of Pesticides Control rules and best management practices (BMPs). Chemicals or compounds not registered as pesticides and proposed for use at the facility must be identified in the permittee's application and may only be discharged to waters of the State with express approval in this permitting action. In accordance with Special Condition D of this permit, the permittee must notify the Department of any substantial change in the volume or character of pollutants being introduced into the wastewater collection and treatment system.

### W002034-6F-F-R

#### SPECIAL CONDITIONS

#### H. PESTICIDES AND OTHER COMPOUNDS(cont'd)

a. Pesticides identified in the permittee's application. The following pesticides were identified in the permittee's application as currently being or potentially being in use:

Name	Freq. of Use	Concentration	Qty. Used/Year
Virkon Aquatic	As needed	1.3 oz/gal H <sub>2</sub> 0	+/- 10 lbs.

b. Other compounds identified in the permittee's application. The following compounds were identified in the permittee's application as currently being or potentially being in use. The permittee is authorized to discharge the following compounds. It is the Department's Best Professional Judgment (BPJ) that the incidental discharge of these chemicals will not cause or contribute to non-attainment of applicable water quality standards.

Name	Freq. of Use	Concentration	Qty. Used/Year
Argentyne or Ovadine	As needed	100 ppm	+/- 4 gallons
Sodium Chloride blocks or crystals		1-2%	< 2000 lbs.

#### I. SPILLS

In the event of a spill of drugs, pesticides, feed, petroleum and/or hazardous waste products that results in a discharge to waters of the State, the permittee must provide an oral report of the spill to the Department within 24 hours of its occurrence and a written report within 5 days to the Department. The report must include the identity and quantity of the material spilled.

#### J. PROTECTION OF ATLANTIC SALMON

The permittee is required to employ a fully functional Containment Management System (CMS) designed, constructed, operated, and audited so as to prevent the accidental or consequential escape of fish from the facility.

Each CMS plan must include:

- 1. a site plan or schematic;
- 2. site plan description;
- 3. procedures for inventory control, predator control, escape response; unusual event management, and severe weather;
- 4. provisions for employee training, auditing methods, and record keeping requirements; and

#### J. PROTECTION OF ATLANTIC SALMON (cont'd)

5. the CMS must identify critical control points where escapes could potentially occur, specific control mechanisms for each of these points, and monitoring procedures to verify the effectiveness of controls.

The CMS site specific plan must also describe the use of effective containment barriers appropriate to the life history of the fish. The facility must have in place both a three-barrier system for fish up to 5 grams in size and a two-barrier system for fish 5 grams in size or larger.

The three-barrier system must include one barrier at the incubation/rearing unit, one barrier at the effluent from the hatch house/fry rearing area and a third barrier placed in line with the entire effluent from the facility. Each barrier must be appropriate to the size of fish being contained. The two-barrier system must include one barrier at the individual rearing unit drain and one barrier in line with the total effluent from the facility. Each barrier must be appropriate to the size of fish being contained. Barriers installed in the system may be of the screen type or some other similarly effective device used to contain fish of a specific size in a designated area. Barriers installed in the system for compliance with these requirements must be monitored daily.

Facility personnel responsible for routine operation must be properly trained and qualified to implement the CMS. Prior to any containment system assessment associated with this permit, the permittee must provide to the Department documentation of the employee's or contractor's demonstrated capabilities to conduct such work [ICIS code 21599].

The permittee must submit the CMS plan to the Department for review and approval on or before six months following the effective date of this permit [ICIS code 53799] and must maintain a current copy of the plan at the facility.

The CMS must be audited at least once per year and within 30 days of a reportable escape (a reportable escape is more than 50 fish) by a third party qualified to conduct CMS audits and approved by the Department [ICIS code 63899]. A written report of these audits must be provided to the facility and the Department for review and approval within 30 days of the audit being conducted [ICIS code 43699]. Any time that a CMS audit identifies deficiencies, the written report must contain a corrective action plan including a timetable for implementation and provisions for re-auditing, unless waived by the Department, to verify completion of all corrective actions.

Additional third party audits to verify correction of deficiencies must be conducted in accordance with the corrective action plan or upon request of the Department. The facility must notify the Department upon completion of corrective actions.

#### J. PROTECTION OF ATLANTIC SALMON (cont'd)

The permittee must maintain for a period of at least five (5) years complete records, logs, reports of internal and third-party audits and documents related to the CMS for each facility.

**Escape reporting.** The permittee must notify by electronic mail (e-mail) the <u>Escape Reporting Contact List</u> (provided below, in this subsection) of any known or suspected escape of more than 50 fish within 24 hours of becoming aware of the known or suspected loss to the following persons listed under "Escape Reporting Contact List."

The permittee must include in its e-mail notification the following information: 1) site location (town and waterbody); 2) date of event (or window of possible dates if exact date is unknown); 3) time of event (if known or specify "unknown"); 4) species (including strain); 5) estimated average weight; 6) age of escaped fish; 7) number of escaped fish (or if exact number is not possible, an estimate); 8) medication profile; 9) details of the escape; 10) corrective action(s) taken or planned; 11) and a contact person (including phone number) for the facility which is subject of the known or suspected escape.

#### **Escape Reporting Contact List:**

The agency contacts on this list may be revised by the state and/or federal agencies by provision of written notification to the permittee and the other agencies. Upon notice of any such change the permittee must notify all persons on the revised list in the same manner as provided in this protocol.

Army Corps of Engineers

Maine Project Office; Jay Clement; Jay.L.Clement@usace.army.mil

Maine Department of Environmental Protection

Commissioner, Gerald D. Reid; Jerry.Reid@maine.gov, or current Commissioner

Maine Department Marine Resources

Secretary to the Commissioner, Amy Sinclair; Amy.Sinclair@maine.gov

Sea-Run Fisheries and Habitat Division Director, Sean Ledwin; Sean.M.Ledwin@maine.gov

Maine Department of Inland Fisheries and Wildlife

Commissioner, Judy Camuso: Judy.Camuso@maine.gov, or current Commissioner

National Marine Fisheries Service

Maine Field Station; David Bean, David.bean@noaa.gov

United States Fish & Wildlife Service

Maine Field Office; Anna Harris; Anna\_Harris@fws.gov

W002034-6F-F-R

#### SPECIAL CONDITIONS

#### K. REOPENING OF PERMIT FOR MODIFICATION

In accordance with 38 M.R.S. § 414-A(5) and upon evaluation of the tests results in the Special Conditions of this permitting action, new site specific information, or any other pertinent test results or information obtained during the term of this permit, the Department may, at any time and with notice to the permittee, modify this permit to: (1) include effluent limits necessary to control specific pollutants or whole effluent toxicity where there is a reasonable potential that the effluent may cause water quality criteria to be exceeded; (2) require additional monitoring if results on file are inconclusive; or (3) change monitoring requirements or limitations based on new information.

#### L. SEVERABILITY

In the event that any provision or part thereof, of this permit is declared to be unlawful by a reviewing court, the remainder of the permit must remain in full force and effect, and must be construed and enforced in all aspects as if such unlawful provision, or part thereof, had been omitted, unless otherwise ordered by the court.

# MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

#### **CONTENTS**

SECTION	TOPIC	PAGE
A	GENERAL PROVISIONS	
1	General compliance	2
2	-	2
3	Duty to Comply	2
۷	Duty to provide information	2
5	Permit actions	2
(	Reopener clause	2
7		2
{	1	3
Ò	•	3
10		3
11		3
12	Inspection and entry	3
В	OPERATION AND MAINTENANCE OF FACILITIES	
1	General facility requirements	3
2	1 1	4
3		4
۷	,	4
-	V 1	4
6	Upsets	5
C	MONITORING AND RECORDS	
1	General requirements	6
2	1 0	6
3	Monitoring and records	6
D	REPORTING REQUIREMENTS	
1	Reporting requirements	7
2	Signatory requirement	8
3	Availability of reports	8
۷	Existing manufacturing, commercial, mining, and silvicultural dischargers	8
5	Publicly owned treatment works	9
E	OTHER PROVISIONS	
1		9
2	1 1	10
3		10
۷	Connection to municipal sewer	10
F	DEFINTIONS	10

-----

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

#### A. GENERAL PROVISIONS

- 1. **General compliance**. All discharges shall be consistent with the terms and conditions of this permit; any changes in production capacity or process modifications which result in changes in the quantity or the characteristics of the discharge must be authorized by an additional license or by modifications of this permit; it shall be a violation of the terms and conditions of this permit to discharge any pollutant not identified and authorized herein or to discharge in excess of the rates or quantities authorized herein or to violate any other conditions of this permit.
- **2. Other materials.** Other materials ordinarily produced or used in the operation of this facility, which have been specifically identified in the application, may be discharged at the maximum frequency and maximum level identified in the application, provided:
  - (a) They are not
    - (i) Designated as toxic or hazardous under the provisions of Sections 307 and 311, respectively, of the Federal Water Pollution Control Act; Title 38, Section 420, Maine Revised Statutes; or other applicable State Law; or
    - (ii) Known to be hazardous or toxic by the licensee.
  - (b) The discharge of such materials will not violate applicable water quality standards.
- **3. Duty to comply.** The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of State law and the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.
  - (a) The permittee shall comply with effluent standards or prohibitions established under section 307(a) of the Clean Water Act, and 38 MRSA, §420 or Chapter 530.5 for toxic pollutants within the time provided in the regulations that establish these standards or prohibitions, even if the permit has not yet been modified to incorporate the requirement.
  - (b) Any person who violates any provision of the laws administered by the Department, including without limitation, a violation of the terms of any order, rule license, permit, approval or decision of the Board or Commissioner is subject to the penalties set forth in 38 MRSA, §349.
- **4. Duty to provide information.** The permittee shall furnish to the Department, within a reasonable time, any information which the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The permittee shall also furnish to the Department upon request, copies of records required to be kept by this permit.
- **5. Permit actions.** This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.
- **6. Reopener clause**. The Department reserves the right to make appropriate revisions to this permit in order to establish any appropriate effluent limitations, schedule of compliance or other provisions which may be authorized under 38 MRSA, §414-A(5).

...........

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

- **7. Oil and hazardous substances.** Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities or penalties to which the permittee is or may be subject under section 311 of the Federal Clean Water Act; section 106 of the Federal Comprehensive Environmental Response, Compensation and Liability Act of 1980; or 38 MRSA §§ 1301, et. seq.
- **8.** Property rights. This permit does not convey any property rights of any sort, or any exclusive privilege.
- 9. Confidentiality of records. 38 MRSA §414(6) reads as follows. "Any records, reports or information obtained under this subchapter is available to the public, except that upon a showing satisfactory to the department by any person that any records, reports or information, or particular part or any record, report or information, other than the names and addresses of applicants, license applications, licenses, and effluent data, to which the department has access under this subchapter would, if made public, divulge methods or processes that are entitled to protection as trade secrets, these records, reports or information must be confidential and not available for public inspection or examination. Any records, reports or information may be disclosed to employees or authorized representatives of the State or the United States concerned with carrying out this subchapter or any applicable federal law, and to any party to a hearing held under this section on terms the commissioner may prescribe in order to protect these confidential records, reports and information, as long as this disclosure is material and relevant to any issue under consideration by the department."
- **10. Duty to reapply.** If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must apply for and obtain a new permit.
- 11. Other laws. The issuance of this permit does not authorize any injury to persons or property or invasion of other property rights, nor does it relieve the permittee if its obligation to comply with other applicable Federal, State or local laws and regulations.
- **12. Inspection and entry**. The permittee shall allow the Department, or an authorized representative (including an authorized contractor acting as a representative of the EPA Administrator), upon presentation of credentials and other documents as may be required by law, to:
  - (a) Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
  - (b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
  - (c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
  - (d) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location.

#### B. OPERATION AND MAINTENACE OF FACILITIES

#### 1. General facility requirements.

(a) The permittee shall collect all waste flows designated by the Department as requiring treatment and discharge them into an approved waste treatment facility in such a manner as to

...........

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

maximize removal of pollutants unless authorization to the contrary is obtained from the Department.

- (b) The permittee shall at all times maintain in good working order and operate at maximum efficiency all waste water collection, treatment and/or control facilities.
- (c) All necessary waste treatment facilities will be installed and operational prior to the discharge of any wastewaters.
- (d) Final plans and specifications must be submitted to the Department for review prior to the construction or modification of any treatment facilities.
- (e) The permittee shall install flow measuring facilities of a design approved by the Department.
- (f) The permittee must provide an outfall of a design approved by the Department which is placed in the receiving waters in such a manner that the maximum mixing and dispersion of the wastewaters will be achieved as rapidly as possible.
- **2. Proper operation and maintenance.** The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit.
- **3.** Need to halt or reduce activity not a defense. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
- **4. Duty to mitigate.** The permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.

#### 5. Bypasses.

- (a) Definitions.
  - (i) Bypass means the intentional diversion of waste streams from any portion of a treatment facility.
  - (ii) Severe property damage means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.
- (b) Bypass not exceeding limitations. The permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to the provisions of paragraphs (c) and (d) of this section.
- (c) Notice.
  - (i) Anticipated bypass. If the permittee knows in advance of the need for a bypass, it shall submit prior notice, if possible at least ten days before the date of the bypass.

.....

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

(ii) Unanticipated bypass. The permittee shall submit notice of an unanticipated bypass as required in paragraph D(1)(f), below. (24-hour notice).

#### (d) Prohibition of bypass.

- (i) Bypass is prohibited, and the Department may take enforcement action against a permittee for bypass, unless:
  - (A) Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
  - (B) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; and
  - (C) The permittee submitted notices as required under paragraph (c) of this section.
- (ii) The Department may approve an anticipated bypass, after considering its adverse effects, if the Department determines that it will meet the three conditions listed above in paragraph (d)(i) of this section.

#### 6. Upsets.

- (a) Definition. Upset means an exceptional incident in which there is unintentional and temporary noncompliance with technology based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
- (b) Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology based permit effluent limitations if the requirements of paragraph (c) of this section are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
- (c) Conditions necessary for a demonstration of upset. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:
  - (i) An upset occurred and that the permittee can identify the cause(s) of the upset;
  - (ii) The permitted facility was at the time being properly operated; and
  - (iii) The permittee submitted notice of the upset as required in paragraph D(1)(f), below. (24 hour notice).
  - (iv) The permittee complied with any remedial measures required under paragraph B(4).
- (d) Burden of proof. In any enforcement proceeding the permittee seeking to establish the occurrence of an upset has the burden of proof.

......

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

\_\_\_\_\_\_

#### C. MONITORING AND RECORDS

- 1. General Requirements. This permit shall be subject to such monitoring requirements as may be reasonably required by the Department including the installation, use and maintenance of monitoring equipment or methods (including, where appropriate, biological monitoring methods). The permittee shall provide the Department with periodic reports on the proper Department reporting form of monitoring results obtained pursuant to the monitoring requirements contained herein.
- 2. Representative sampling. Samples and measurements taken as required herein shall be representative of the volume and nature of the monitored discharge. If effluent limitations are based wholly or partially on quantities of a product processed, the permittee shall ensure samples are representative of times when production is taking place. Where discharge monitoring is required when production is less than 50%, the resulting data shall be reported as a daily measurement but not included in computation of averages, unless specifically authorized by the Department.

#### 3. Monitoring and records.

- (a) Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.
- (b) Except for records of monitoring information required by this permit related to the permittee's sewage sludge use and disposal activities, which shall be retained for a period of at least five years, the permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least 3 years from the date of the sample, measurement, report or application. This period may be extended by request of the Department at any time.
- (c) Records of monitoring information shall include:
  - (i) The date, exact place, and time of sampling or measurements;
  - (ii) The individual(s) who performed the sampling or measurements;
  - (iii) The date(s) analyses were performed;
  - (iv) The individual(s) who performed the analyses;
  - (v) The analytical techniques or methods used; and
  - (vi) The results of such analyses.
- (d) Monitoring results must be conducted according to test procedures approved under 40 CFR part 136, unless other test procedures have been specified in the permit.
- (e) State law provides that any person who tampers with or renders inaccurate any monitoring devices or method required by any provision of law, or any order, rule license, permit approval or decision is subject to the penalties set forth in 38 MRSA, §349.

\_\_\_\_\_\_

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

### D. REPORTING REQUIREMENTS

#### 1. Reporting requirements.

- (a) Planned changes. The permittee shall give notice to the Department as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required only when:
  - (i) The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 CFR 122.29(b); or
  - (ii) The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements under Section D(4).
  - (iii) The alteration or addition results in a significant change in the permittee's sludge use or disposal practices, and such alteration, addition, or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan;
- (b) Anticipated noncompliance. The permittee shall give advance notice to the Department of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.
- (c) Transfers. This permit is not transferable to any person except upon application to and approval of the Department pursuant to 38 MRSA, § 344 and Chapters 2 and 522.
- (d) Monitoring reports. Monitoring results shall be reported at the intervals specified elsewhere in this permit.
  - (i) Monitoring results must be reported on a Discharge Monitoring Report (DMR) or forms provided or specified by the Department for reporting results of monitoring of sludge use or disposal practices.
  - (ii) If the permittee monitors any pollutant more frequently than required by the permit using test procedures approved under 40 CFR part 136 or as specified in the permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the DMR or sludge reporting form specified by the Department.
  - (iii) Calculations for all limitations which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified by the Department in the permit.
- (e) Compliance schedules. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than 14 days following each schedule date.
- (f) Twenty-four hour reporting.
  - (i) The permittee shall report any noncompliance which may endanger health or the environment. Any information shall be provided orally within 24 hours from the time the permittee becomes aware of the circumstances. A written submission shall also be provided within 5 days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance

\_\_\_\_\_\_

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

- (ii) The following shall be included as information which must be reported within 24 hours under this paragraph.
  - (A) Any unanticipated bypass which exceeds any effluent limitation in the permit.
  - (B) Any upset which exceeds any effluent limitation in the permit.
  - (C) Violation of a maximum daily discharge limitation for any of the pollutants listed by the Department in the permit to be reported within 24 hours.
- (iii) The Department may waive the written report on a case-by-case basis for reports under paragraph (f)(ii) of this section if the oral report has been received within 24 hours.
- (g) Other noncompliance. The permittee shall report all instances of noncompliance not reported under paragraphs (d), (e), and (f) of this section, at the time monitoring reports are submitted. The reports shall contain the information listed in paragraph (f) of this section.
- (h) Other information. Where the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Department, it shall promptly submit such facts or information.
- **2. Signatory requirement**. All applications, reports, or information submitted to the Department shall be signed and certified as required by Chapter 521, Section 5 of the Department's rules. State law provides that any person who knowingly makes any false statement, representation or certification in any application, record, report, plan or other document filed or required to be maintained by any order, rule, permit, approval or decision of the Board or Commissioner is subject to the penalties set forth in 38 MRSA, §349.
- **3.** Availability of reports. Except for data determined to be confidential under A(9), above, all reports prepared in accordance with the terms of this permit shall be available for public inspection at the offices of the Department. As required by State law, effluent data shall not be considered confidential. Knowingly making any false statement on any such report may result in the imposition of criminal sanctions as provided by law.
- **4.** Existing manufacturing, commercial, mining, and silvicultural dischargers. In addition to the reporting requirements under this Section, all existing manufacturing, commercial, mining, and silvicultural dischargers must notify the Department as soon as they know or have reason to believe:
  - (a) That any activity has occurred or will occur which would result in the discharge, on a routine or frequent basis, of any toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following "notification levels":
    - (i) One hundred micrograms per liter (100 ug/l);
    - (ii) Two hundred micrograms per liter (200 ug/l) for acrolein and acrylonitrile; five hundred micrograms per liter (500 ug/l) for 2,4-dinitrophenol and for 2-methyl-4,6-dinitrophenol; and one milligram per liter (1 mg/l) for antimony;
    - (iii) Five (5) times the maximum concentration value reported for that pollutant in the permit application in accordance with Chapter 521 Section 4(g)(7); or
    - (iv) The level established by the Department in accordance with Chapter 523 Section 5(f).

.....

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

- (b) That any activity has occurred or will occur which would result in any discharge, on a non-routine or infrequent basis, of a toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following ``notification levels":
  - (i) Five hundred micrograms per liter (500 ug/l);
  - (ii) One milligram per liter (1 mg/l) for antimony;
  - (iii) Ten (10) times the maximum concentration value reported for that pollutant in the permit application in accordance with Chapter 521 Section 4(g)(7); or
  - (iv) The level established by the Department in accordance with Chapter 523 Section 5(f).

#### 5. Publicly owned treatment works.

- (a) All POTWs must provide adequate notice to the Department of the following:
  - (i) Any new introduction of pollutants into the POTW from an indirect discharger which would be subject to section 301 or 306 of CWA or Chapter 528 if it were directly discharging those pollutants.
  - (ii) Any substantial change in the volume or character of pollutants being introduced into that POTW by a source introducing pollutants into the POTW at the time of issuance of the permit.
  - (iii) For purposes of this paragraph, adequate notice shall include information on (A) the quality and quantity of effluent introduced into the POTW, and (B) any anticipated impact of the change on the quantity or quality of effluent to be discharged from the POTW.
- (b) When the effluent discharged by a POTW for a period of three consecutive months exceeds 80 percent of the permitted flow, the permittee shall submit to the Department a projection of loadings up to the time when the design capacity of the treatment facility will be reached, and a program for maintaining satisfactory treatment levels consistent with approved water quality management plans.

#### E. OTHER REQUIREMENTS

- **1. Emergency action power failure.** Within thirty days after the effective date of this permit, the permittee shall notify the Department of facilities and plans to be used in the event the primary source of power to its wastewater pumping and treatment facilities fails as follows.
  - (a) For municipal sources. During power failure, all wastewaters which are normally treated shall receive a minimum of primary treatment and disinfection. Unless otherwise approved, alternate power supplies shall be provided for pumping stations and treatment facilities. Alternate power supplies shall be on-site generating units or an outside power source which is separate and independent from sources used for normal operation of the wastewater facilities.
  - (b) For industrial and commercial sources. The permittee shall either maintain an alternative power source sufficient to operate the wastewater pumping and treatment facilities or halt, reduce or otherwise control production and or all discharges upon reduction or loss of power to the wastewater pumping or treatment facilities.

.....

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

- **2. Spill prevention.** (applicable only to industrial sources) Within six months of the effective date of this permit, the permittee shall submit to the Department for review and approval, with or without conditions, a spill prevention plan. The plan shall delineate methods and measures to be taken to prevent and or contain any spills of pulp, chemicals, oils or other contaminates and shall specify means of disposal and or treatment to be used.
- 3. **Removed substances.** Solids, sludges trash rack cleanings, filter backwash, or other pollutants removed from or resulting from the treatment or control of waste waters shall be disposed of in a manner approved by the Department.
- 4. **Connection to municipal sewer.** (applicable only to industrial and commercial sources) All wastewaters designated by the Department as treatable in a municipal treatment system will be cosigned to that system when it is available. This permit will expire 90 days after the municipal treatment facility becomes available, unless this time is extended by the Department in writing.
- **F. DEFINITIONS.** For the purposes of this permit, the following definitions shall apply. Other definitions applicable to this permit may be found in Chapters 520 through 529 of the Department's rules

**Average** means the arithmetic mean of values taken at the frequency required for each parameter over the specified period. For bacteria, the average shall be the geometric mean.

Average monthly discharge limitation means the highest allowable average of daily discharges over a calendar month, calculated as the sum of all daily discharges measured during a calendar month divided by the number of daily discharges measured during that month. Except, however, bacteriological tests may be calculated as a geometric mean.

Average weekly discharge limitation means the highest allowable average of daily discharges over a calendar week, calculated as the sum of all daily discharges measured during a calendar week divided by the number of daily discharges measured during that week.

**Best management practices ("BMPs")** means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of waters of the State. BMPs also include treatment requirements, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

**Composite sample** means a sample consisting of a minimum of eight grab samples collected at equal intervals during a 24 hour period (or a lesser period as specified in the section on monitoring and reporting) and combined proportional to the flow over that same time period.

**Continuous discharge** means a discharge which occurs without interruption throughout the operating hours of the facility, except for infrequent shutdowns for maintenance, process changes, or other similar activities.

**Daily discharge** means the discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in units of mass, the daily discharge is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the daily discharge is calculated as the average measurement of the pollutant over the day.

------

#### STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

**Discharge Monitoring Report** ("**DMR**") means the EPA uniform national form, including any subsequent additions, revisions, or modifications for the reporting of self-monitoring results by permittees. DMRs must be used by approved States as well as by EPA. EPA will supply DMRs to any approved State upon request. The EPA national forms may be modified to substitute the State Agency name, address, logo, and other similar information, as appropriate, in place of EPA's.

**Flow weighted composite sample** means a composite sample consisting of a mixture of aliquots collected at a constant time interval, where the volume of each aliquot is proportional to the flow rate of the discharge.

**Grab sample** means an individual sample collected in a period of less than 15 minutes.

**Interference** means a Discharge which, alone or in conjunction with a discharge or discharges from other sources, both:

- (1) Inhibits or disrupts the POTW, its treatment processes or operations, or its sludge processes, use or disposal; and
- (2) Therefore is a cause of a violation of any requirement of the POTW's NPDES permit (including an increase in the magnitude or duration of a violation) or of the prevention of sewage sludge use or disposal in compliance with the following statutory provisions and regulations or permits issued thereunder (or more stringent State or local regulations): Section 405 of the Clean Water Act, the Solid Waste Disposal Act (SWDA) (including title II, more commonly referred to as the Resource Conservation and Recovery Act (RCRA), and including State regulations contained in any State sludge management plan prepared pursuant to subtitle D of the SWDA), the Clean Air Act, the Toxic Substances Control Act, and the Marine Protection, Research and Sanctuaries Act.

**Maximum daily discharge limitation** means the highest allowable daily discharge.

**New source** means any building, structure, facility, or installation from which there is or may be a discharge of pollutants, the construction of which commenced:

- (a) After promulgation of standards of performance under section 306 of CWA which are applicable to such source, or
- (b) After proposal of standards of performance in accordance with section 306 of CWA which are applicable to such source, but only if the standards are promulgated in accordance with section 306 within 120 days of their proposal.

**Pass through** means a discharge which exits the POTW into waters of the State in quantities or concentrations which, alone or in conjunction with a discharge or discharges from other sources, is a cause of a violation of any requirement of the POTW's NPDES permit (including an increase in the magnitude or duration of a violation).

**Permit** means an authorization, license, or equivalent control document issued by EPA or an approved State to implement the requirements of 40 CFR parts 122, 123 and 124. Permit includes an NPDES general permit (Chapter 529). Permit does not include any permit which has not yet been the subject of final agency action, such as a draft permit or a proposed permit.

**Person** means an individual, firm, corporation, municipality, quasi-municipal corporation, state agency, federal agency or other legal entity.

# MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

-----

**Point source** means any discernible, confined and discrete conveyance, including, but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation or vessel or other floating craft, from which pollutants are or may be discharged.

**Pollutant** means dredged spoil, solid waste, junk, incinerator residue, sewage, refuse, effluent, garbage, sewage sludge, munitions, chemicals, biological or radiological materials, oil, petroleum products or byproducts, heat, wrecked or discarded equipment, rock, sand, dirt and industrial, municipal, domestic, commercial or agricultural wastes of any kind.

**Process wastewater** means any water which, during manufacturing or processing, comes into direct contact with or results from the production or use of any raw material, intermediate product, finished product, byproduct, or waste product.

**Publicly owned treatment works** ("**POTW**") means any facility for the treatment of pollutants owned by the State or any political subdivision thereof, any municipality, district, quasi-municipal corporation or other public entity.

**Septage** means, for the purposes of this permit, any waste, refuse, effluent sludge or other material removed from a septic tank, cesspool, vault privy or similar source which concentrates wastes or to which chemicals have been added. Septage does not include wastes from a holding tank.

**Time weighted composite** means a composite sample consisting of a mixture of equal volume aliquots collected over a constant time interval.

Toxic pollutant includes any pollutant listed as toxic under section 307(a)(1) or, in the case of sludge use or disposal practices, any pollutant identified in regulations implementing section 405(d) of the CWA. Toxic pollutant also includes those substances or combination of substances, including disease causing agents, which after discharge or upon exposure, ingestion, inhalation or assimilation into any organism, including humans either directly through the environment or indirectly through ingestion through food chains, will, on the basis of information available to the board either alone or in combination with other substances already in the receiving waters or the discharge, cause death, disease, abnormalities, cancer, genetic mutations, physiological malfunctions, including malfunctions in reproduction, or physical deformations in such organism or their offspring.

**Wetlands** means those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas.

Whole effluent toxicity means the aggregate toxic effect of an effluent measured directly by a toxicity test.

## **ATTACHMENT A**

## Protocol for Total Phosphorus Sample Collection and Analysis for Waste Water and Receiving Water Monitoring Required by Permits

Approved Analytical Methods: EPA 200.7 (Rev. 44), 365.1 (Rev. 2.0), (Lachat), 365.3, 365.4; SM 3120 B, 4500-P B.5, 4500-P E, 4500-P F, 4500-P G, 4500-P H; ASTM D515-88(A), D515-88(B); USGS I-4471-97, I-4600-85, I-4610-91; OMAAOAC 973.55, 973.56

Sample Collection: The Maine DEP is requesting that total phosphorus analysis be conducted on composite effluent samples, unless a facility's Permit specifically designates grab sampling for this parameter. Facilities can use individual collection bottles or a single jug made out of glass or polyethylene. Bottles and/or jugs should be cleaned prior to each use with dilute HCL. This cleaning should be followed by several rinses with distilled water. Commercially purchased, pre-cleaned sample containers are an acceptable alternative. The sampler hoses should be cleaned, as needed.

Sample Preservation: During compositing the sample must be at 0-6 degrees C (without freezing). If the sample is being sent to a commercial laboratory or analysis cannot be performed the day of collection then the sample must be preserved using  $H_2SO_4$  to obtain a sample pH of <2 su and refrigerated at 0-6 degrees C (without freezing). The holding time for a preserved sample is 28 days.

Note: Ideally, Total P samples are preserved as described above. However, if a facility is using a commercial laboratory then that laboratory may choose to add acid to the sample once it arrives at the laboratory. The Maine DEP will accept results that use either of these preservation methods.

Laboratory QA/QC: Laboratories must follow the appropriate QA/QC procedures that are described in each of the approved methods.

Sampling QA/QC: If a composite sample is being collected using an automated sampler, then once per month run a blank on the composite sampler. Automatically, draw distilled water into the sample jug using the sample collection line. Let this water set in the jug for 24 hours and then analyze for total phosphorus. Preserve this sample as described above.

## **ATTACHMENT B**

#### Governor Hill Hatchery Disinfectants/Drugs/Theraputic Agents

MEPDES #: ME0001091

#### DISINFECTANTS:

PRODUCT NAME	INGREDIENTS	FREQ. OF USE	CONCENTRATION	TOTAL USED/YR
Virkon Aquatic	Potassium peroxymonosulfate	As needed for disinfection of nets, utensils, boots, stocking trucks, etc.	1% solution (1.3 oz/gal H2O)	+/- 10 lbs
Argentyne or Ovadine	Polymeric-lodine Complex—10% Inert Ingredients90% Available iodine1%	As needed for disinfection of eggs, nets, utensils, boots, stocking trucks, etc.	100 ppm ; (37.8 ml/gal H2O)	+/- 4gal
DRUGS/THERAPEUTIC AGENTS:				
PRODUCT NAME	INGREDIENTS	FREQ. OF USE	CONCENTRATION	TOTAL USED/YR
Parasite-S / Formalin	Formaldehyde	As needed for fungus control on eggs or fish and parasite control on fish.	1667 ppm 15 min duration 150-250 mg/l 1 hr duration	+/- 150 gals
Tricaine-S (MS 222)	Tricaine methanesulfonate	As needed for anestheizing fish during sampling, fish health/ quality exams, fish marking, etc.	15 to 330 mg/l	< 400 grams
Aqui-S 20 E	10% Eugenol	Same as MS 222, but added in anticipation of FDA approval will take place soon after use.	25- 40 mg/l	Annual anticipated use = 0 Potential use < 1 liter
Sodium Chloride blocks or crystals	NaCl	As needed as a fish stress reduction/osmoregulatory aid post handling/post parasitization	1 - 2%	<2000 lbs
Halamid Aqua	Chloramine-T	Control of bacterial gill disease Used in hatchery for fry	12-20 mg/l Limit of 400.9 grams per day Limit of 24.6 grams/hour	Annual anticipated use = 0 Potential use < 10 lbs Results in max effluent conc of 0.13 mg/l. Based on effluent of 1.2 MGD

## MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT AND WASTE DISCHARGE LICENSE

#### **FACT SHEET**

DATE: **APRIL 3, 2020** 

MEPDES PERMIT: ME0001091

WASTE DISCHARGE LICENSE: W002034-6F-F-R

NAME AND ADDRESS OF APPLICANT: MAINE DEPARTMENT OF INLAND

FISHERIES AND WILDLIFE

284 STATE STREET, 41 STATE HOUSE

**STATION** 

**AUGUSTA, MAINE 04333** 

COUNTY: KENNEBEC

NAME AND ADDRESS WHERE DISCHARGE OCCURS:

MAINE DEPARTMENT OF

INLAND FISHERIES &WILDLIFE GOVERNOR HILL HATCHERY

82 HATCHERY ROAD

**AUGUSTA, MAINE 04330** 

RECEIVING WATER / CLASSIFICATION: SPRING BROOK RIVER, CLASS B

COGNIZANT OFFICIAL AND TELEPHONE NUMBER:

**TODD LANGEVIN** 

Todd.Langevin@maine.gov

(207) 287-5262

#### W002034-6F-F-R

#### 1. APPLICATION SUMMARY

On December 4, 2019, the Department of Environmental Protection (Department) accepted as complete for processing an application from the MAINE DEPARTMENT OF INLAND FISHERIES AND WILDLIFE (DIFW Governor Hill) for the renewal of combination Waste Discharge License (WDL) W-002034-6F-E-R/ Maine Pollutant Discharge Elimination System (MEPDES) permit ME0001091, which was issued on March 20, 2015, for a five-year term. The March 20, 2015 permit authorized a monthly average discharge of 1.2 million gallons per day (MGD) of fish hatchery wastewater from the DIFW Governor Hill Hatchery to Spring Brook, Class B, in Augusta, Maine.

#### 2. PERMIT SUMMARY

- a. This permitting action is carrying forward the terms and conditions of the March 20, 2015 permit except that it:
  - 1. Establishes the use of Halamid Aqua for control of bacterial gill disease.
- b. <u>History</u>: This section provides a summary of recent, relevant licensing/permitting actions that have been completed for the DIFW Governor Hill Fish Hatchery.

February 20, 1975-The U.S. Environmental Protection Agency (USEPA) issued National Pollutant Discharge Elimination System (NPDES) Permit #ME0001091 to the Maine Department of Inland Fish and Game for the discharge of an unspecified volume of wastewater from the Governor Hill Fish Hatchery to Spring Brook. The Permit was valid through February 15, 1980.

May 11, 1983-The Maine Board of Environmental Protection issued WDL #2034 for the discharge of a daily maximum of 1.0 MGD of fish hatchery wastewater from the DIFW Governor Hill Fish Hatchery to Spring Brook, Class B-1. The WDL was a renewal of a previously issued license #2034, although it eliminated parameters for suspended solids and eliminated monitoring requirements for all other parameters. The WDL was issued for a five-year term.

*July 21, 2000*-The Department issued # W-002034-5Q-A-R to the DIFW Governor Hill Fish Hatchery for the discharge of a daily maximum of 1.0 MGD of treated fish hatchery wastewater. The WDL was issued for a five-year term.

January 12, 2001-The Department received authorization from the USEPA to administer the NPDES permitting program in Maine, excluding areas of special interest to Maine Indian Tribes. From this point forward, the program has been referred to as the MEPDES program, and MEPDES permit #ME0101443 has been utilized for this facility. On March 26, 2011, the USEPA authorized the Department to administer the MEPDES program in Indian territories of the Penobscot Nation and Passamaquoddy Tribe.

#### W002034-6F-F-R

#### 2. PERMIT SUMMARY (cont'd)

February 2002- On behalf of DIFW, Fishpro Inc. submitted an Alternative Discharge Study report for all nine DIFW hatcheries and rearing stations. The study evaluated eliminating effluent discharges through: piping the discharges to larger receiving waters, connecting to municipal wastewater treatment facilities, wastewater storage collection, land application of wastewater, and discharging to existing wetland areas. The study determined that none of the alternatives evaluated were viable options for the DIFW facilities.

September 12, 2002-The Department submitted a report entitled Maine Department of Environmental Protection Water Quality Concerns and Effects from State Fish Hatchery Discharges to the Maine Legislature's Inland Fisheries and Wildlife Subcommittee's Commission to Study the Needs and Opportunities Associated with the Production of Salmonid Sport Fish in Maine and DIFW.

November 2002-FishPro Inc. submitted to DIFW its Comprehensive Statewide Fish Hatchery System Engineering Study addressing recommended upgrades to all DIFW fish hatcheries and rearing facilities.

July 11, 2003-The Department administratively modified WDL # W-002034-5Q-A-R to extend the 3-year schedule of compliance for BOD, TSS, and phosphorus effluent limits established in the WDL through the life of the WDL.

*June 27, 2005* -The Department received a timely application from DIFW for renewal of the WDL for the discharge of fish hatchery wastewater from the Augusta facility. The application was assigned WDL # W-002034-5Q-B-R and MEPDES permit #ME0001091.

July 5, 2006-The Department issued #ME0001091 / #W-002034-5Q-B-R for a five-year term.

October 10, 2008-The Department issued minor revision #ME0001091 / #W-002034-5Q-C-M to amend the formalin limit.

*April 23*, 2009-The Department issued minor revision #ME0001091 / #W-002034-5Q-D-M to amend the monitoring frequencies for BOD<sub>5</sub> and TSS.

October 1, 2009-The Department issued Field Determination #8101 that concluded that the "stream (Spring Brook) starts below the dam which is approximately 550 feet from the end of the runway structure."

*June 2, 2010*-The Department ratified a Consent Agreement with DIFW for the violations incurred at several hatchery facilities including the Augusta hatchery.

*June 28, 2011* - DIFW submitted a timely and complete General Application to the Department for renewal of the July 5, 2006 MEPDES permit. The application was accepted for processing on June 30, 2011 and was assigned WDL #W002034-6F-E-R / MEPDES #ME0001091.

#### 2. PERMIT SUMMARY (cont'd)

*March 20, 2015*- The Department issued #ME0001091 / #W-002034-5F-E-R for a five-year term.

*December 2, 2019* - DIFW submitted a timely and complete General Application to the Department for renewal of the March 20, 2015 MEPDES permit. The application was accepted for processing on December 4, 2019 and was assigned WDL #W002034-6F-F-R / MEPDES #ME0001091.

c. <u>Source Description</u>: The DIFW Augusta, or Governor Hill State Fish Hatchery, was formerly a private fish hatchery owned by Governor John Hill that was converted to a state aquaculture facility in 1923. The DIFW Governor Hill facility is located on a 180-acre parcel of state-owned land. A map showing the location of the treatment facility is included as Fact Sheet **Attachment A**. The facility consists of a hatchery building, concrete raceways for rearing, and a settling pond.

This Hatchery is a state brook trout, lake trout, and splake hatchery and rearing facility. Fish are hatched and reared at this and other DIFW facilities to appropriate sizes for stocking in Maine waters as part of DIFW's responsibilities in managing fisheries in Maine.

d. Influent Water: Water is supplied to the DIFW Governor Hill facility from two wells and two springs (Spring Pond #1 and Spring Pond #2) located on site. The wells supply source water to the hatchery and early rearing facility and the springs supply source water to the raceways. Well #1 and Well #2 were installed in 1999 and 2000 respectively, with each capable of yielding approximately 200 gallons per minute (gpm). Each well supplies water to the hatchery building via independent 8-inch diameter pipelines. Half of the well water supply is passed through a liquid oxygenation system prior to use in the hatchery building for early rearing, while half consists of non-enhanced flow. The spring ponds are approximately 2.47 million gallons (upper pond), and 1.2 million gallons, (lower pond) and yield flows of approximately 620 gpm, however flows are reduced during summer months. Spring water temperatures range from 39-50 degrees F (4-10 degrees C) through the year. The ponds are dredged approximately every ten years. Each spring has a covered outlet, which contains a coarse screen to exclude large organic matter. The outlet feeds an 8-inch diameter, 100-foot long pipeline, which runs to the head of the raceways. Other artesian flows are collected from small abandoned raceways on site and routed to the raceways via 6-inch and 8-inch diameter lines. The facility provides no physical or chemical treatment of spring water.

Governor Hill is a flow-through facility with flows through its hatchery and rearing facilities discharged to Spring Brook (Class B, less than 10 square mile watershed), followed by Bond Brook (Classes B and C) and the Kennebec River (Class B).

#### 2. PERMIT SUMMARY (cont'd)

- e. <u>Broodstock Facilities</u>: Governor Hill maintains brook trout and lake trout broodstock on site in the last two raceway pools. Once brook trout broodstock reach 3 years of age, they are stocked out in various waters. Governor Hill's lake trout brood are generated from onsite brood stock, which are used for approximately ten years, then stocked out in various waters.
- f. <u>Hatchery Facilities</u>: Governor Hill's hatchery facilities consist of thirty-nine, 63-inch diameter fiberglass combi-tanks with influent water supplied exclusively by well water. Eggs are brought into the hatchery facility from October through early December. Each line of tanks is typically dedicated to a particular fish strain.
  - Each strain starts to feed at different times. Generally, eggs "eye-up" in approximately thirty days from the time they are received at Governor Hill, hatch approximately 15 days after eye-up, and begin to feed approximately 15 days after hatching. Fry are moved to the outside rearing structures as those raceways are cleared of fish through stocking in the spring, usually when they reach an approximate size of 250 fish per pound. As lake trout grow better inside in a dark environment than outside, the lake trout are kept inside the hatchery building until September in three to four tanks before they are moved outside. This means that the hatchery facility contains eggs or fry for all but approximately 6 weeks during the year. When tanks become empty, they are cleaned as described below. Hatchery facility flow-through water and cleaning wastewater flow directly to the facility settling pond.
- g. Rearing Facilities: Governor Hill's rearing facilities consist of two sizes of covered concrete raceway pools. The first six raceway pools are 5-feet x 50-feet x 2-feet deep (operational depth)(3,740-gallons each) and are referred to as the "six block". These raceway pools are arranged in two sets of three adjacent pools and flow into the next pools. The remaining ten raceway pools are 6-feet x 100-feet x 2-feet deep (operational depth) (8,976-gallons each). These raceway pools are arranged in two parallel lines of 5 pools. Generally, the "six block" is used to house lake trout "production fish" and any future brood fish. The first set of 100-foot pools are used to house splake, the next six pools are used to house brook trout, and the last set of two pools are used for adult brood fish.

Once fish are moved to the outside raceways, they are fed a controlled amount of food per day depending on their body weight and water temperature. Feeding rates are adjusted to either speed up or slow fish growth to address management goals. All fish are hand fed, with auto demand feeders used as a secondary feed. When demand feeders are used, only enough feed is used to meet that day's feed requirement. Brood fish are only fed a maintenance diet. In its 2019 renewal application, Governor Hill indicated using an average of 70 lbs./day and a maximum of 112 lbs./day. The 2019 application also indicated that the months wherein the maximum amount of feeding took place were in September and April.

#### 2. PERMIT SUMMARY (cont'd)

Governor Hill starts each year with approximately 1.2 million eggs for hatching and rearing. In its 2019 renewal application, Governor Hill indicated a maximum quantity of fish on station of: 420,321 first year fish weighing 19,032 pounds, 9,000 second year fish weighing 8,800 pounds, and 1,400 broodstock weighing 5,688 pounds.

h. <u>Wastewater Treatment</u>: Governor Hill hatchery and rearing facility flow-through and cleaning wastewater flows are discharged to the facility's 30-foot x 700-foot x 6-foot deep (942,480 gallons)<sup>1</sup> settling pond. The settling pond is cleaned as needed through dredging, with accumulated materials removed and properly disposed of.

Hatchery combi-tank flow-through water is discharged into hatchery facility effluent piping, which leads to the facility's in-stream settling pond. Hatchery combi-tanks are cleaned daily through removal of a center pipe in each tank, which causes deposited waste material to be discharged into the same common effluent piping that carries flow-through water to the in-stream settling pond. At the end of the hatching season, tanks are cleaned using a scrub brush and a solution of iodine and water, rinsed and left to dry. Seasonal cleaning water is discharged in the same manner as flow-through and daily cleaning wastewater flows. Supply water for any seasonally discontinued tanks is routed to the outside raceways.

Raceway flow-through water enters the in-stream settling pond at the end of the facility. To clean the raceways, DIFW staff has historically scrubbed the sides and bottoms from the top end of the raceway pool moving down-flow toward the bottom end. At the bottom of all raceway pools is located a screened 1.5-foot long "quiescent zone" with a covered discharge pipe routed to a common 10-inch diameter underground raceway cleaning wastewater pipe to the facility in-stream settling pond, described below. After the raceway pool and quiescent zone screen are cleaned, the quiescent zone plug is replaced and the cleaners move to the next raceway pool. The raceway pool cleaning schedule varies through the growing season from every day to once per week, as needed.

A process flow diagram submitted by the permittee is included as Fact Sheet **Attachment B.** 

This space intentionally left blank

<sup>&</sup>lt;sup>1</sup> The dimensions of the settling pond and the corresponding volume are changed from "30-foot x 700-foot x 3-foot" and 472,270 gallons, respectfully.

#### 3. CONDITIONS OF PERMIT

Conditions of licenses, 38 M.R.S. § 414-A, requires that the effluent limitations prescribed for discharges, including, but not limited to, effluent toxicity, require the application of best practicable treatment (BPT), be consistent with the U.S. Clean Water Act, and ensure that the receiving waters attain the State water quality standards as described in Maine's Surface Water Classification System. In addition, Certain deposits and discharges prohibited, 38 M.R.S. § 420 and Department rule Surface Water Toxics Control Program, 06-096 CMR 530 (effective March 21, 2012), require the regulation of toxic substances not to exceed levels set forth in Surface Water Quality Criteria for Toxic Pollutants, 06-096 CMR 584 (effective February 16, 2020), and that ensure safe levels for the discharge of toxic pollutants such that existing and designated uses of surface waters are maintained and protected.

#### 4. RECEIVING WATER QUALITY STANDARDS

Classification of major river basins, 38 M.R.S.§ 467(4)(I) classifies the "Kennebec River, minor tributaries- Class B unless otherwise specified," which includes Spring Brook at the point of discharge. *Standards for classification of fresh surface waters*, 38 M.R.S. § 465(3) describes the standards for Class B waters.

38 M.R.S. § 464 (4)(A) specifies that "Notwithstanding section 414-A, the department may not issue a water discharge license for any of the following discharges: (1) Direct discharge of pollutants to waters having a drainage area of less than 10 square miles, except that: (A) Discharges into these waters that were licensed prior to January 1, 1986 are allowed to continue only until practical alternatives exist ... "

Prior to issuing a discharge license, the Department requires the applicant to objectively demonstrate to the Department's satisfaction that the discharge is necessary and that there are no other reasonable alternatives available. An Alternative Discharge Study performed by Fishpro for multiple DIFW facilities (including Governor Hill) indicates that there are no reasonable alternatives to the current discharge. DIFW (via email correspondence to the Department dated December 13, 2019) confirmed that the 2002 Fishpro conclusions that there are no practical alternatives to the discharge is valid for purposes of this permitting action.

#### 5. RECEIVING WATER QUALITY CONDITIONS

The State of Maine 2016 Integrated Water Quality Monitoring and Assessment Report (Report), prepared by the Department pursuant to Sections 303(d) and 305(b) of the Federal Water Pollution Control Act, lists "Spring Brook (Augusta) From Gov. Hill fish hatchery to Mt Vernon Rd, Augusta" (Integrated Report Assessment Unit ID ME0103000324\_333R\_02) as "Category 5-A: Rivers and Streams Impaired by Pollutants Other Than Those Listed in 5-B Through 5-D (TMDL Required)." This listing is attributed to past benthic macroinvertebrate bioassessments and in-stream total phosphorus levels. The most recent bioassessment (completed in the summer of 2013) data indicated that Spring Brook attained its current Class B aquatic life standards.

#### 5. RECEIVING WATER QUALITY CONDITIONS (cont'd)

The Report lists all of Maine's fresh waters as, "Category 4-A: Waters Impaired by Atmospheric Deposition of Mercury." Impairment in this context refers to a statewide fish consumption advisory due to elevated levels of mercury in some fish tissues. The Report states, "All freshwaters are listed in Category 4A (Total Maximum Daily Load (TMDL) Completed) due to the USEPA approval of a Regional Mercury TMDL. Maine has a fish consumption advisory for fish taken from all freshwaters due to mercury. Many waters and many fish from any given water do not exceed the action level for mercury. However, because it is impossible for someone consuming a fish to know whether the mercury level exceeds the action level, the Maine Department of Health and Human Services decided to establish a statewide advisory for all freshwater fish that recommends limits on consumption. Maine has already instituted statewide programs for removal and reduction of mercury sources."

The Department has made a best professional judgment determination based on information gathered to date, that as permitted, the discharge will not cause or contribute to the failure of the receiving water to meet the standards of its ascribed classification and the designated uses of the waterbody will continue to be maintained and protected. If future modeling determines that at full permitted discharge limits, the discharge is causing or contributing to the non-attainment, this permit will be re-opened per Special Condition K, *Reopening of The License For Modifications*, to impose more stringent limitations to meet water quality standards.

#### 6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS

- a. Applicability of National Effluent Guidelines: The USEPA has promulgated national effluent guidelines for the *Concentrated Aquatic Animal Production Point Source Category* at 40 CFR 451 Subpart A, *Flow-Through and Recirculating Systems Subcategory*. This subpart is applicable to discharges from a concentrated aquatic animal production facility that produces 100,000 lbs. or more per year of aquatic animals in a flow-through or recirculating system. For the DIFW Governor Hill facility, the maximum pounds of fish on station as reported for the reporting period of April 2015 December 2019, at any time consisted of a maximum of 26,649 lbs. The facility's daily maximum of 26,649 lbs./day is less than the 100,000 lbs. per year applicable threshold, and is therefore not categorically subject to regulation under this subpart.
- b. <u>Flow:</u> This permitting action is carrying forward, a monthly average discharge flow limitation of 1.2 MGD based on the design capacity of the treatment facility.

A summary of the discharge flow data as reported on the monthly Discharge Monitoring Reports (DMRs) for the period of April 2015 – December 2019 is as follows:

Flow in Conduit (DMR=55)

Discharge Flow	Minimum	Maximum	Arithmetic Mean
Monthly Average	1.2 MGD	1.2 MGD	1.2 MGD

- c. <u>Dilution Factors</u>: Dilution factors associated with the permitted discharge flow of 1.2 MGD from the facility and a flow of 0 cubic feet per second (cfs) in Spring Brook (which represents the Governor Hill hatchery facility position in the headwaters of Spring Brook) were derived in accordance with 06-096 CMR 530(4)(A). Previous permitting action utilized a chronic dilution of 1.0:1.0 based on a 7Q10 low flow value of 0 cfs. Accordingly, the Governor Hill discharge constitutes the only flow in that portion of Spring Brook. Based on this information, the Department is carrying forward the acute (1Q10), chronic (7Q10) and harmonic mean dilution factors of 1.0:1.0.
- d. <u>TSS</u>: This permit is carrying forward, monthly average and daily maximum concentration limits of 6 mg/L and 10 mg/L respectively and monthly average and daily maximum mass limitations of 17 lbs./day and 100 lbs./day respectively. These limits are based on the Department's Best Professional Judgement (BPJ) of Best Practicable Treatment (BPT).

The Department reviewed 54 DMRs that were submitted for the period April 2015 – December 2019. It is noted that the mass monthly average limit of 17 lbs./day was exceeded in June and September of 2018. A review of the data indicates the following:

#### TSS Mass (DMRs = 54)

Value	Limit (lbs./day)	Range (lbs./day)
Monthly Average	17	0 - 21
Daily Maximum	100	21-100

#### TSS concentration (DMRs = 54)

Value	Limit (mg/L)	Range (mg/L)
Monthly Average	6	< 2 - 6
Daily Maximum	10	< 2 - 10

e. <u>Dissolved Oxygen:</u> The Department reviewed 20 DMRs that were submitted for the period of April 20, 2015 – December 4, 2019. A review of the data indicates the following:

Dissolved Oxygen (DMR=20)

Parameter	Minimum	Maximum	Mean
Monthly Average	9.75	10.53	10.16
Daily Maximum	10.00	10.80	10.34
Daily Minimum	9.40	10.30	9.97

As referenced previously, The Class B dissolved oxygen standard is:

The dissolved oxygen content of Class B waters may not be less than 7 parts per million or 75% of saturation, whichever is higher, except that for the period from October 1st to May 14th, in order to ensure spawning and egg incubation of indigenous fish species, the 7-day mean dissolved oxygen concentration may not be less than 9.5 parts per million and the 1-day minimum dissolved oxygen concentration may not be less than 8.0 parts per million in identified fish spawning areas. 38 M.R.S. § 465(3)(B)

Data indicates that the facility DO was consistently within the Class B water quality standards. This permitting action is carrying forward the seasonal reporting requirement and daily minimum effluent concentration for dissolved oxygen to ensure the discharge does not cause or contribute to nonattainment of Class B dissolved standards.

f. <u>Total Phosphorus</u>: The monthly average mass limitation of 0.24 lbs./day is a water quality-based limit necessary to ensure compliance with Class B water quality standards and is being carried forward in this permitting action. The 3/20/2015 permitting action eliminated the concentration limitation for total phosphorous, but still required concentration data to be reported. This permitting action is carrying that action forward. Monitoring remains limited to June through September.

The Department reviewed 20 DMRs that were submitted for the period April 2015-December 2019. It is noted that the monthly average mass limit was exceeded every month. A review of the data indicates the following:

**Total-P Concentration (DMR=20)** 

Value	Limit	Range (mg/L)	Mean (mg/L)
Monthly Average	Report	0.03 - 0.06	0.05
Daily Maximum	Report	0.04 - 0.06	0.05

#### **Total-P Mass (DMR=20)**

Value	Limit (Lbs./day)	Range (Lbs./day)	Mean (Lbs./day)
Monthly Average	0.24	0.34 - 0.63	0.45
Daily Maximum	Report	0.35 - 0.64	0.48

g. <u>Fish on Hand</u>: In the March 20, 2015 permit, a 1/Month reporting requirement of daily maximum mass for fish on hand was established. This permit is carrying that action forward. A review of the DMR data for the MDIFW Governor Hill facility for the period of April 2015 through December 2019 indicates the following.

#### Fish on Hand (DMR=55)

Value	Limit lbs./day	Range lbs./day	Mean lbs./day
Daily Maximum	Report	9,136–26,649	18,391

h. Formalin: Formalin is a drug used to treat fungal infections and external parasites of finfish and finfish eggs. Neither the Department nor USEPA have promulgated ambient water quality criteria for formalin. Using best professional judgment, the Department has established water quality-based thresholds for formalin based on Whole Effluent Toxicity (WET) testing on the water flea (*Ceriodaphnia dubia*) for 48-hour acute toxicity. For one-hour treatments, which are typical of most hatchery and rearing facility operations, the Department has established an ambient water quality threshold of 45 mg/L. Rarely, certain circumstances require use of formalin to control disease on additional rearing structures which results in the discharge of formalin for periods longer than the typical one-hour period for normal disease treatment. To ensure water quality standards are met and that formalin is not discharged at levels that would be toxic to aquatic life in the receiving water, the Department has established an ambient water quality threshold of 25 mg/L based on best professional judgment for a maximum 24-hour treatment period.

Water quality-based effluent limitations for formalin are calculated as follows:

45 mg/L (1-hour acute criteria) x 1.0 (effluent dilution) = 45 mg/L formalin limit. 25 mg/L (24-hour acute criteria) x 1.0 (effluent dilution) = 25 mg/L formalin limit.

Mass limits derived from the updated concentration limits, and taking into consideration the settling basin are calculated as such:

Settling basin dimensions: 30' (W) x 700' (L) x 6' (D)= 126,000 cubic feet (ft<sup>3</sup>)

 $126,000 \text{ (ft}^3\text{) x } 7.48 \text{ gal/ ft}^3 = 942,480 \text{ gallons } (0.94248 \text{ MG})$ 

#### For 1 hr. treatments:

1.2 MGD / 24 = 0.05 MG

0.05 MG + 0.94248 MG = 0.99248 MG

0.99248 MG x 9.03 lbs./gal. x 45 mg/L = 403.29424 lbs./hr. or 403 lbs./hr.

#### For 24 hr. treatments:

1.2 MG + 0.94248 MG = 2.14248 MG

2.14248 MG x 9.03lbs./gal. x 25 mg/L = 483.66485 lbs./day or **484 lbs./day** 

Since the 2006 permit, mass limits have been carried forward based on the following language from the 2008 revision:

"Effluent mass limits were previously and remain calculated based on the permittee's projected maximum amount of formalin used per day (10.4-gallons) times the weight of formalin (9.13 lbs./gal), resulting in a value of 95 lbs./day."

Based on the above mass calculations, the 24-hour and 1-hour treatment limits of 484 lbs./day and 403 lbs./hour, respectively, are less stringent than the previously established limit of 95 lbs./day. Therefore, based on the Departments BPJ of AWQC, the mass limit established in the 2006 permit (and carried forward since that time) is being carried forward in this permitting action.

In order to better clarify reporting requirements, the 3/20/15 permit revised formalin monitoring to 1/Occurrence. This permit will carry that action forward. A review of the DMR data for the IFW Governor Hill facility for the period of April 2015 through June 2019 indicates the following.

#### Formalin Mass (DMR=34)

Value	Limit lbs./day	Range lbs./day
Monthly Average	Report	2.00 - 37.00
Daily Maximum	95	2.00 - 95.00

#### W002034-6F-F-R

#### 7. DISCHARGE IMPACT ON RECEIVING WATER QUALITY

As permitted, the Department has determined the existing water uses will be maintained and protected provided and the discharge will not cause or contribute to the failure of Spring Brook to meet standards for Class B classification.

#### 8. PUBLIC COMMENTS

Public notice of this application was made in the Kennebec Journal newspaper on or about 11/27/2019. The Department receives public comments on an application until the date a final agency action is taken on the application. Those persons receiving copies of draft permits must have at least 30 days in which to submit comments on the draft or to request a public hearing, pursuant to *Application Processing Procedures for Waste Discharge Licenses*, 06-096 CMR 522 (effective January 12, 2001).

#### 9. DEPARTMENT CONTACTS

Additional information concerning this permitting action may be obtained from, and written comments sent to:

Breanne Blaisdell
Division of Water Quality Management
Bureau of Water Quality
Department of Environmental Protection
17 State House Station

Augusta Maine 04323 0017


Augusta, Maine 04333-0017 Telephone: (207) 287-1298

e-mail: Breanne.Blaisdell@maine.gov

#### 10. RESPONSE TO COMMENTS

During the period of January 2, 2020 through the effective date of this final agency action, the Department solicited comments on the draft MEPDES permit. The Department did not receive any substantive comment on the draft permit. It is noted that minor typographical and grammatical errors identified in comments were not summarized in this section, but were corrected, where necessary, in the final permit.

## **ATTACHMENT A**

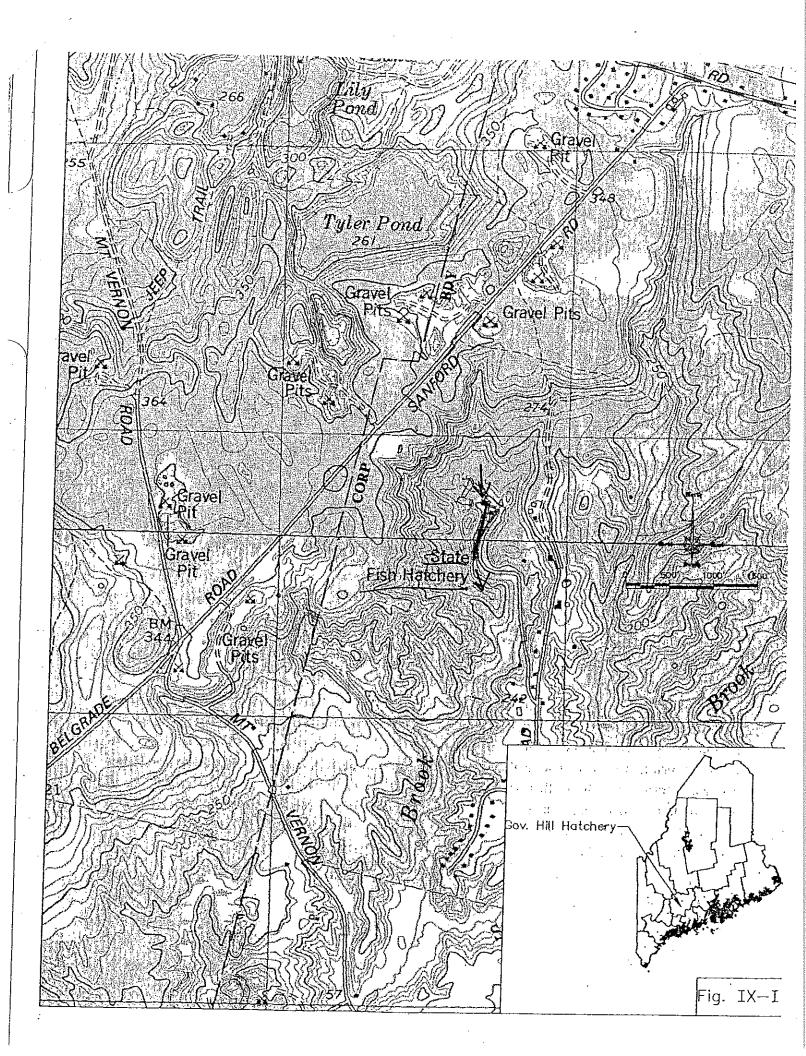

## **ATTACHMENT B**

### <u>Governor Hill Hatchery – Outdoor Raceway Diagram</u>

5 x 50 foot raceways Pools 1 thru 6
6 x 100 foot raceways Pools 7 thru 16

# Governor Hill Hatchery – Hatchery Building Diagram Aluminum Troughs Head Box Drain Trough --**Hatchery Schematic** 1. (2) 14"x 120" Flow-through troughs (used for egg jars) 2. (43) 60" dia x 35" h combi tanks