



EM: Inductive Sources




Motivation


Large areas to be covered

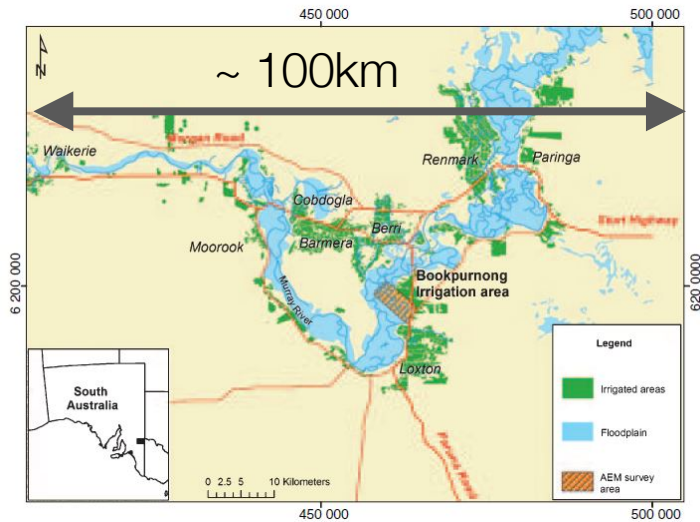

Groundwater

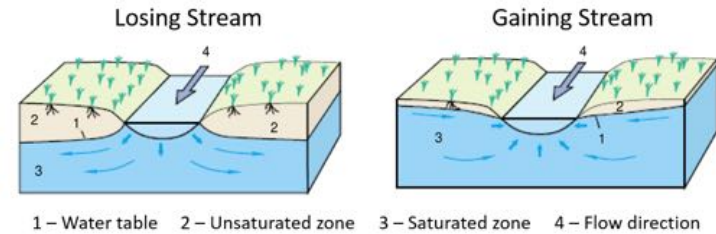

High resolution near surface

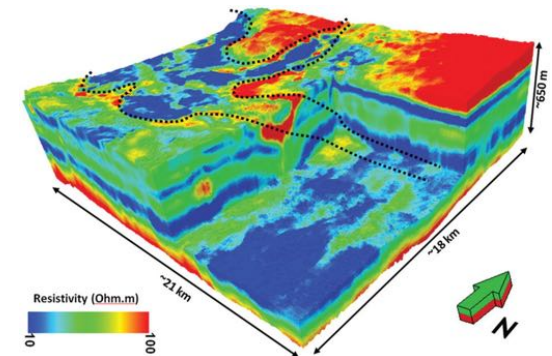

Rugged terrain



Minerals



Outline

Setup

- Basic experiment
- Transmitters, Receivers

Frequency Domain EM


- Vertical Magnetic Dipole
- Effects of Frequency
- Case History – Groundwater

Time Domain EM

- Vertical Magnetic Dipole
- Propagation with Time
- Case History – Oil and gas

Important questions

- What is the target?
 - at the surface? At depth?. 1D, 2D, 3D?
- Transmitter
 - Location: surface? in the air?
 - Waveform: frequency or time?
 - “Size” and orientation?
- Exciting the target
 - Conductivity of the target and host
 - Geometry of the target (Coupling)
- Receiver and data
 - What fields to measure?
 - What instrument?
- Where to collect data? How many? How accurate?
- What is depth of investigation?
- What is the “footprint” of the transmitter”
 - These are questions of SURVEY DESIGN

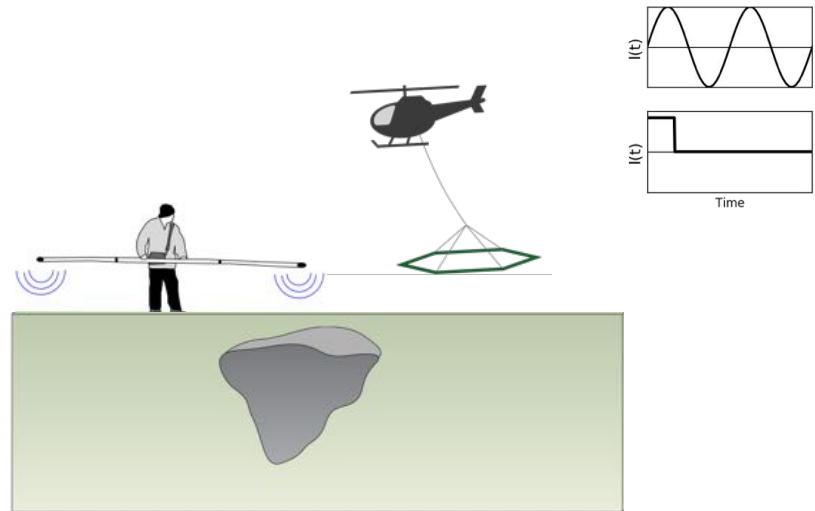

Basic Experiment

- **Transmitter:**



- Produces a primary magnetic field

- **Exciting the target:**

- Time varying magnetic fields generate electric fields everywhere
- Producing currents in conductors


- **Receiver:**

- Induced currents produce secondary magnetic fields

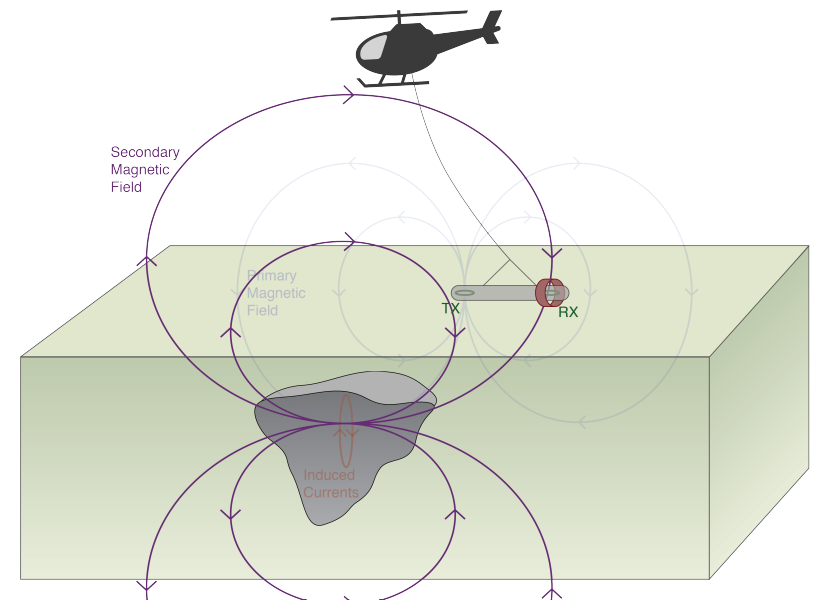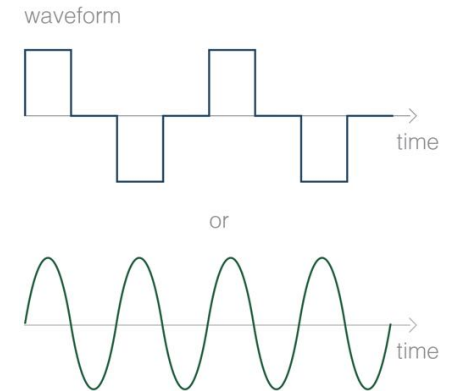

Transmitter

Large areas

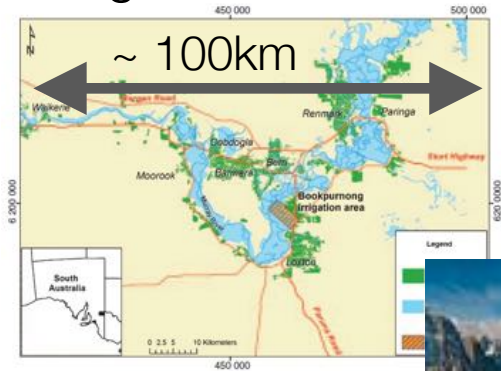


Rugged terrain



Airborne Survey




Resolve

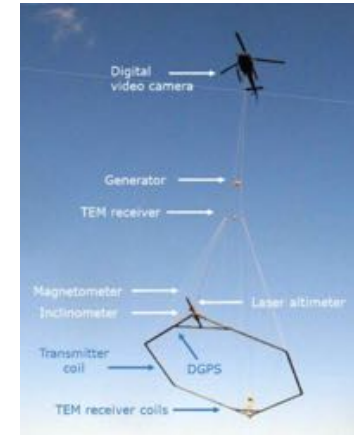


SkyTEM

Deep Targets

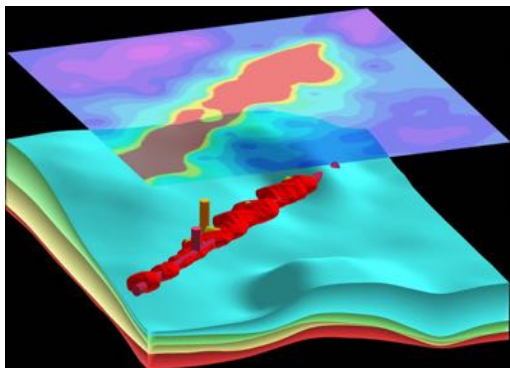


Large Loop

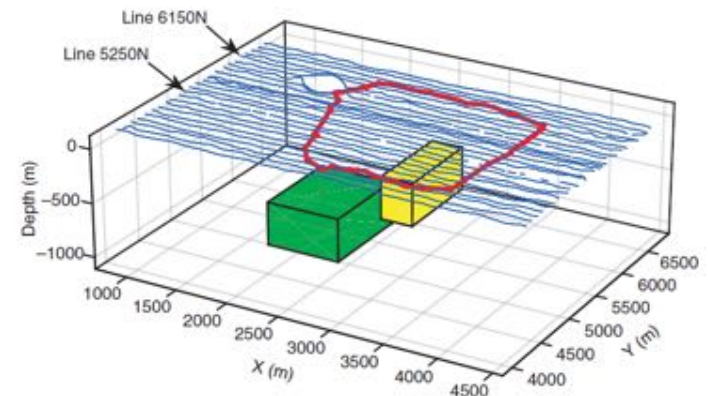

Transmitter


- Frequency or Time?

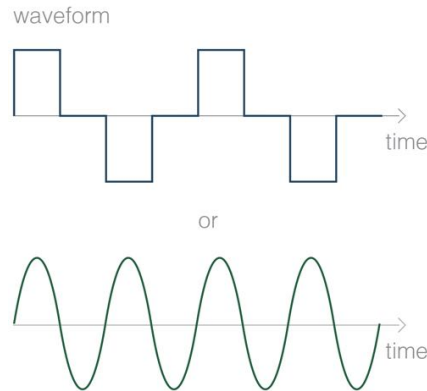

- Key factor is moment

$$m = I \text{ (current)} A \text{ (area)} N \text{ (\# of turns)}$$


$$\mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \left(\frac{3\mathbf{r}(\mathbf{m} \cdot \mathbf{r})}{|\mathbf{r}|^5} - \frac{\mathbf{m}}{|\mathbf{r}|^3} \right)$$

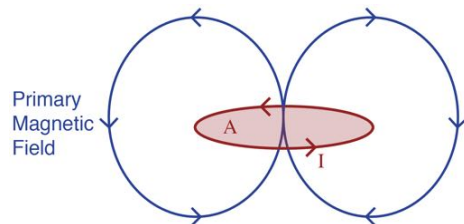

Airborne Survey




Resolve

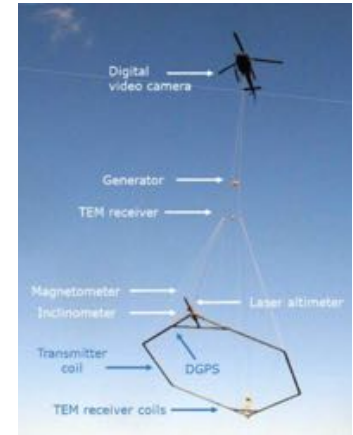

SkyTEM


Large Loop

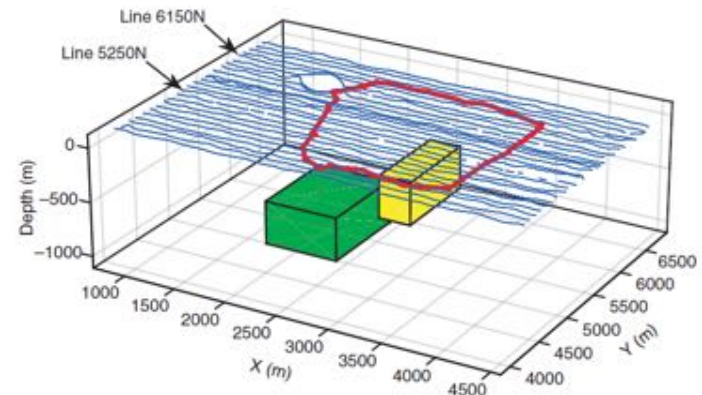

Exciting the target

- Primary field from a loop
- Fields fall off
 - $1/r^3$ geometric decay
 - Attenuation
- Want to be as close as possible to target
 - Ground based systems
 - Helicopter
 - Fixed wing aircraft
- Always concerned about coupling

$$\mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \left(\frac{3\mathbf{r}(\mathbf{m} \cdot \mathbf{r})}{|\mathbf{r}|^5} - \frac{\mathbf{m}}{|\mathbf{r}|^3} \right)$$

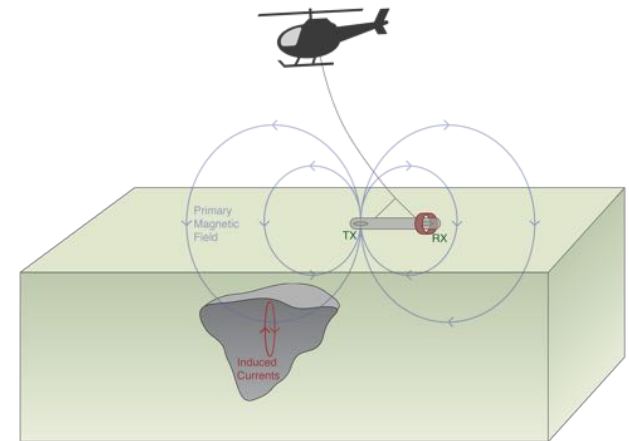


Receiver and Data

Magnetometer

- Measures:
 - Magnetic field
 - 3 components
- eg. 3-component fluxgate

$\mathbf{b}(t)$




Fluxgate


Coil

- Measures:
 - Voltage
 - Single component that depends on coil orientation
 - Coupling matters
- eg. airborne frequency domain.
 - ratio of H_s/H_p is the same as V_s/V_p

$\frac{\partial b}{\partial t}$




Coil


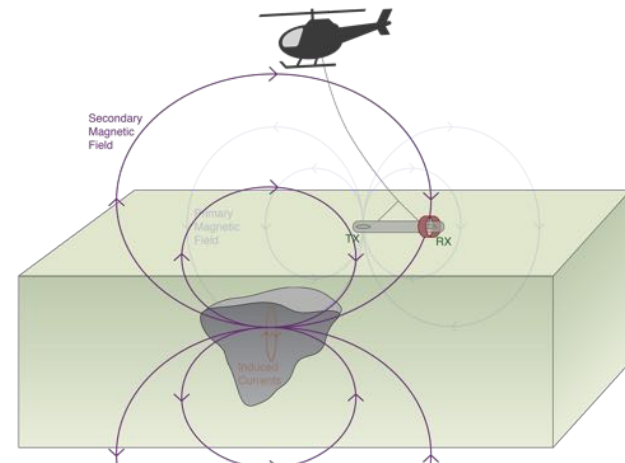


Receiver: Frequency Domain

- Primary field
 - always “on”
 - large compared to secondary fields
- Primary removal
 - Compute and subtract
 - Bucking coil

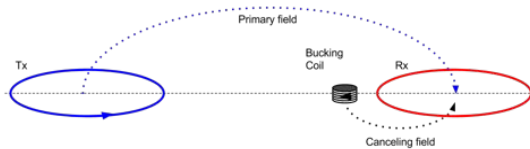

- Main requirement:
 - Know positions of Tx and Rx
 - Keep them in one unit

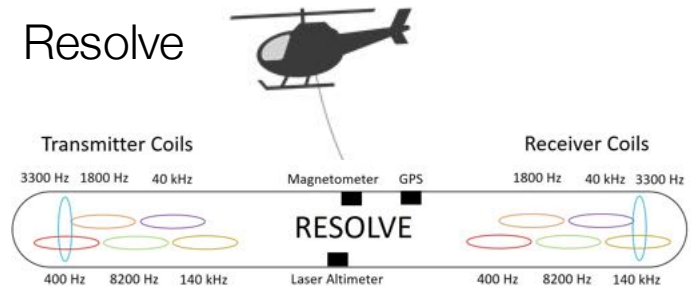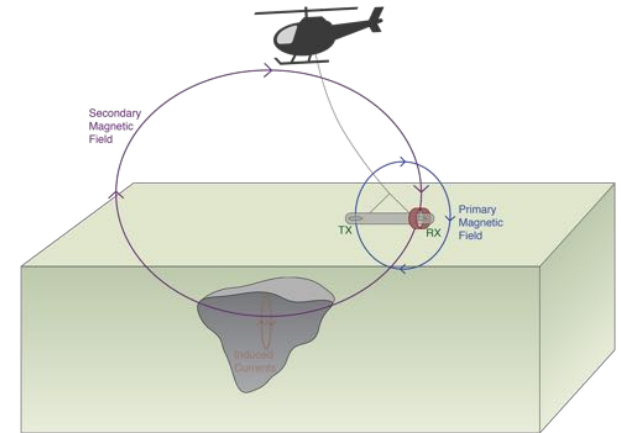


EM-31




Receiver: Time Domain


- Primary field has off-time
- Measure secondary fields
- Receivers can be mounted on transmitter loop or above it

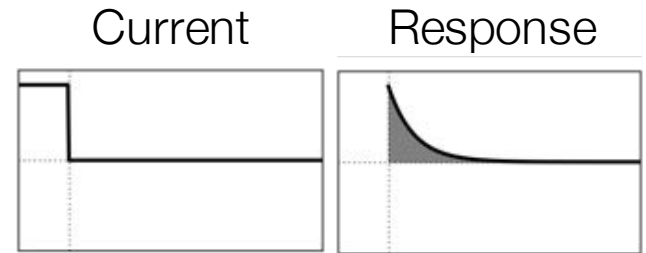

SkyTEM

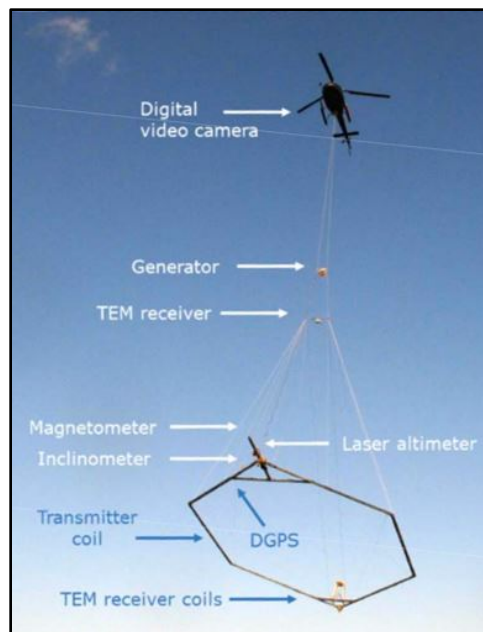


HeliSAM

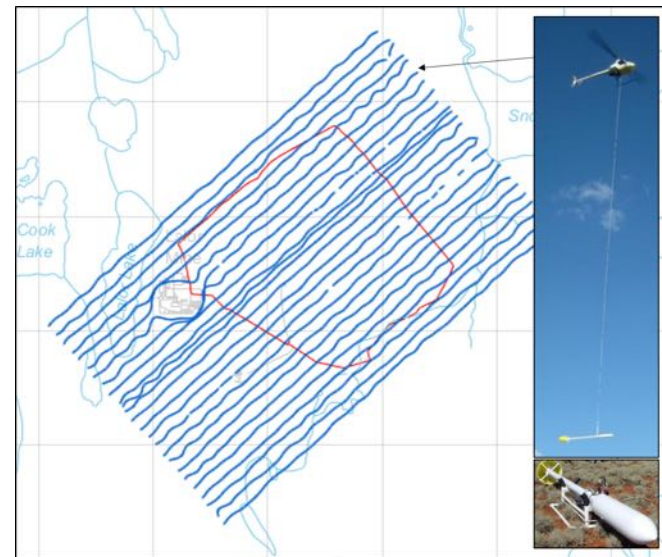


Important questions

- What is the target?
 - at the surface? At depth?. 1D, 2D, 3D?
- Transmitter
 - Location: surface? in the air?
 - Waveform: frequency or time?
 - “Size” and orientation?
- Exciting the target
 - Conductivity of the target and host
 - Geometry of the target (Coupling)
- Receiver and data
 - What fields to measure?
 - What instrument?
- Where to collect data? How many? How accurate?
- What is depth of investigation?
- What is the “footprint” of the transmitter”
 - These are questions of SURVEY DESIGN

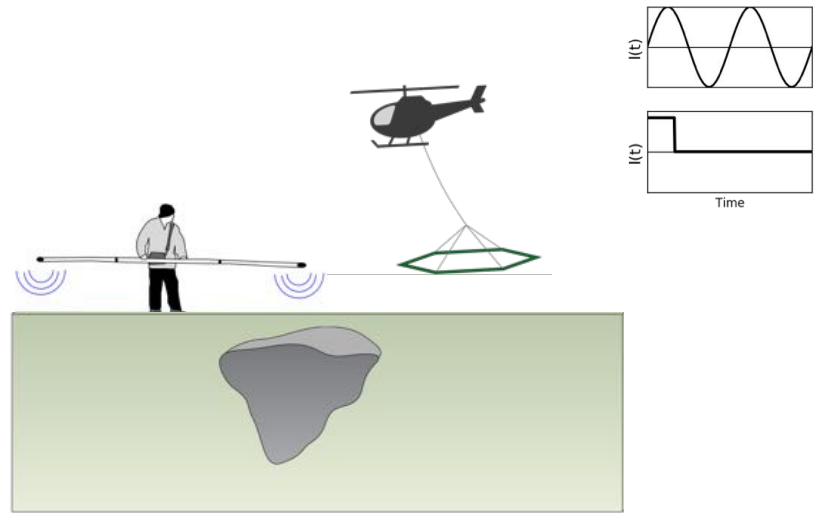


Footprint of Airborne EM system

- What volume of earth is “seen” by the airborne system?
 - Where are the currents?
- Currents depend on
 - Transmitter
 - Waveform: frequency or time
 - Background conductivity
- Simple case: loop source over homogeneous earth


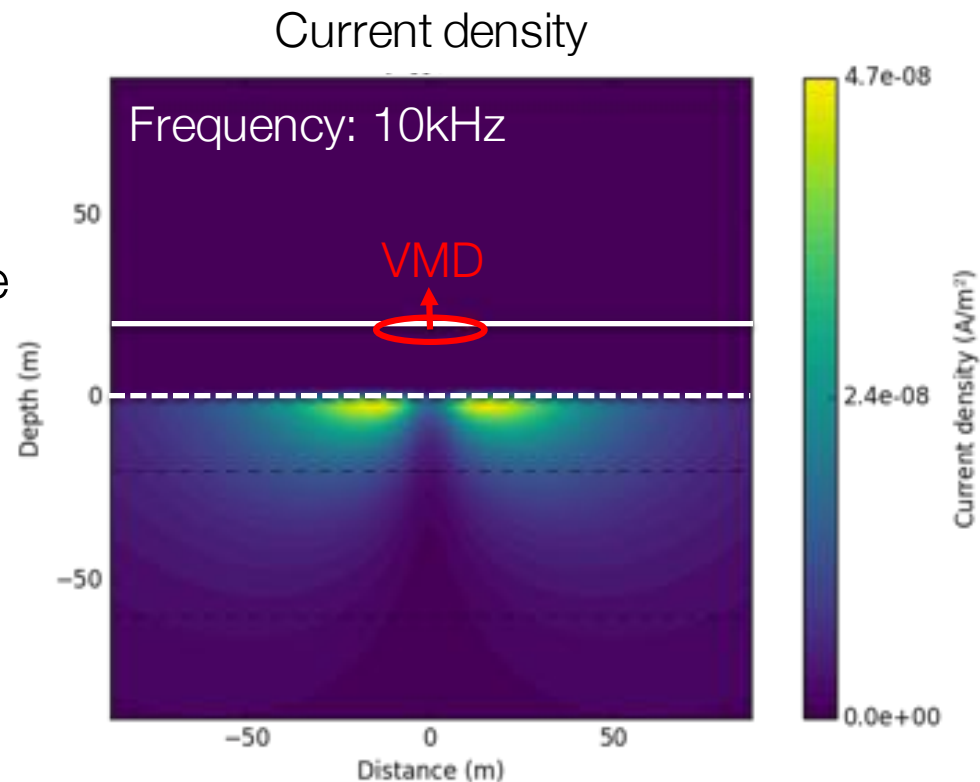


Vertical Magnetic Dipole (VMD)

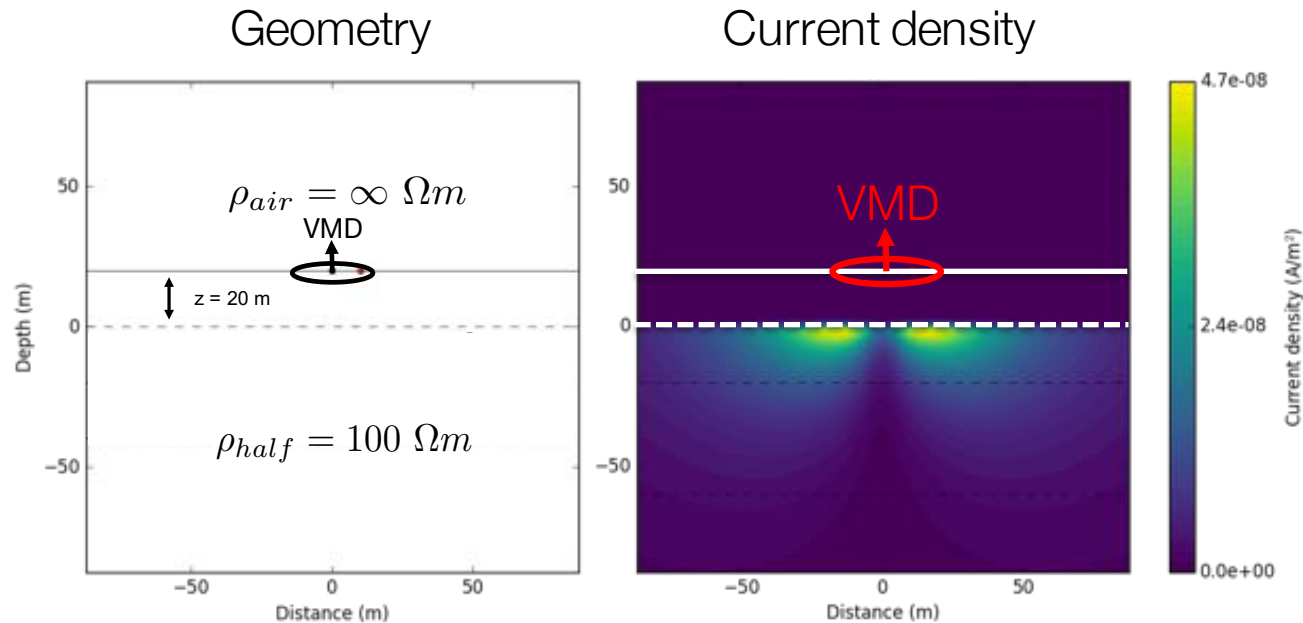

- Some questions
 - Where, and how strong, are the currents?
 - How do they change with transmitter frequency?
 - How do they depend upon the conductivity?
 - What do the resulting magnetic fields look like?


Vertical Magnetic Dipole over a halfspace (FDEM)

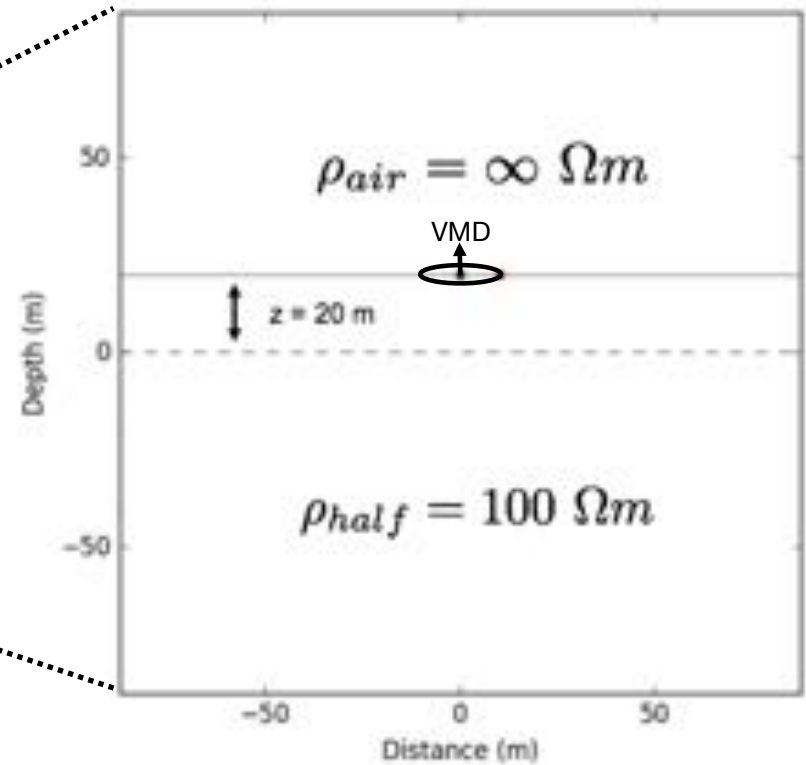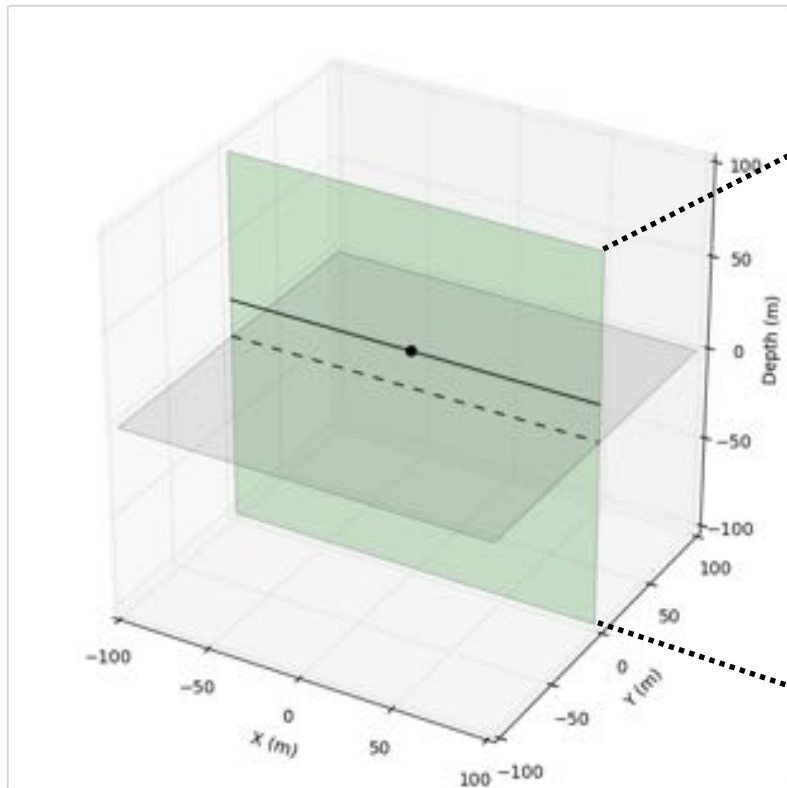


Current Density

- Frequency = 10 kHz
- Currents in the earth flow in planes parallel to the Tx


Plan view

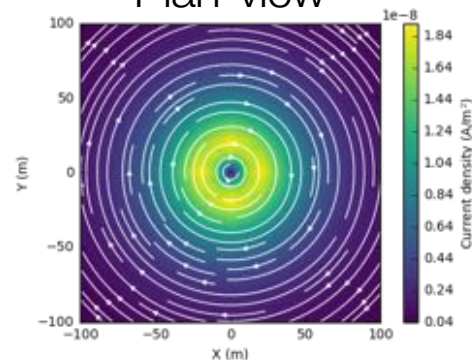

Geometry


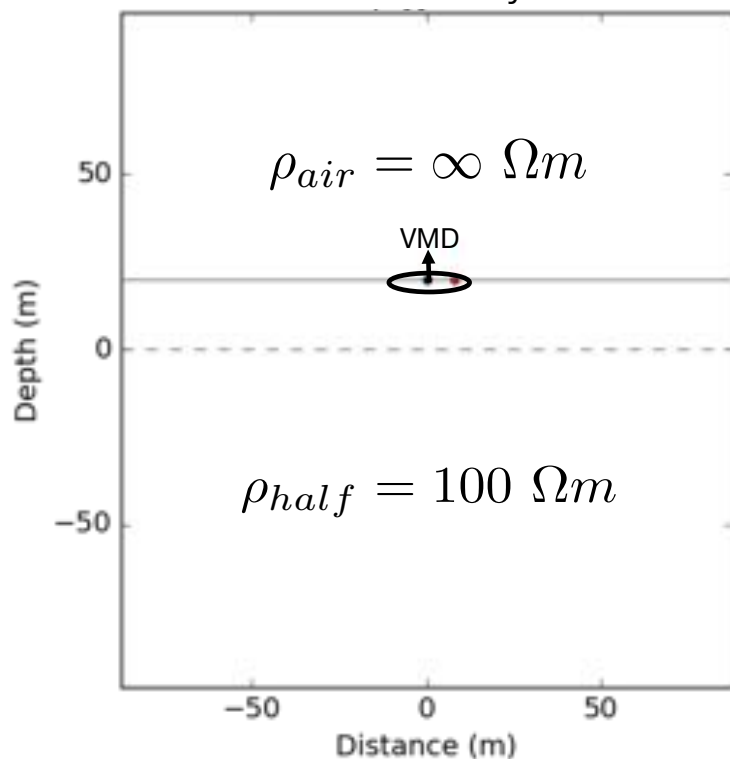


J_y amplitude

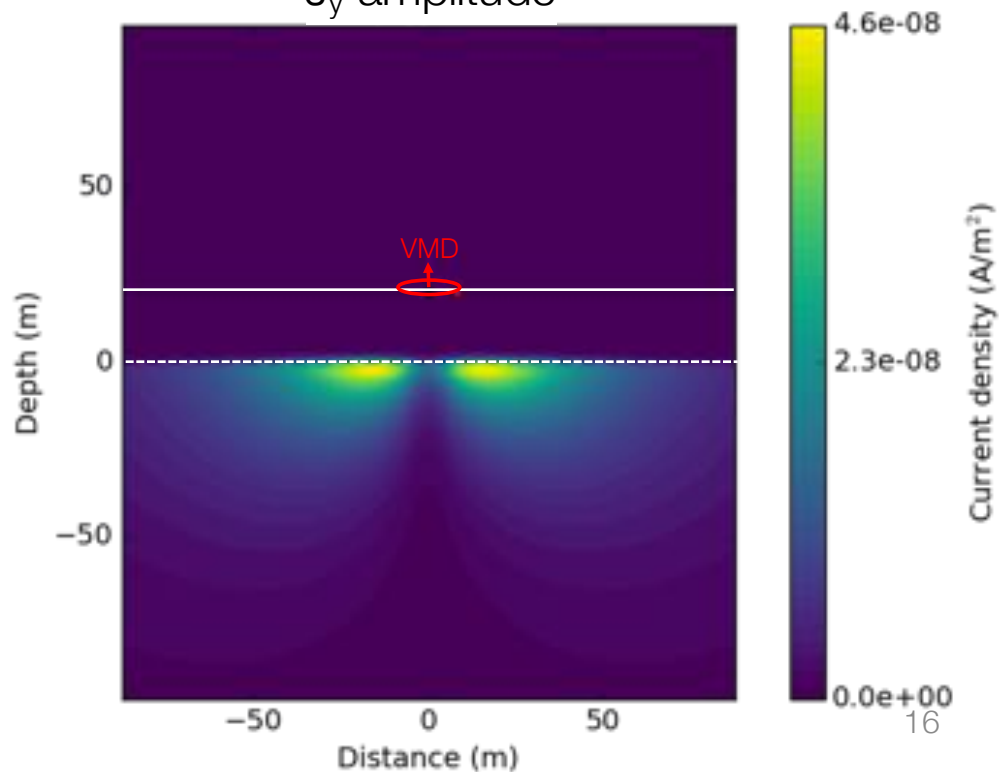

Secondary Magnetic Flux Density


- Frequency = 10 kHz

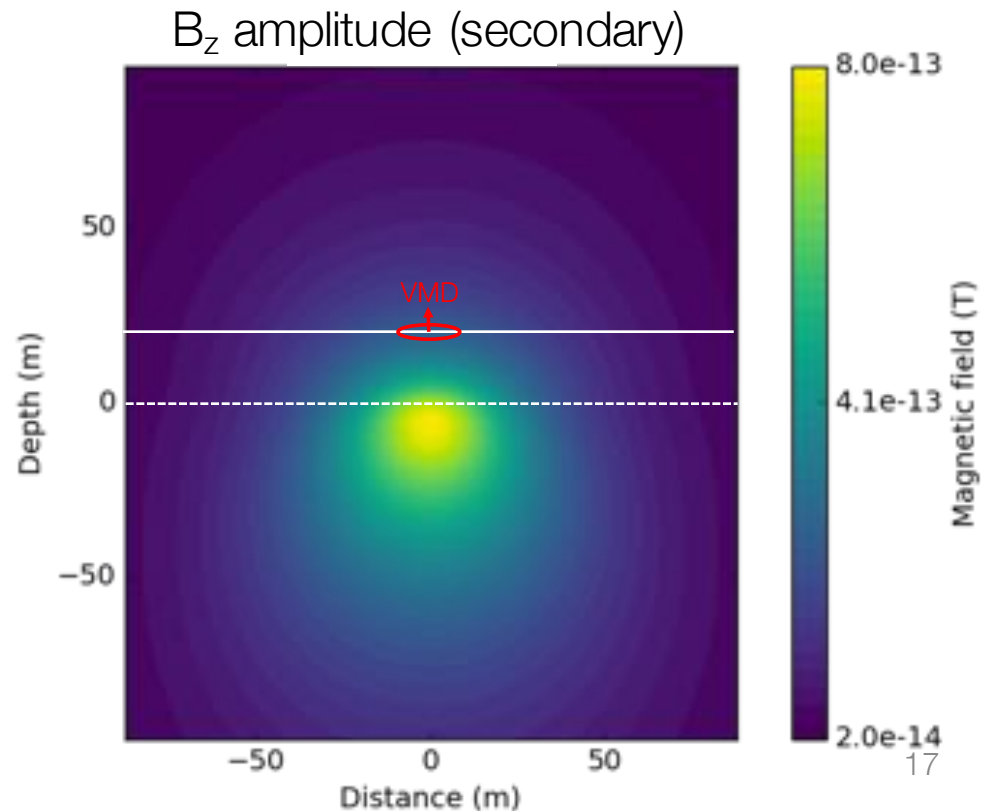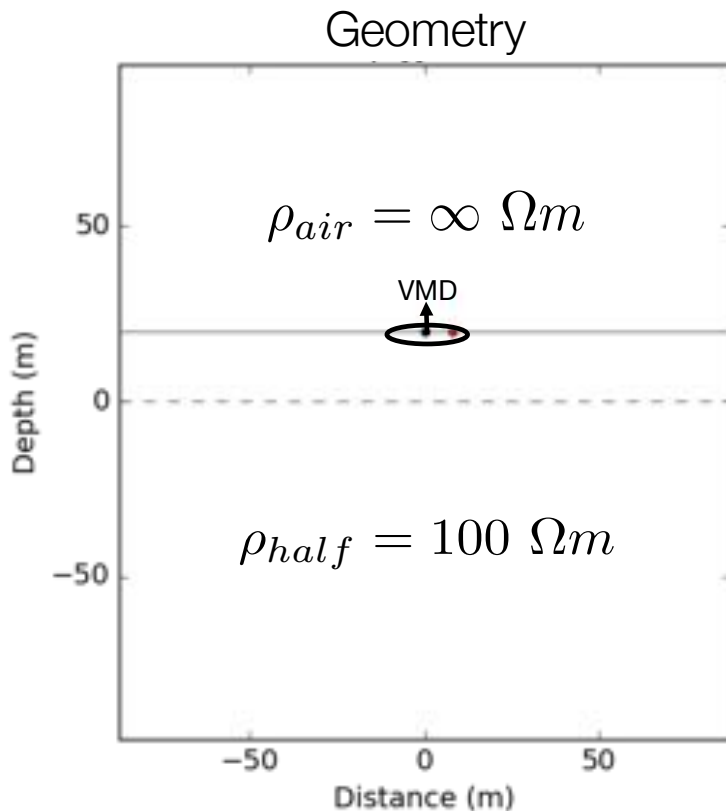

Effects of Frequency

- Frequency at 100 kHz
- Skin depth = 16 m
- Currents are concentrated at surface


$$\delta = 503 \sqrt{\frac{\rho}{f}}$$

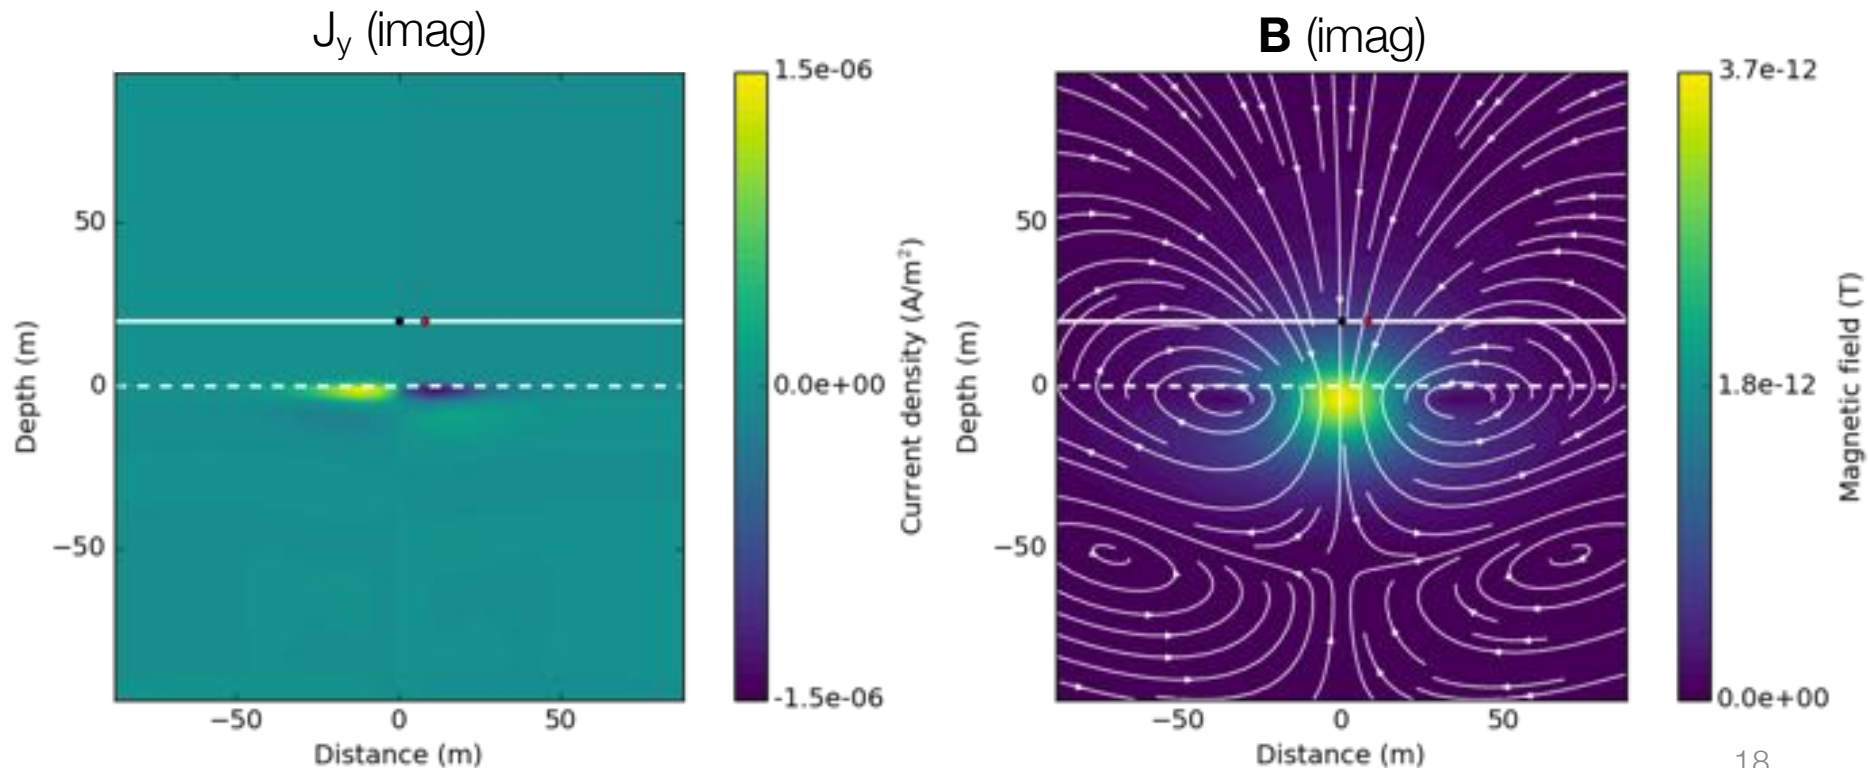

Effects of Frequency

- Frequency at 10 kHz
- Skin depth = 50 m
- Currents diffusing downward and outward


$$\delta = 503 \sqrt{\frac{\rho}{f}}$$

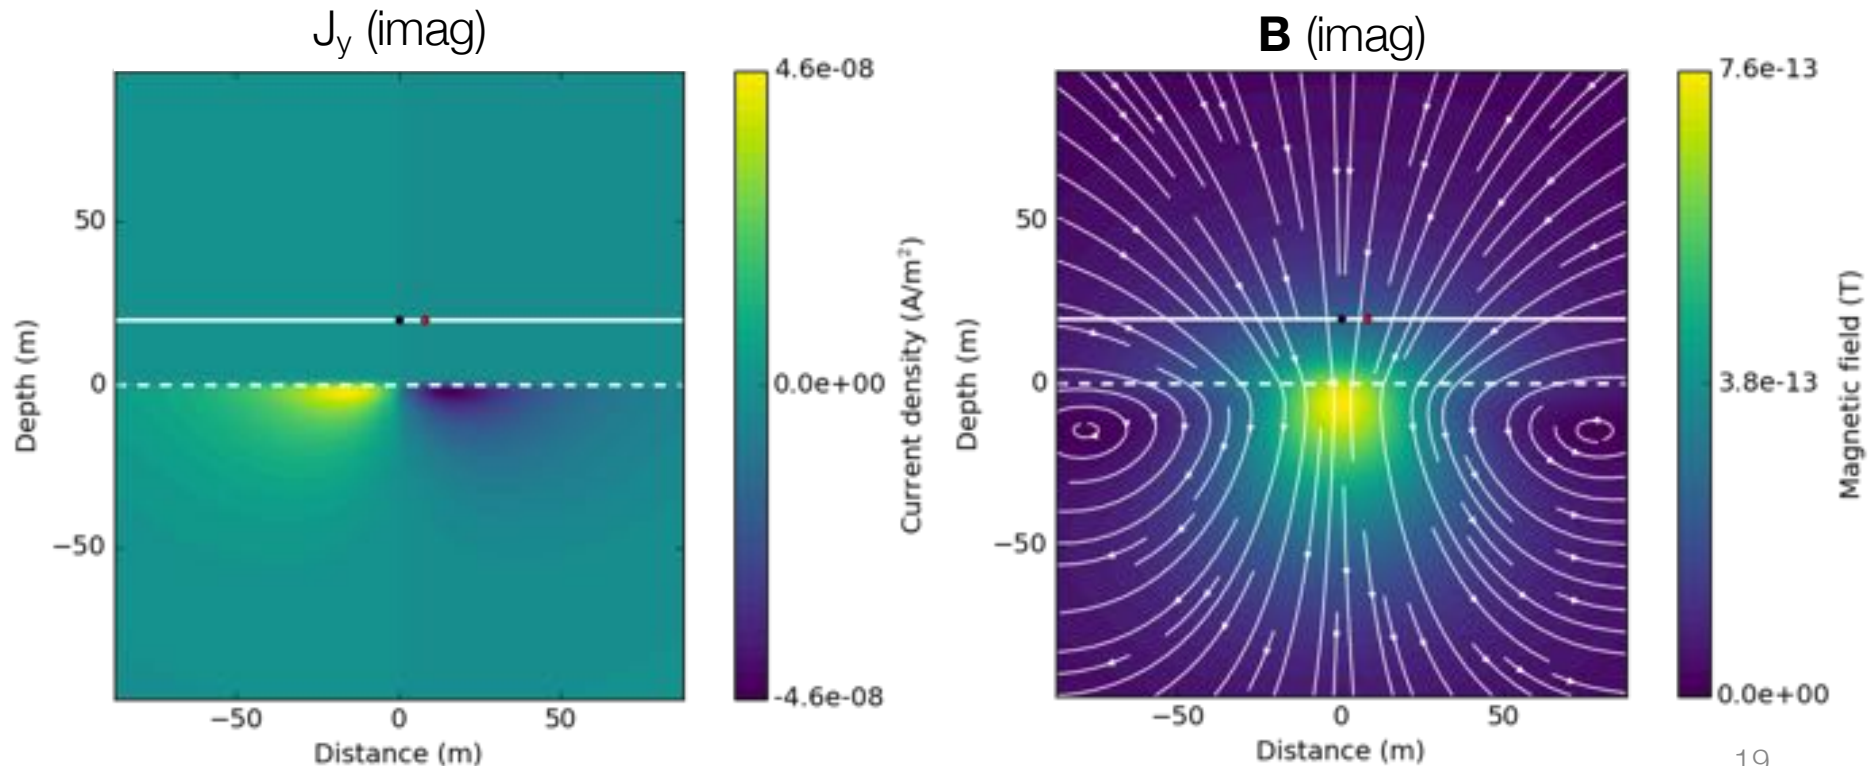


Summary: Effects of Frequency

$$\delta = 503 \sqrt{\frac{\rho}{f}}$$

J_y imag.

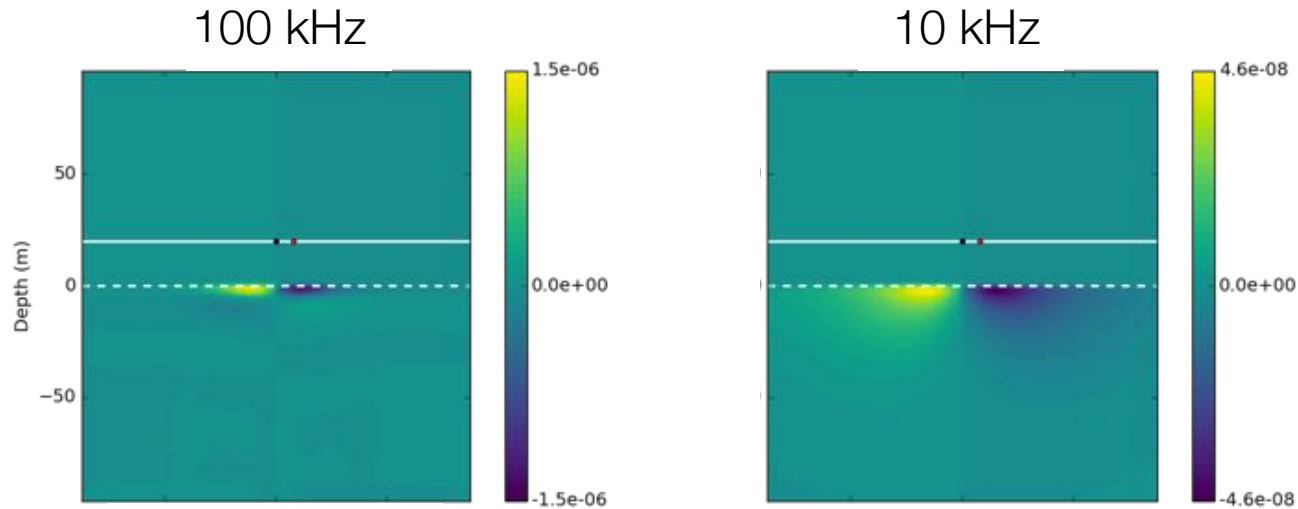


B imag.

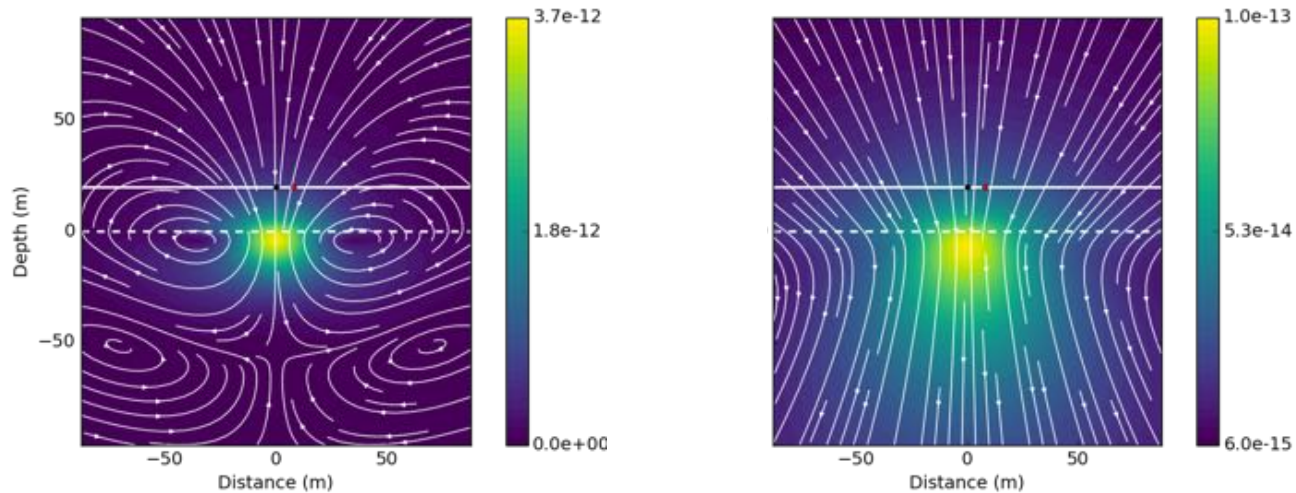


Layered earth

- 3 layers + air,
- ρ_2 varies

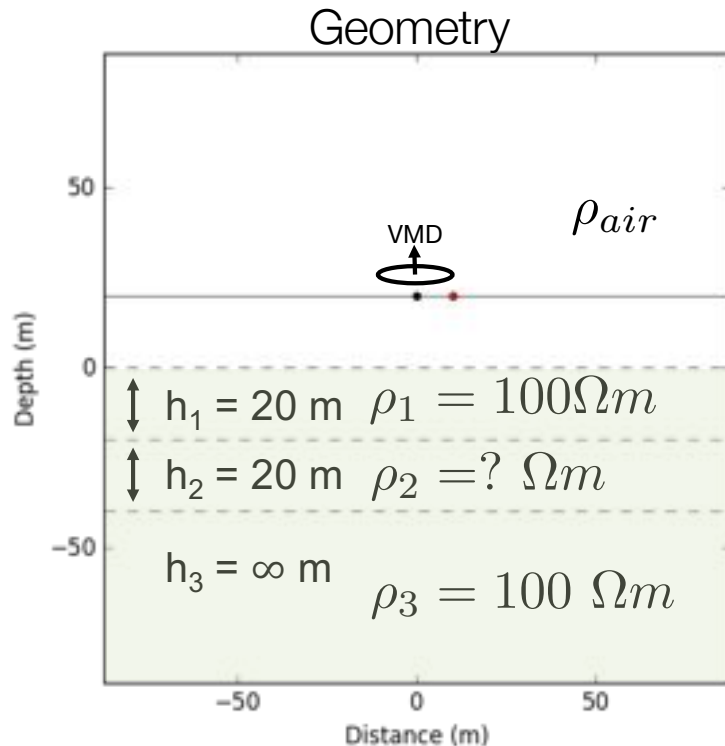


- Four different cases:
 - Halfspace
 $\rho_2 = 100 \Omega m$
 - Resistive
 $\rho_2 = 1000 \Omega m$
 - Conductive
 $\rho_2 = 10 \Omega m$
 - Very conductive
 $\rho_2 = 1 \Omega m$
- Fields
 - J_y imag
 - Secondary **B** imag

Current density (J_y imag)

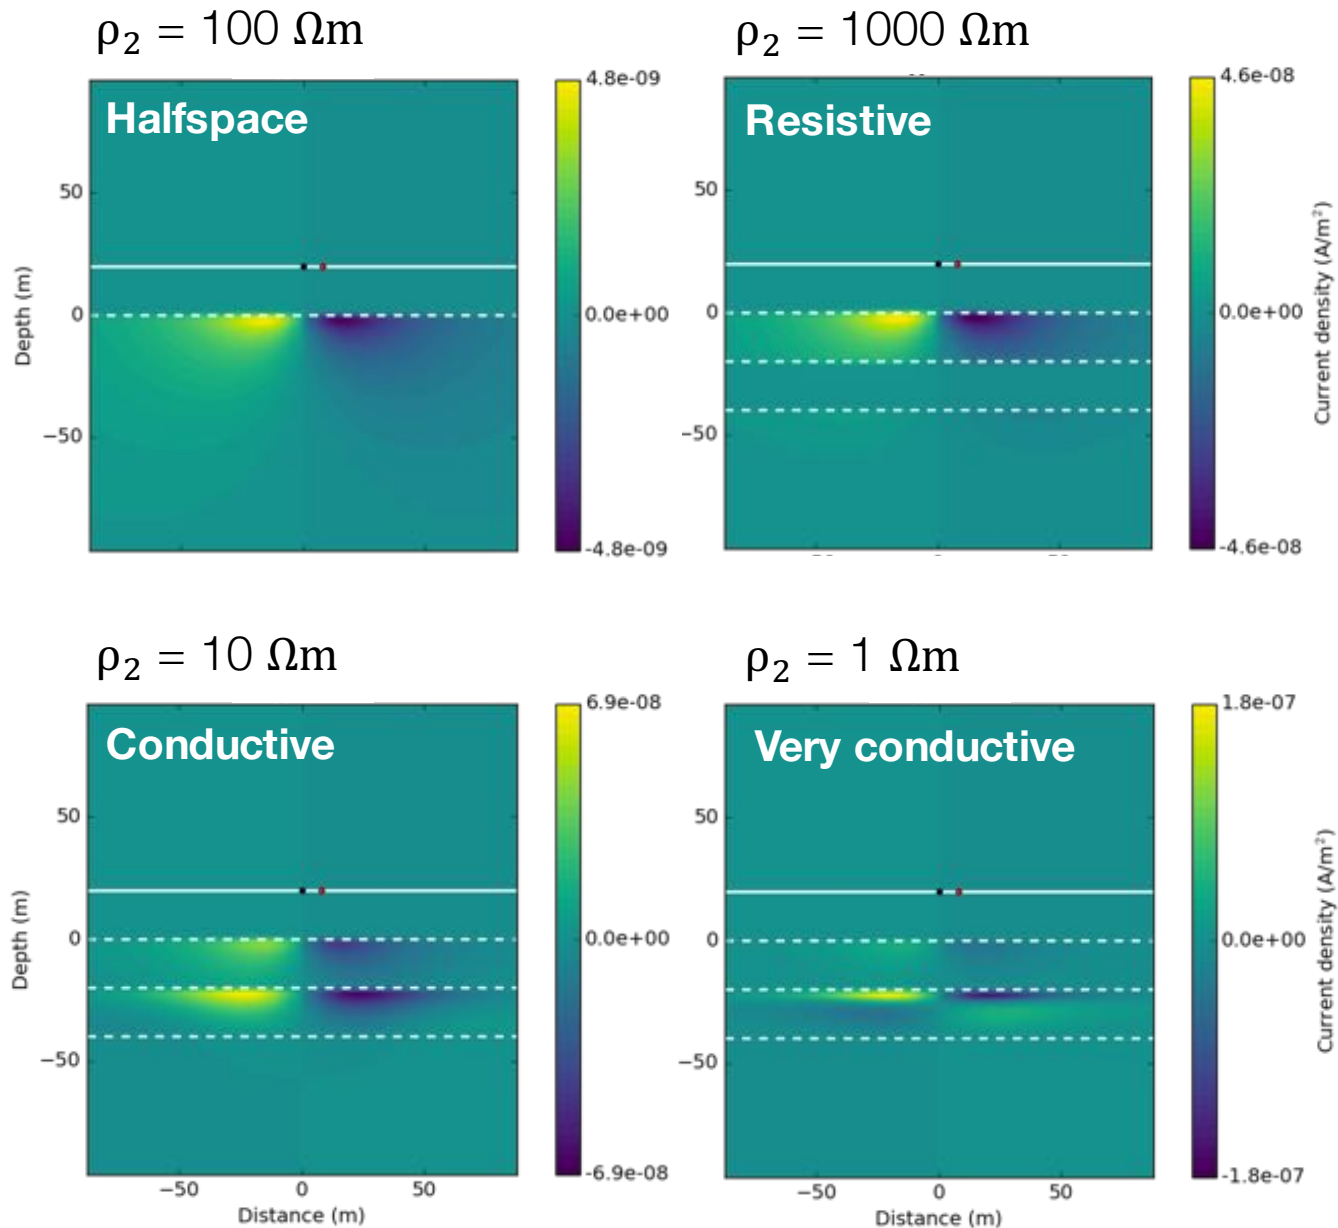


Magnetic flux density (**B** imag)


$$\rho_2 = 100 \, \Omega\text{m}$$

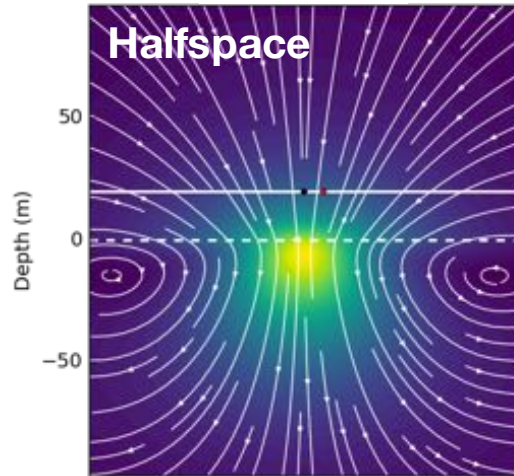



$$\rho_2 = 1000 \, \Omega\text{m}$$

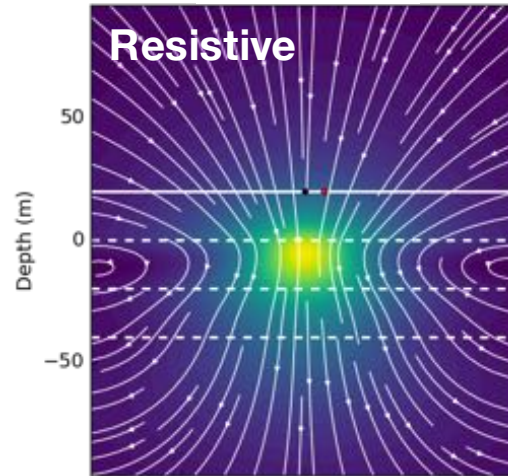





$$\rho_2 = 10 \, \Omega\text{m}$$

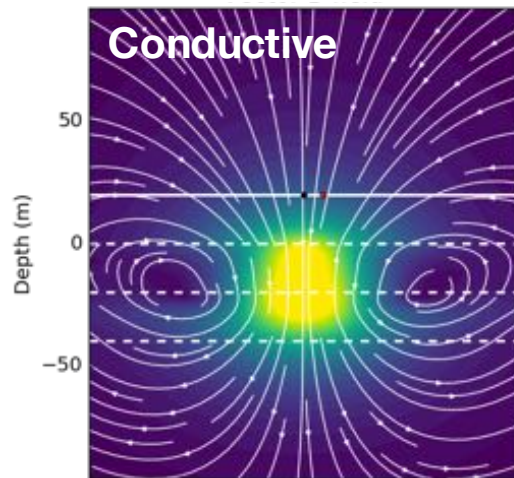


$$\rho_2 = 1 \, \Omega\text{m}$$

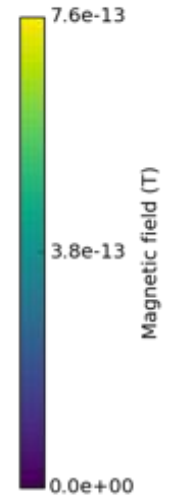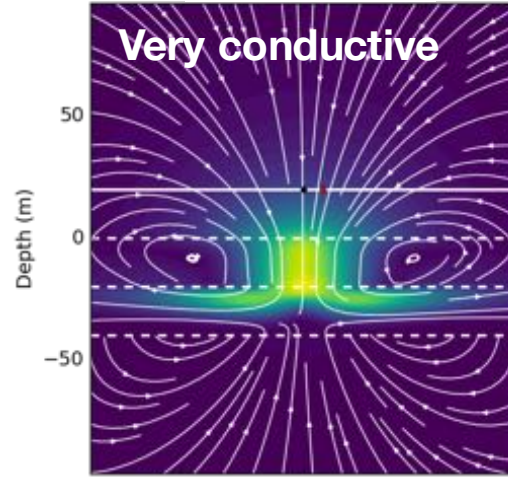

B_z sounding curves

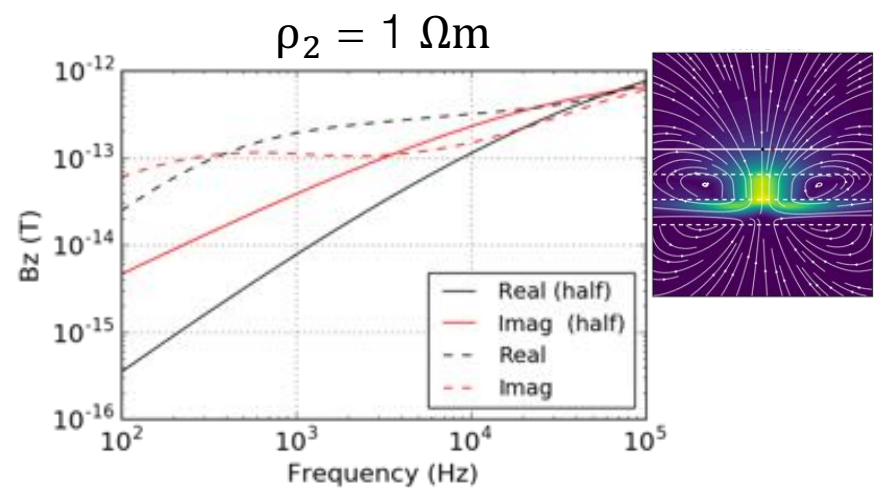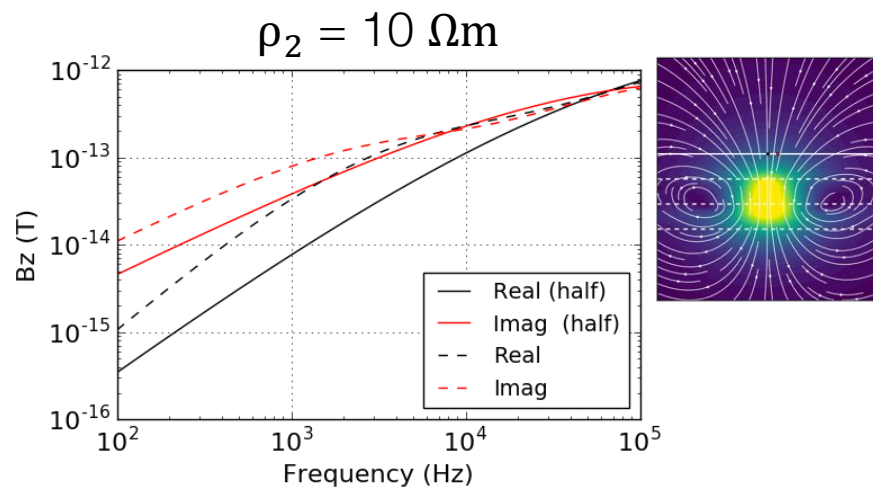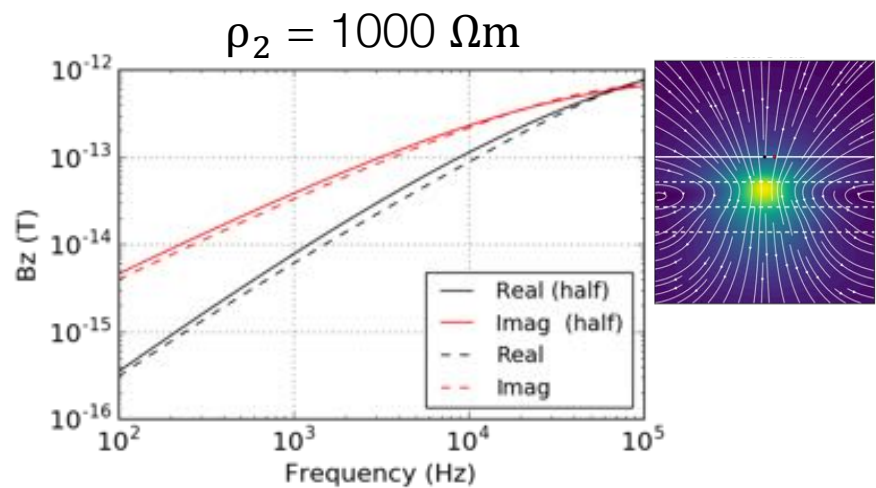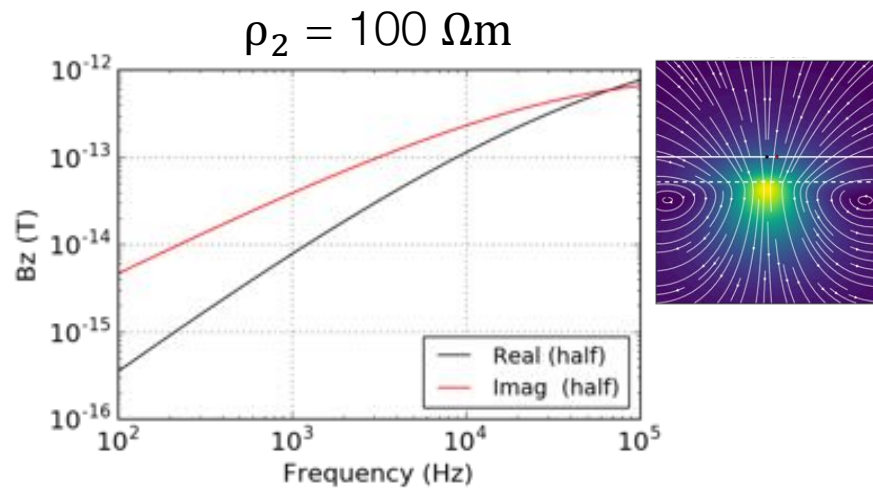


Back to the “shielding” problem

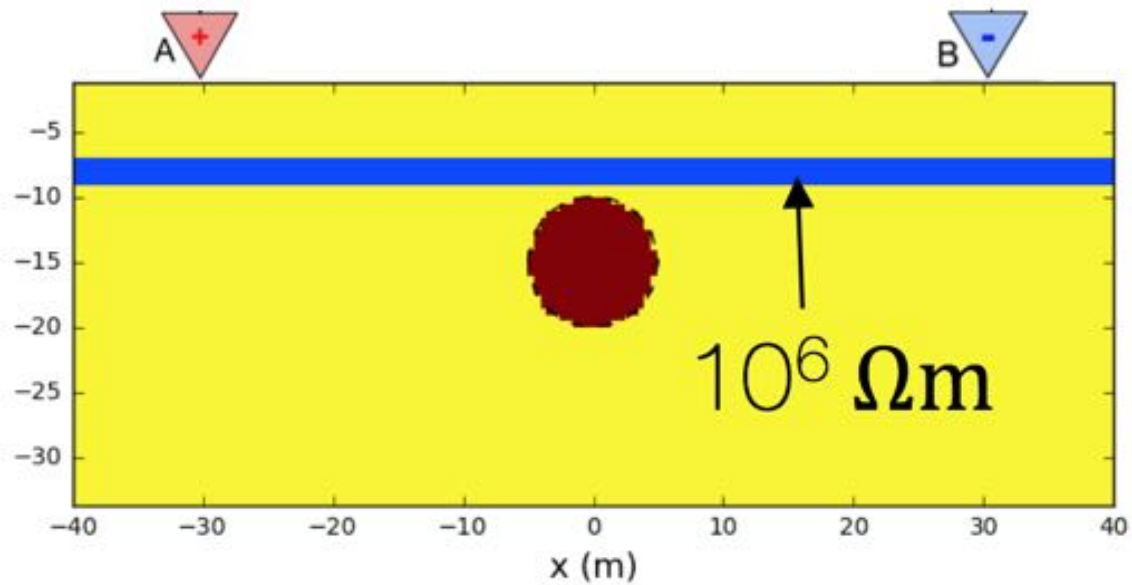


Shielding: DC with resistive layer

Resistivity models (thin **resistive** layer)

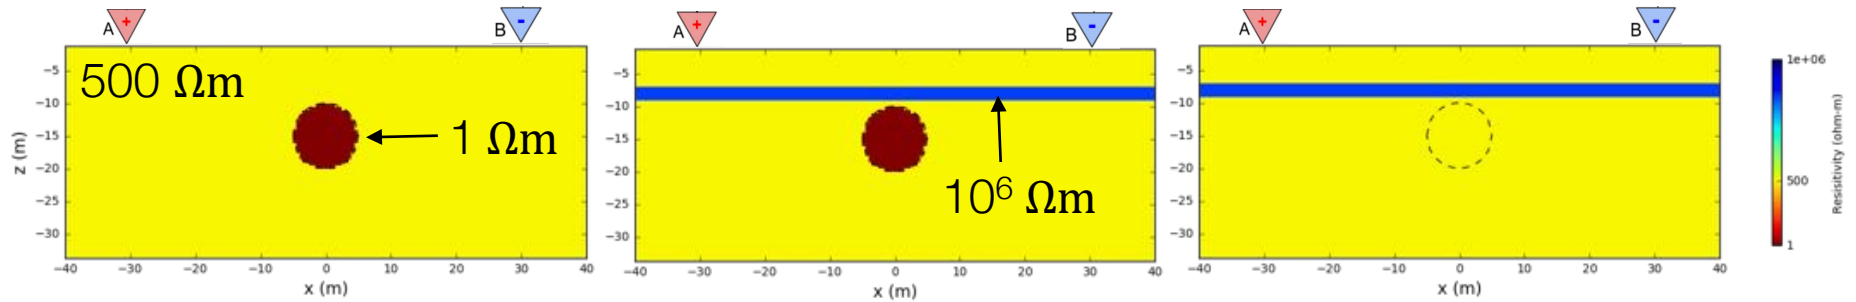


Currents and measured data at MN

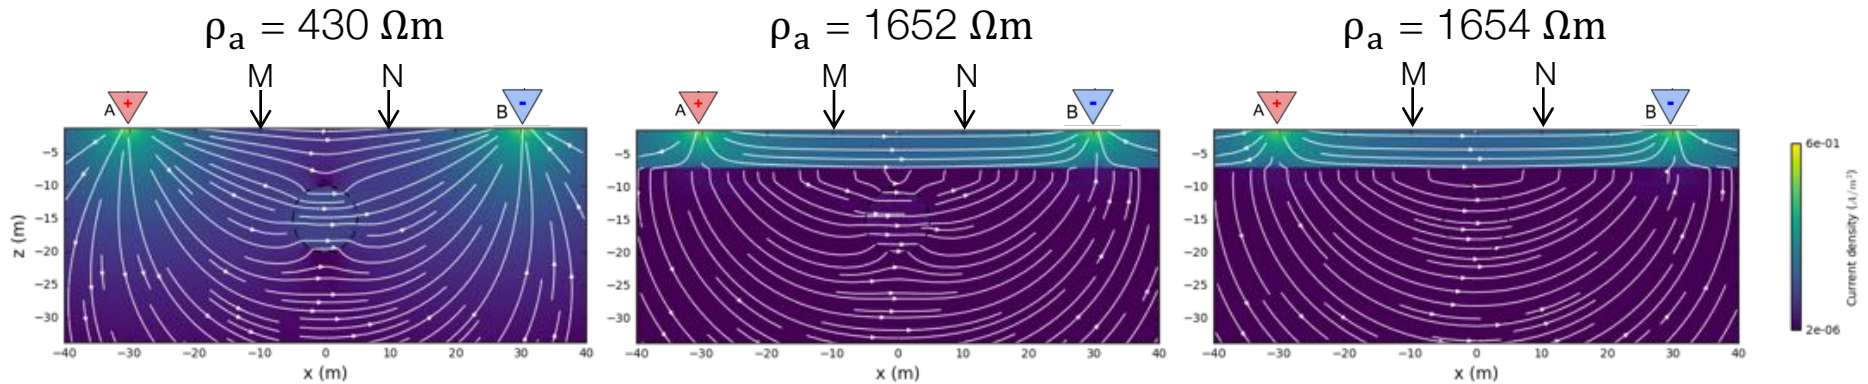


Shielding: EM with resistive layer

Resistivity models (thin **resistive** layer)

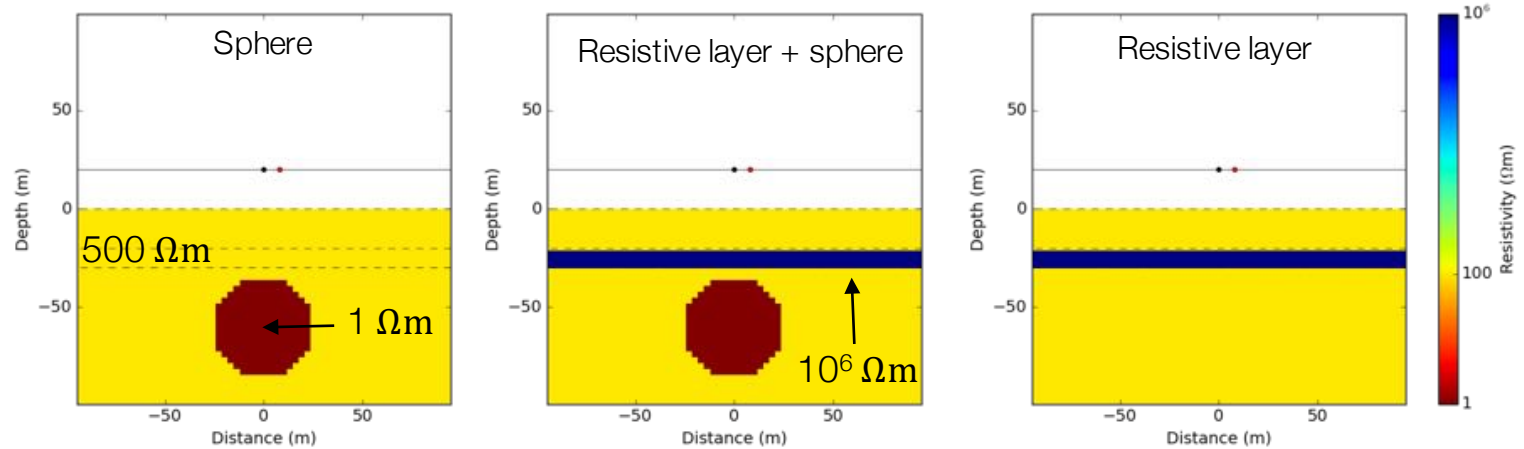


Currents (J_y imag)

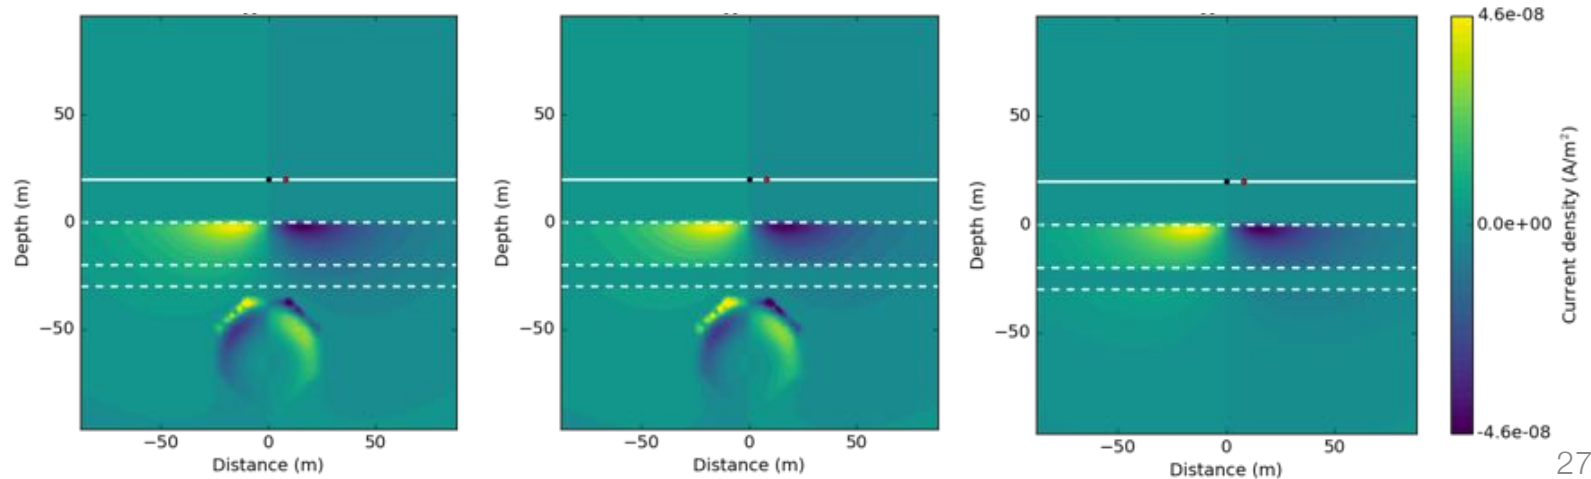


Shielding: EM with resistive layer


Resistivity models (thin **resistive** layer)

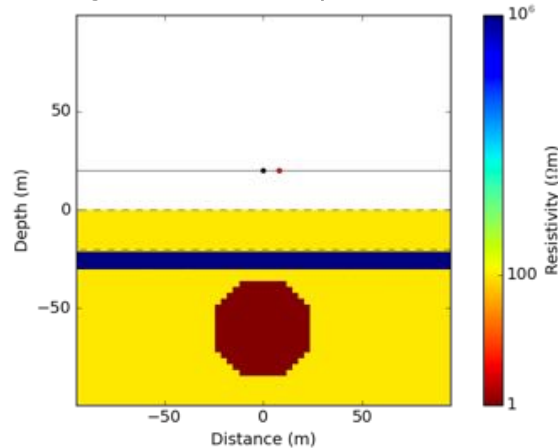

B_z sounding curves

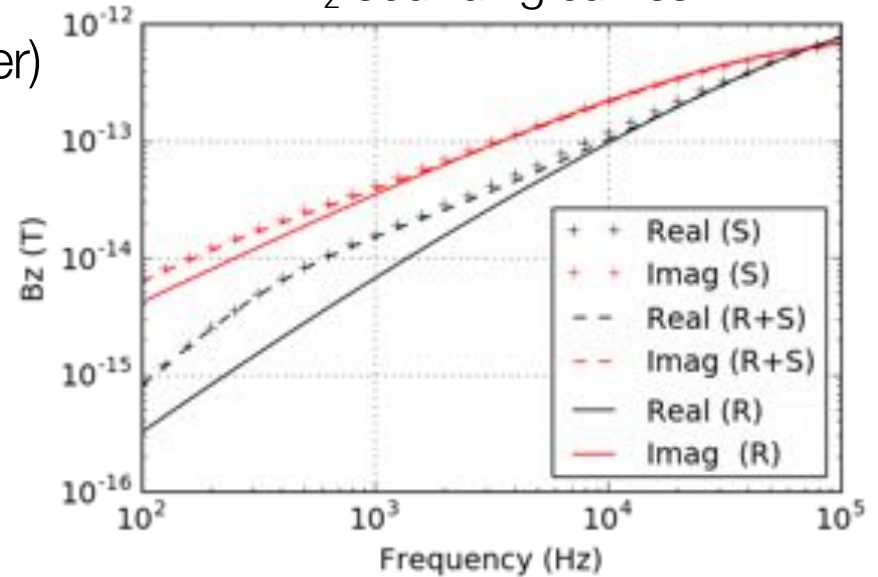


Currents (J_y imag)

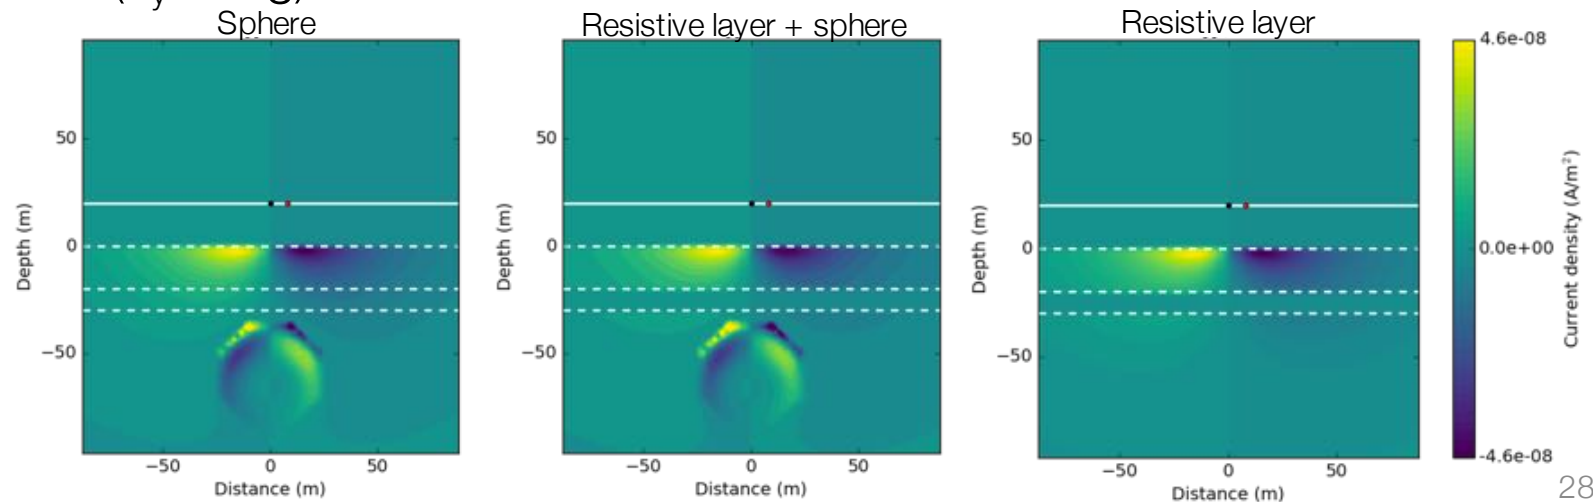


Shielding: DC with conductive layer

Resistivity models (thin **conductive** layer)

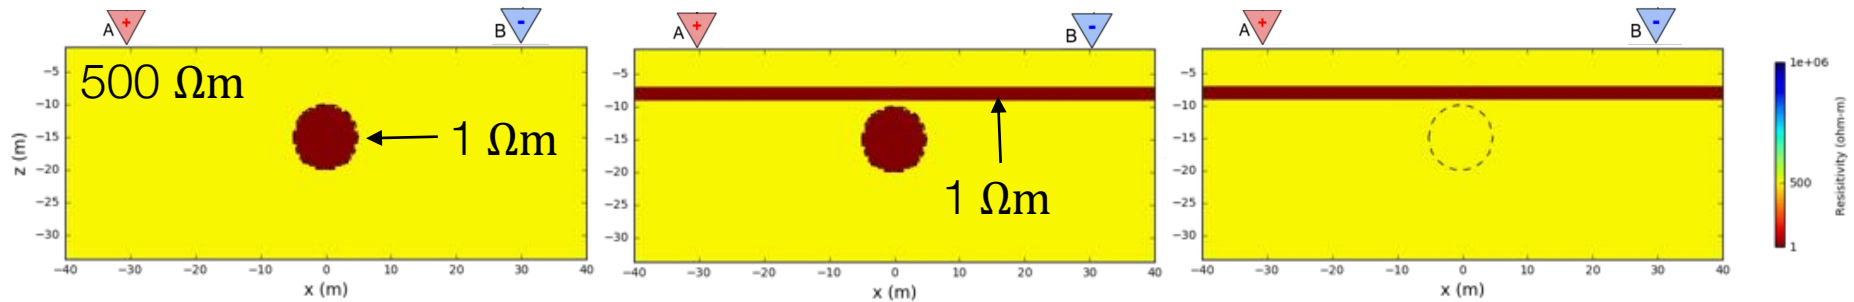


Currents and measured data at MN

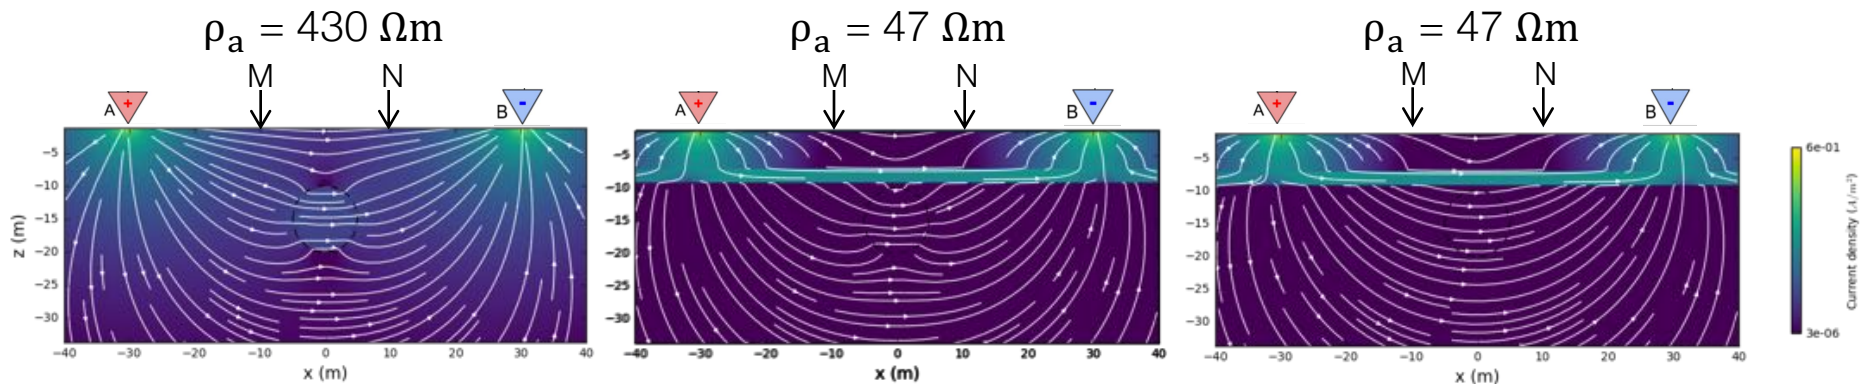


Shielding: EM with conductive layer


Conductivity models (thin **resistive** layer)

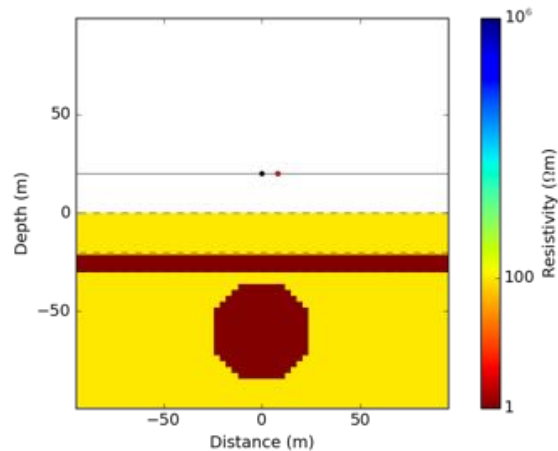

B_z sounding curves

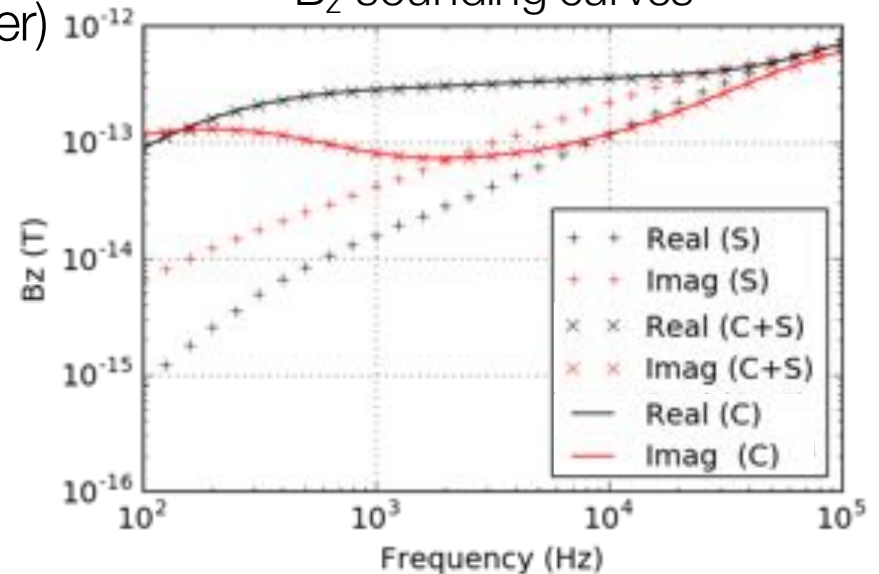

Currents (J_y imag)

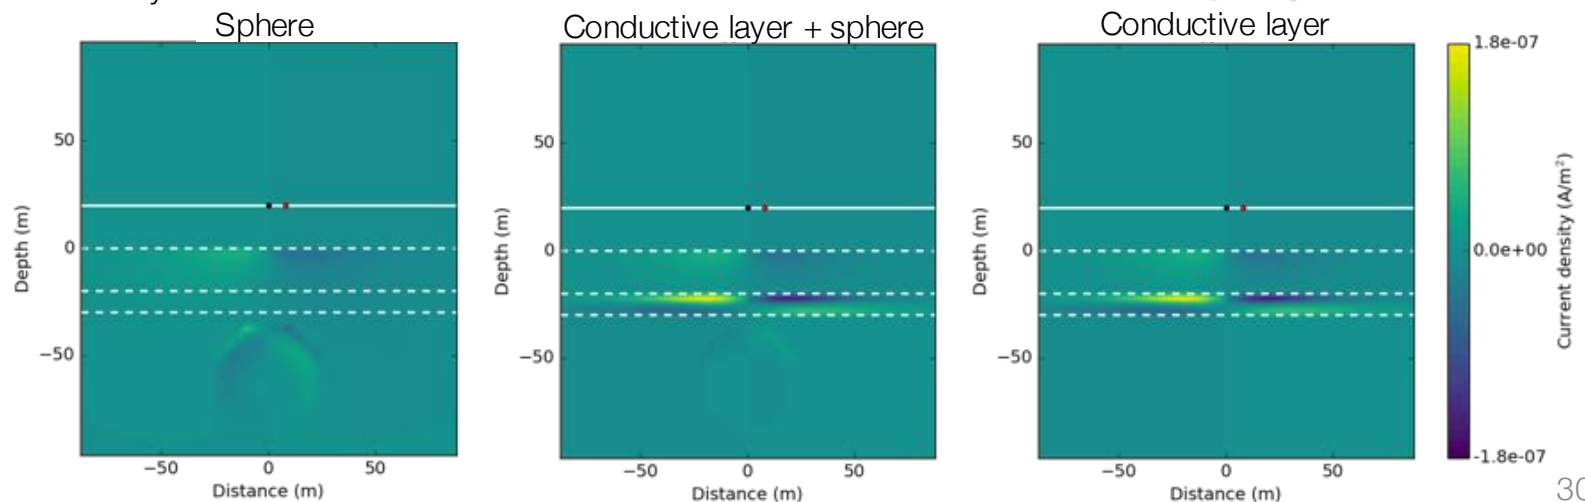

Outline

Setup

- Basic experiment
- Transmitters, Receivers

Frequency Domain EM

- Vertical Magnetic Dipole
- Effects of Frequency
- Questions
- Case History – Groundwater

Time Domain EM

- Vertical Magnetic Dipole
- Propagation with Time
- Case History – Oil and gas



Case History: Bookpurnong

Viezzoli et al., 2009

Setup

Geoscience Australia project

- Characterizing river salination

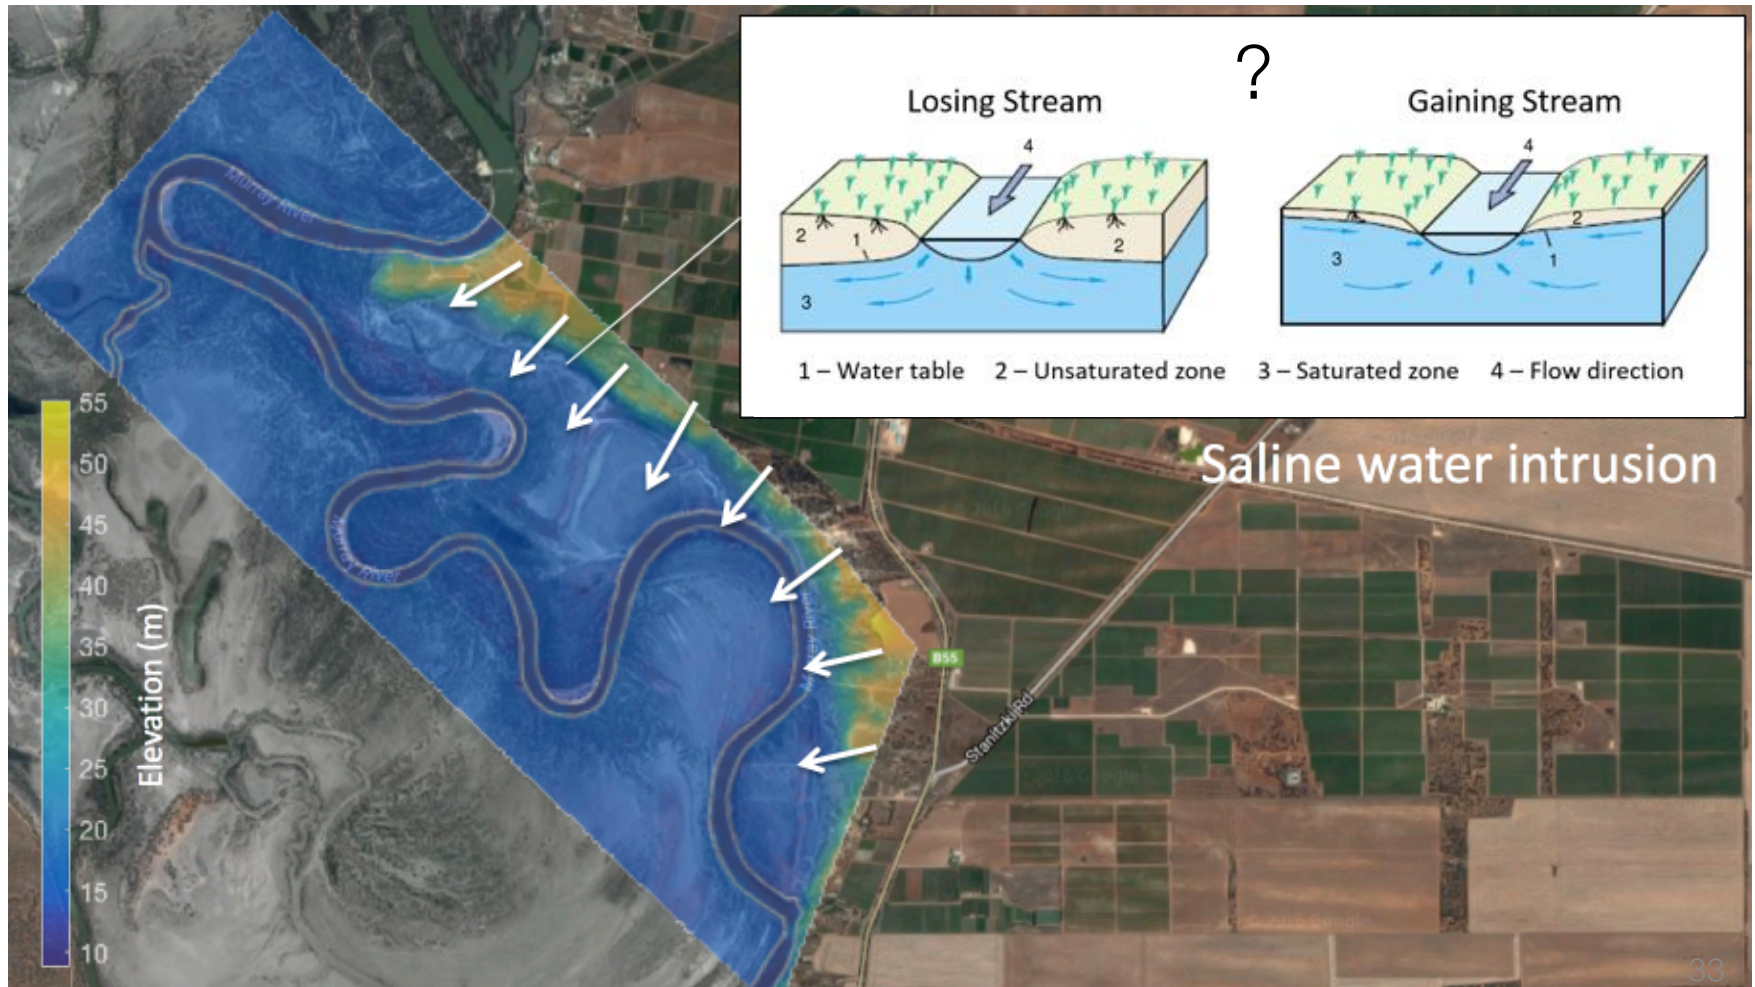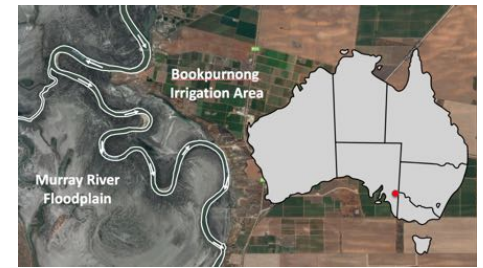


Properties

Location map for salinity measurements




Unit	Conductivity
Saline water	High, 3 - 5 S/m
Fresh water	Low, 0.01 S/m

Conductivity from salinity measurements

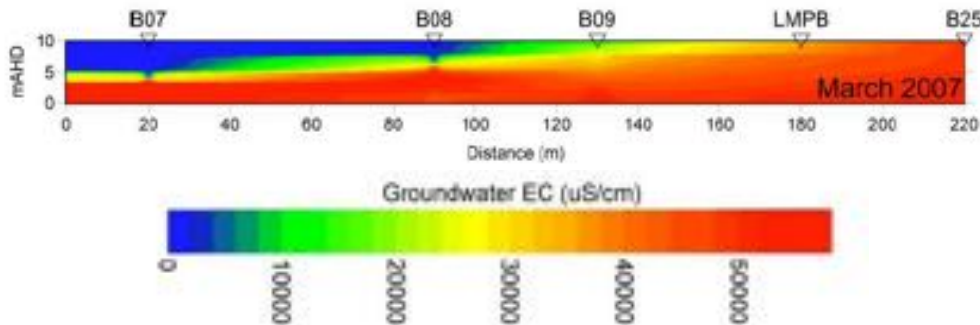


Survey

Resolve system (2008)

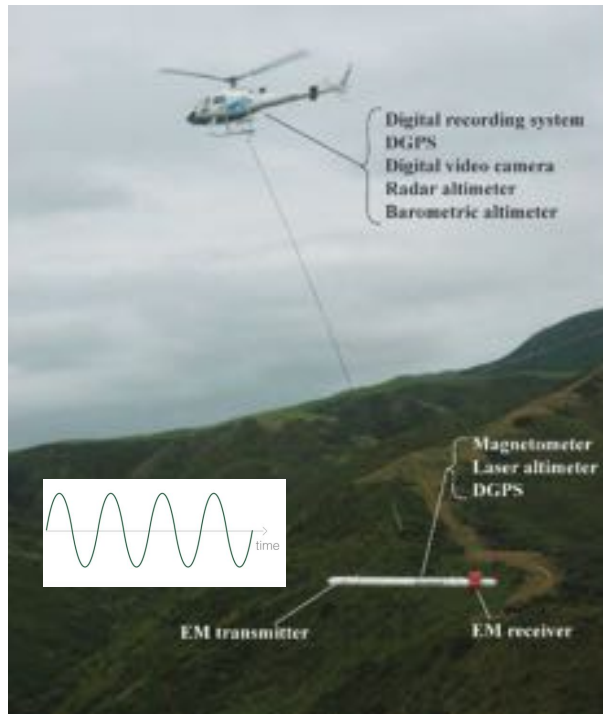

Flight lines

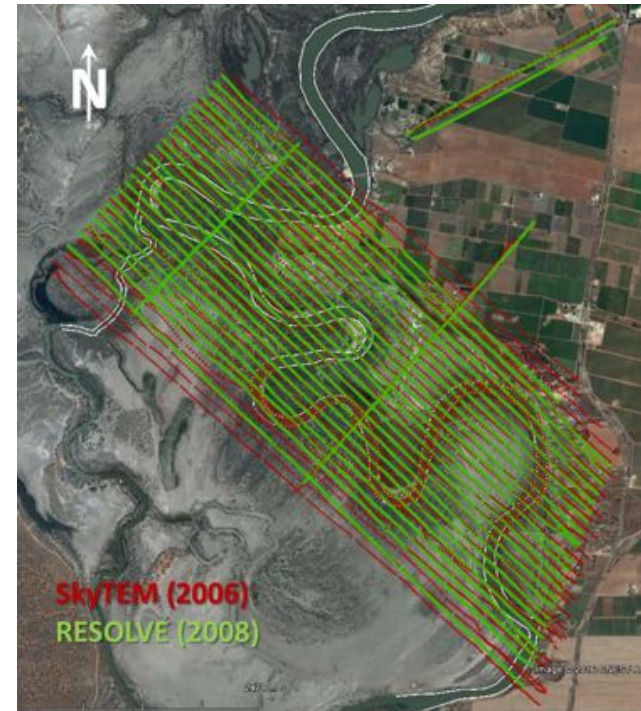

Horizontal Co-planar (HCP) frequencies:

- 382, 1822, 7970, 35920 and 130100 Hz


Vertical Co-axial (VCA) frequencies:

- 3258 Hz

Horizontal Co-planar



Vertical Co-axial





Horizontal Co-planar (HCP) data


In-Phase (Real)

Quadrature (Imaginary)



382 Hz

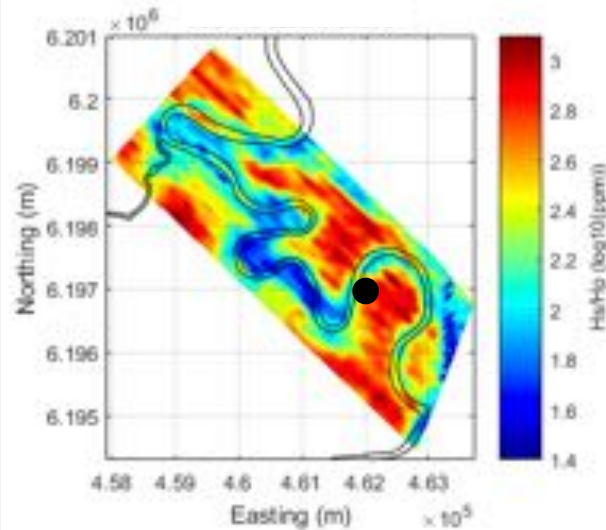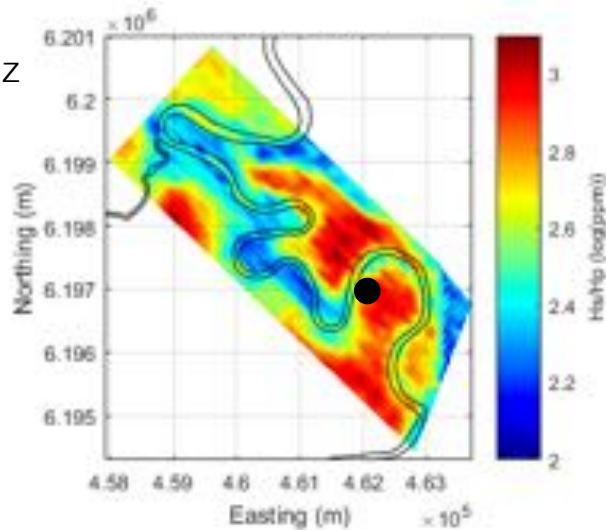


Sounding curve

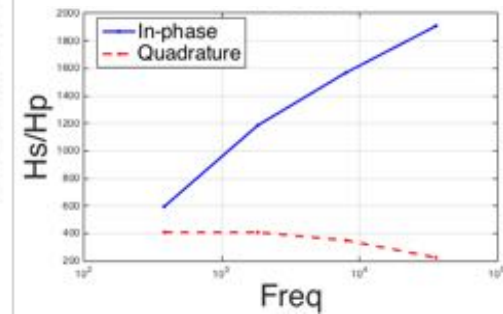

35920 Hz

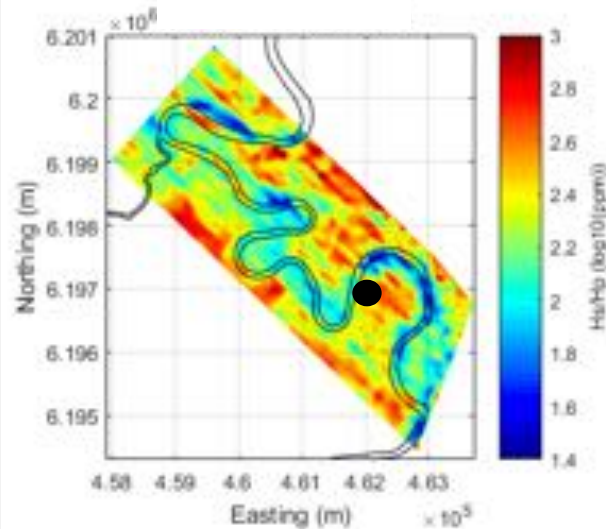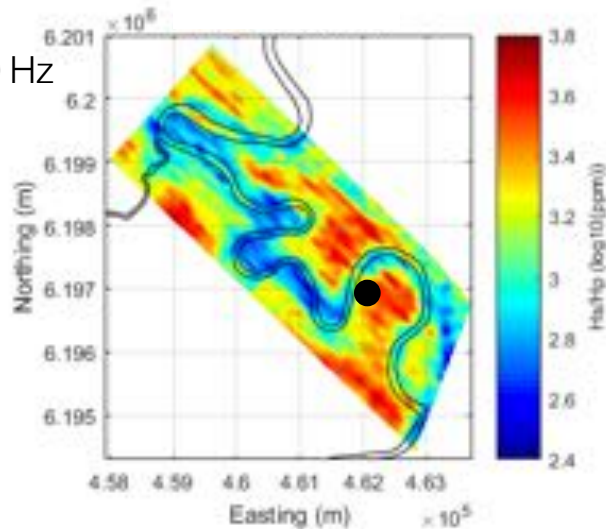


Response curve

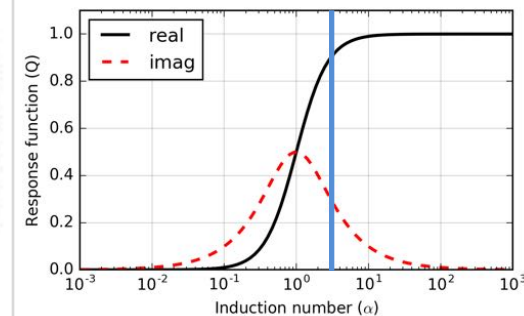


Processing: 1D inversion


Data

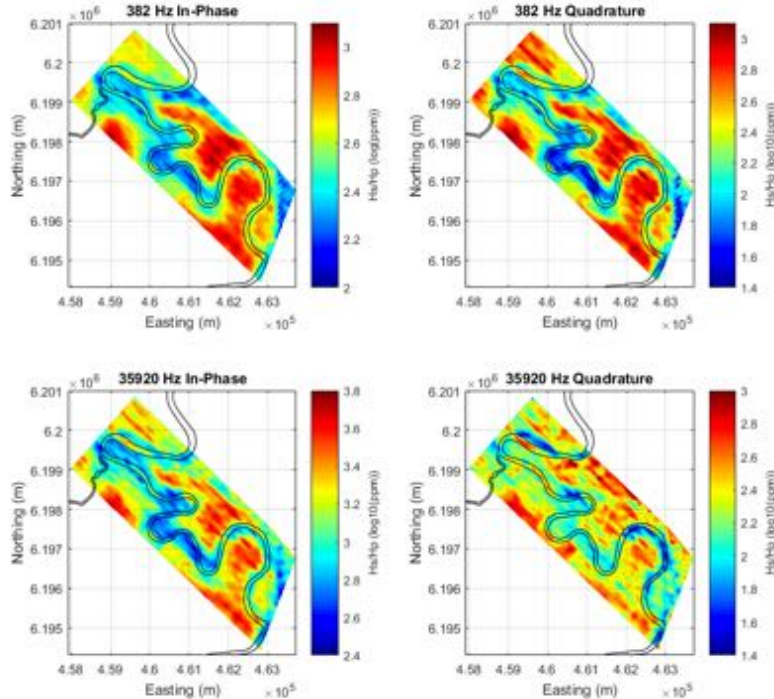

Data fit

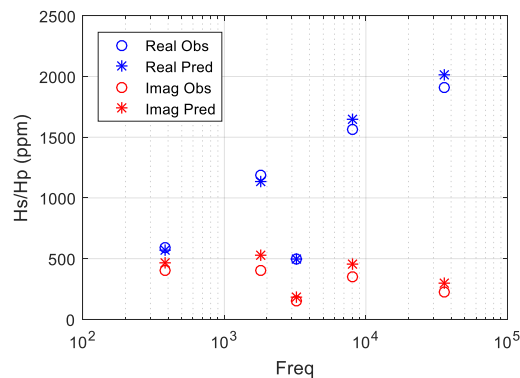


Conductivity model (stitched)

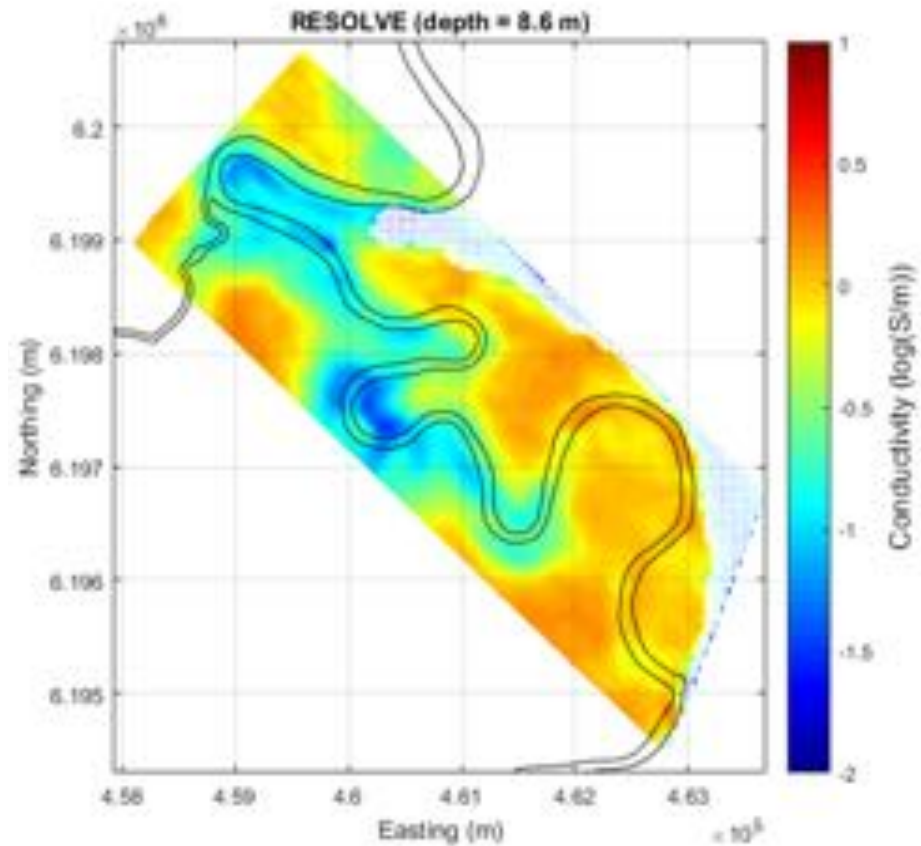


Interpretation


Conductivity model (stitched)

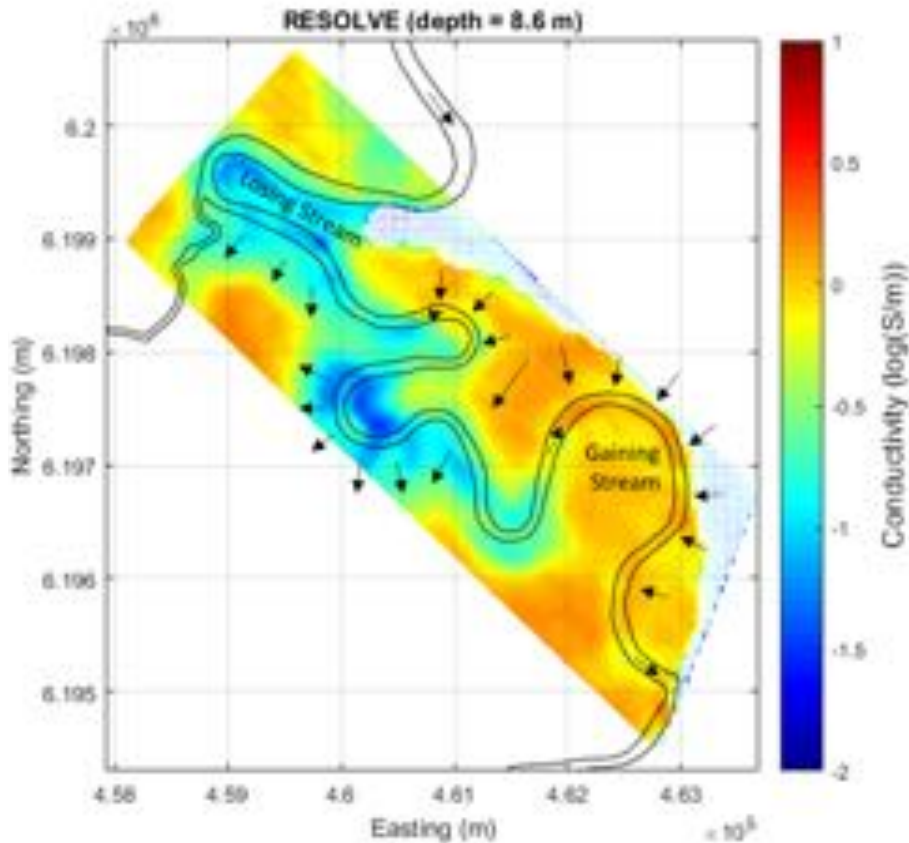

Losing Stream

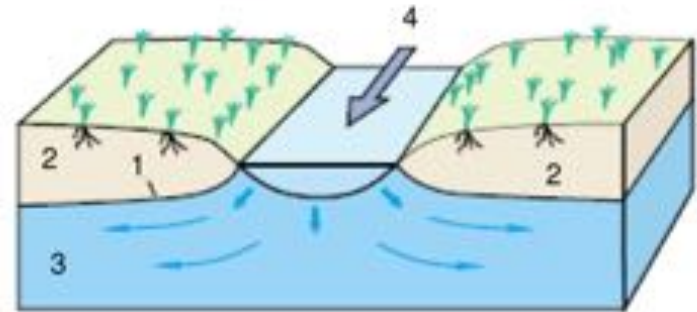


Gaining Stream

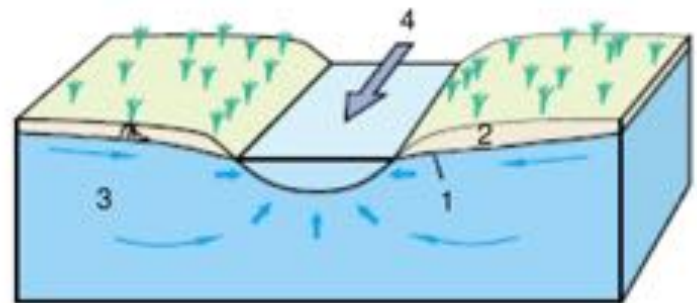


- 1 – Water table 2 – Unsaturated zone
3 – Saturated zone 4 – Flow direction

Synthesis

Hydrological model

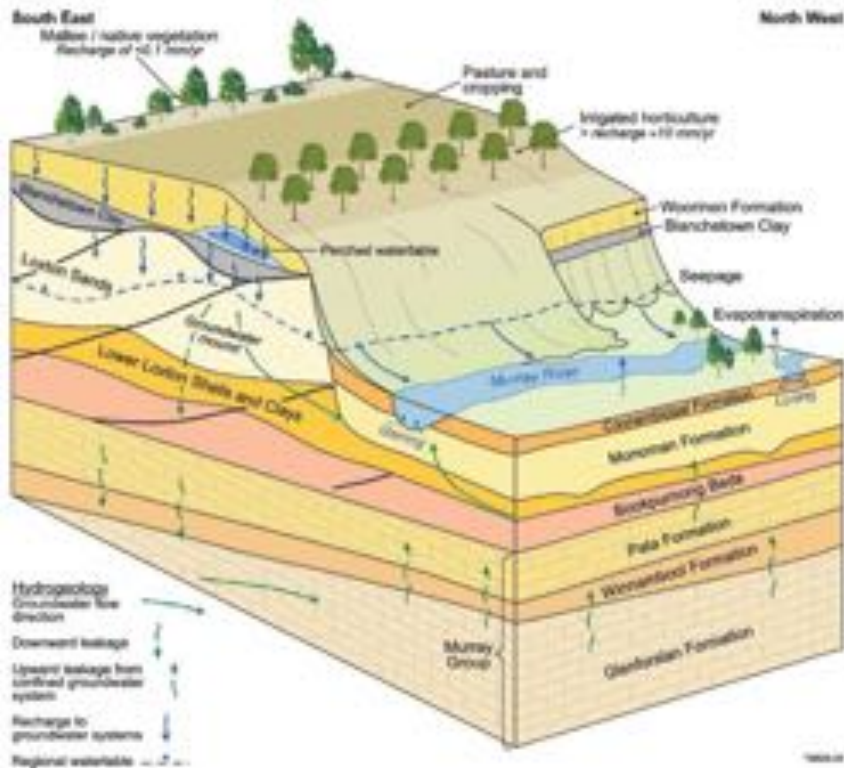

Conductivity model (stitched)

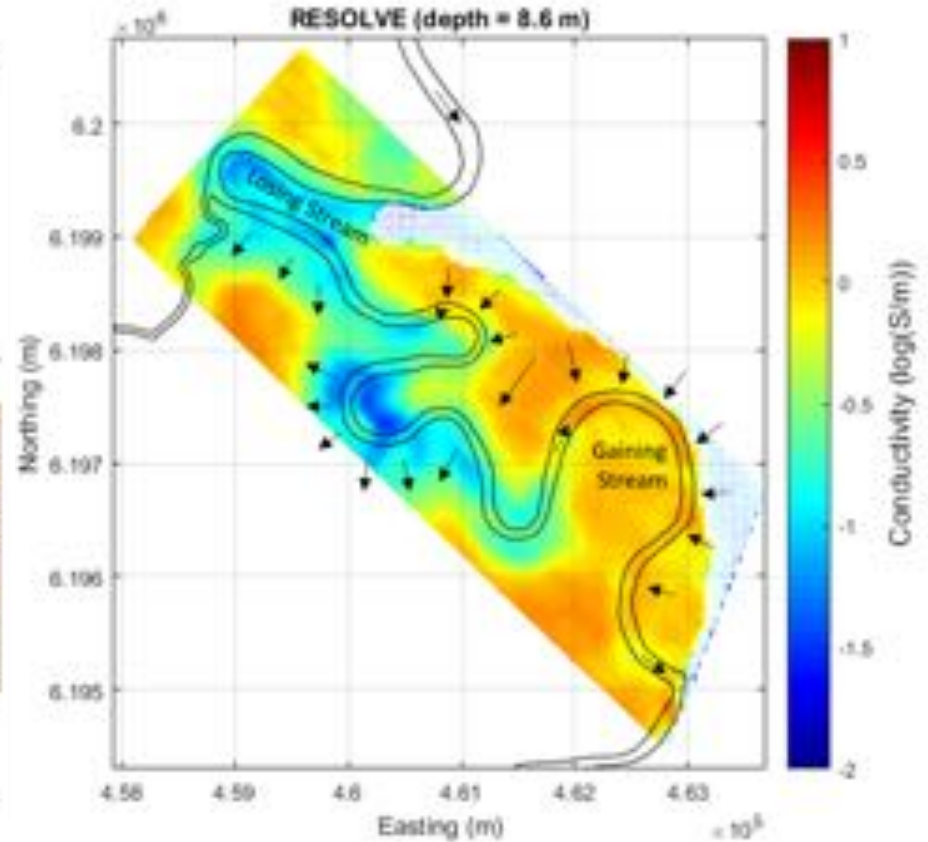

Outline

Setup

- Basic experiment
- Transmitters, Receivers

Frequency Domain EM

- Vertical Magnetic Dipole
- Effects of Frequency
- Case History – Ground water

Time Domain EM


- Vertical Magnetic Dipole
- Propagation with Time
- Case History – Oil and gas

EM with Inductive Sources



- Induction principles are the same for
 - FDEM: Frequency domain EM
 - TDEM: Time domain EM

Transmitter current



FDEM

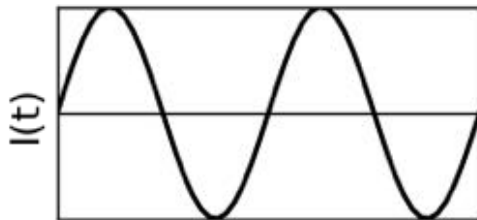

TDEM

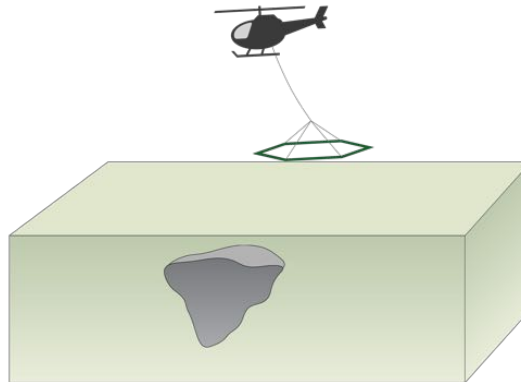
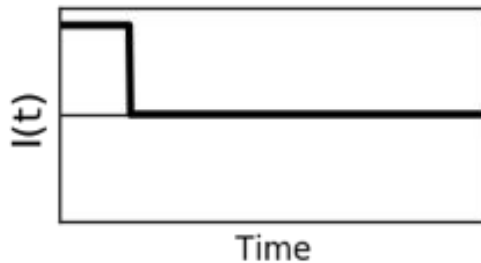


Receiver

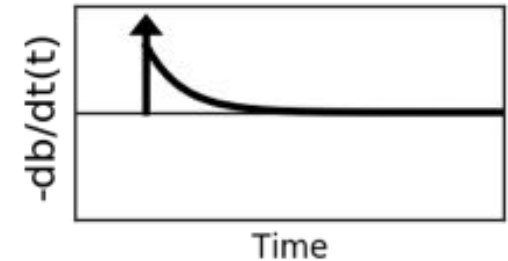
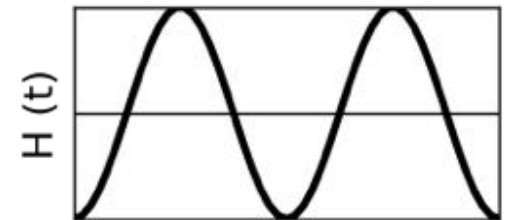


EM with Inductive Sources: Time Domain

Transmitter current

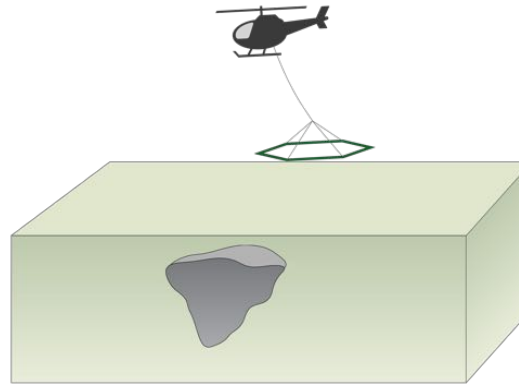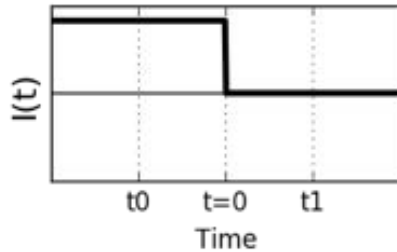


Receiver

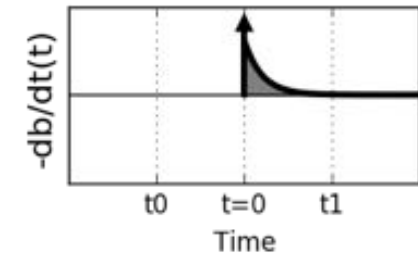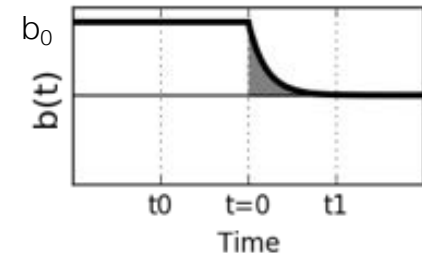

time	b	db/dt
$t < 0$	b_0	0
$t = 0$	b_0	$-b_0\delta(t)$
$t > 0$	secondary	secondary




$\delta(t)$: Dirac-delta function

Vertical Magnetic Dipole over a halfspace (TDEM)

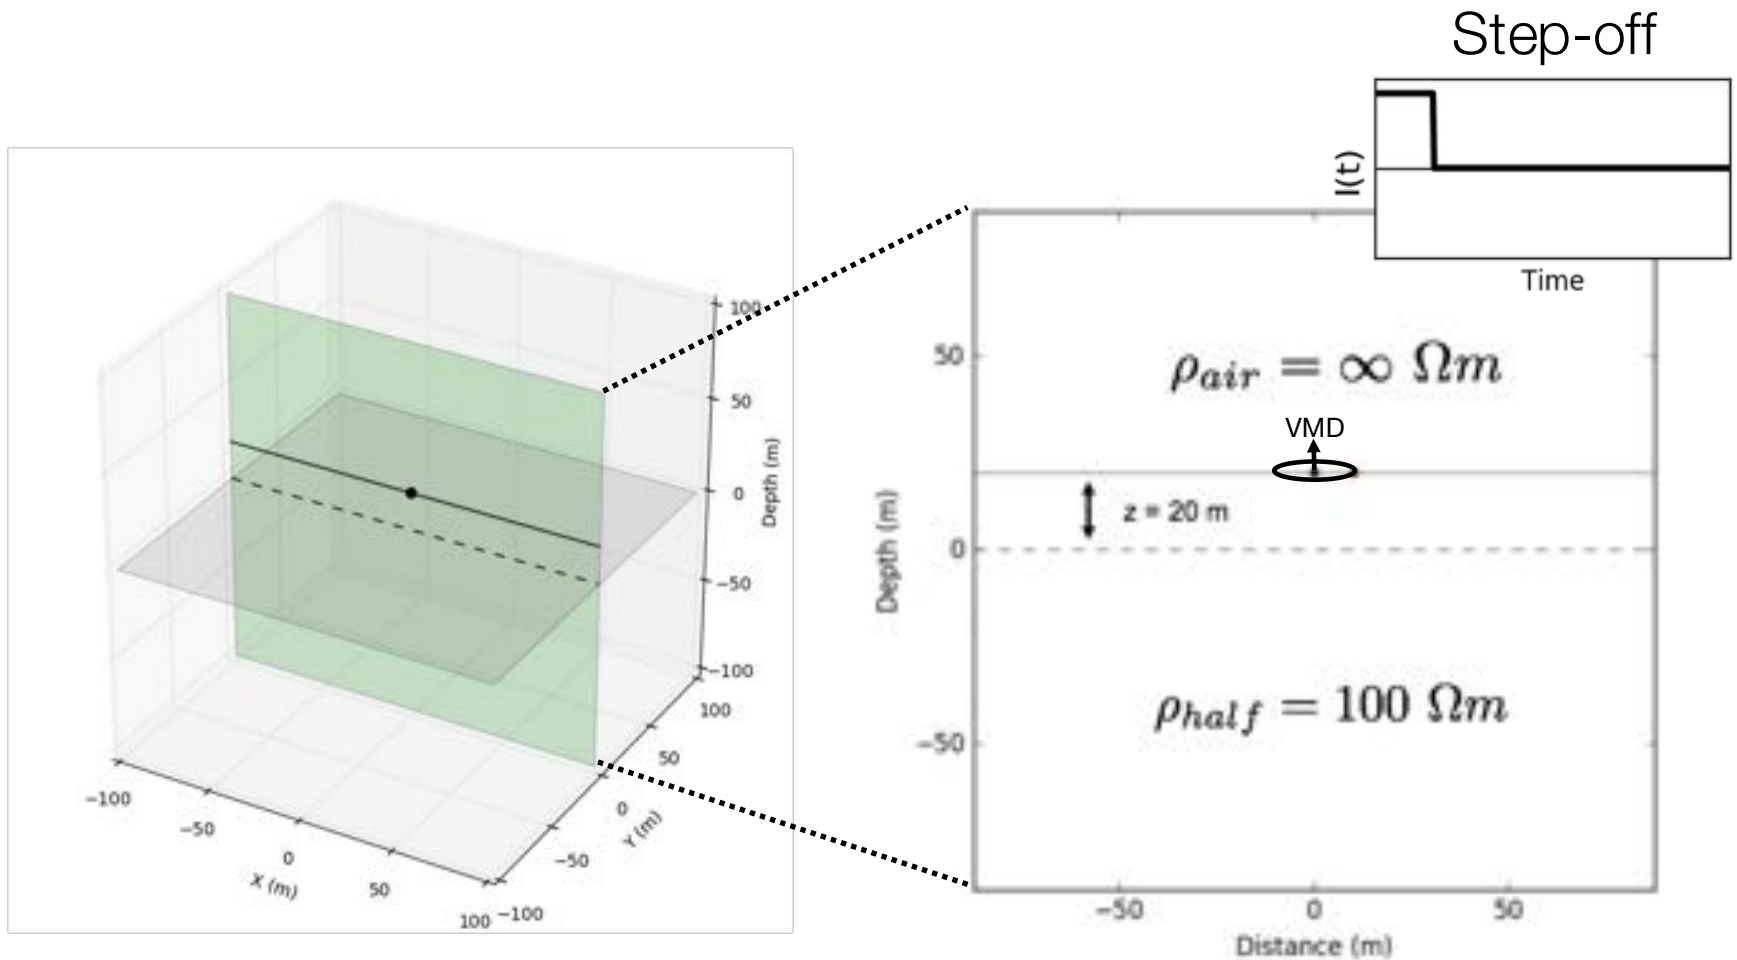



Current Density

- Time: 0.01ms

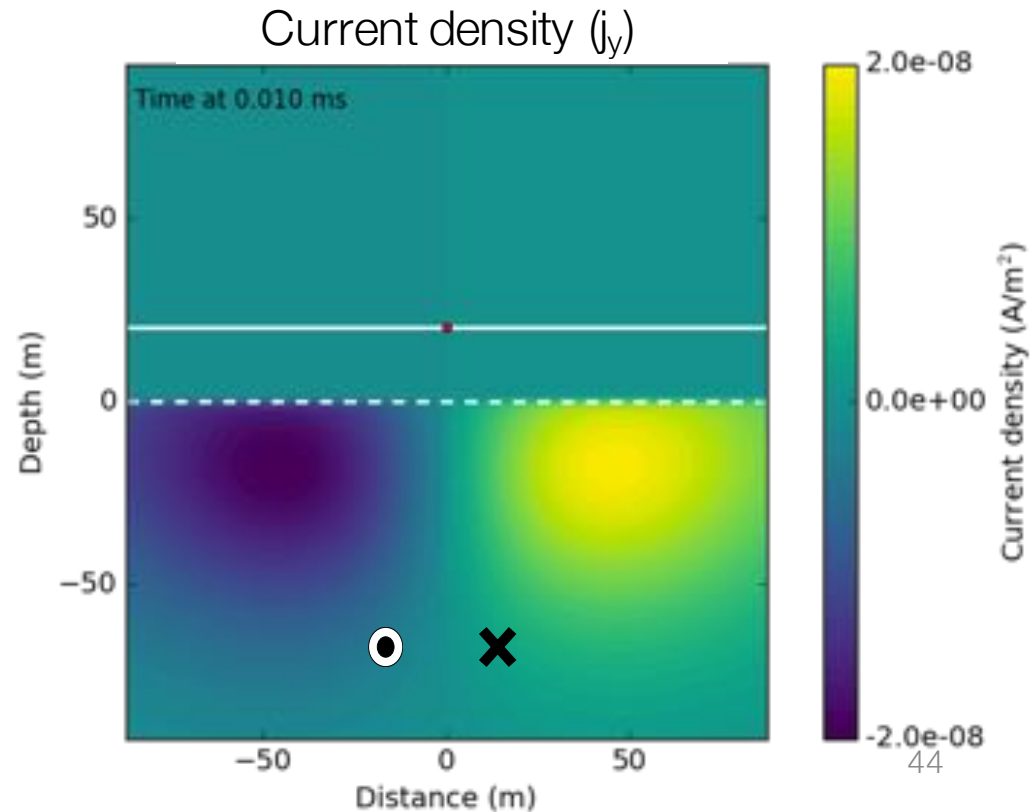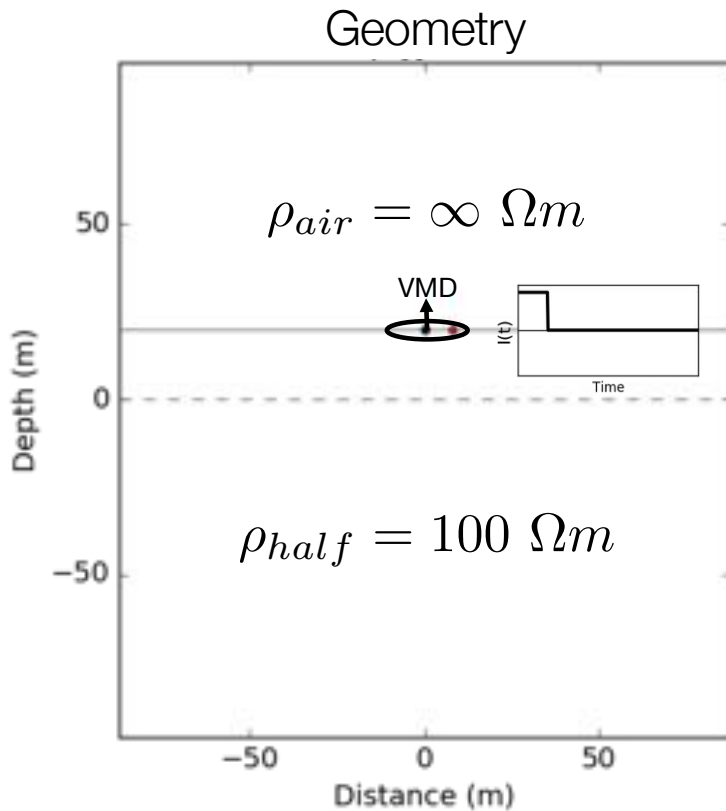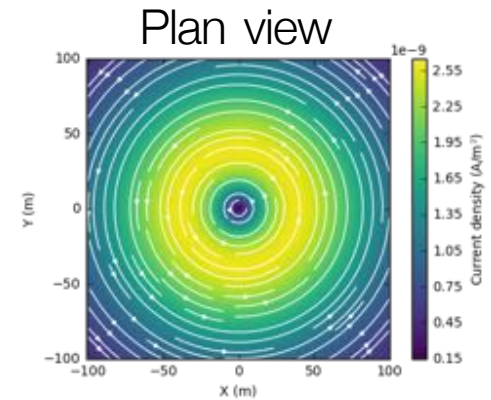

Magnetic flux density


- Time: 0.01ms

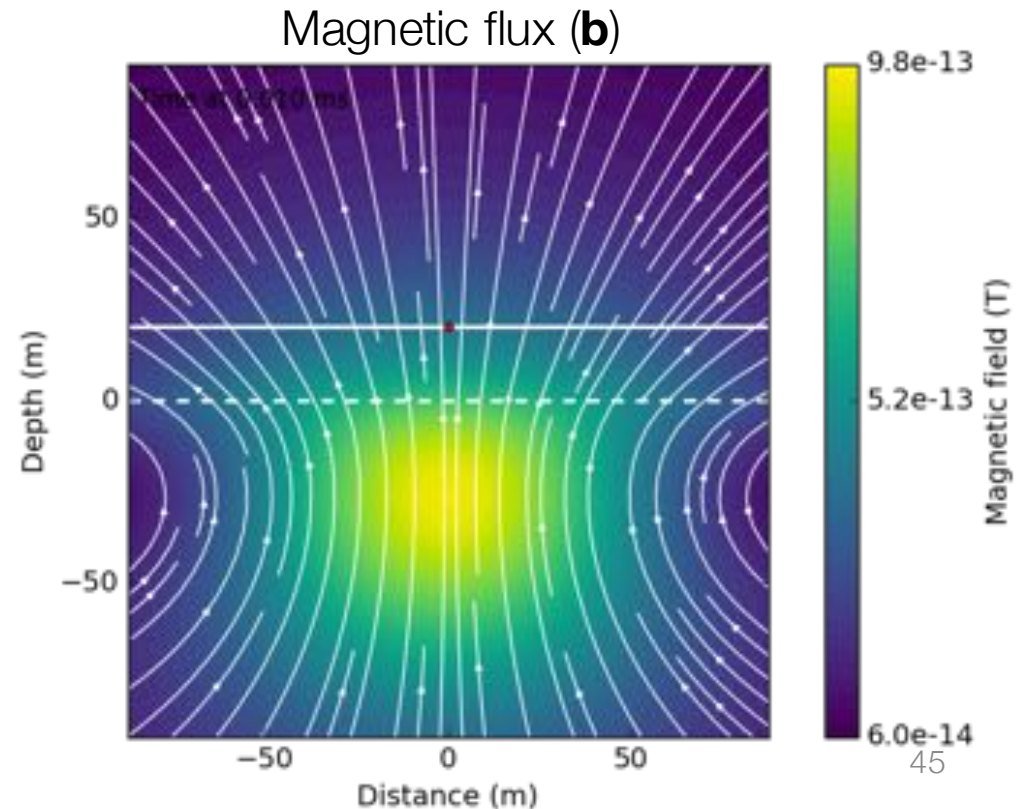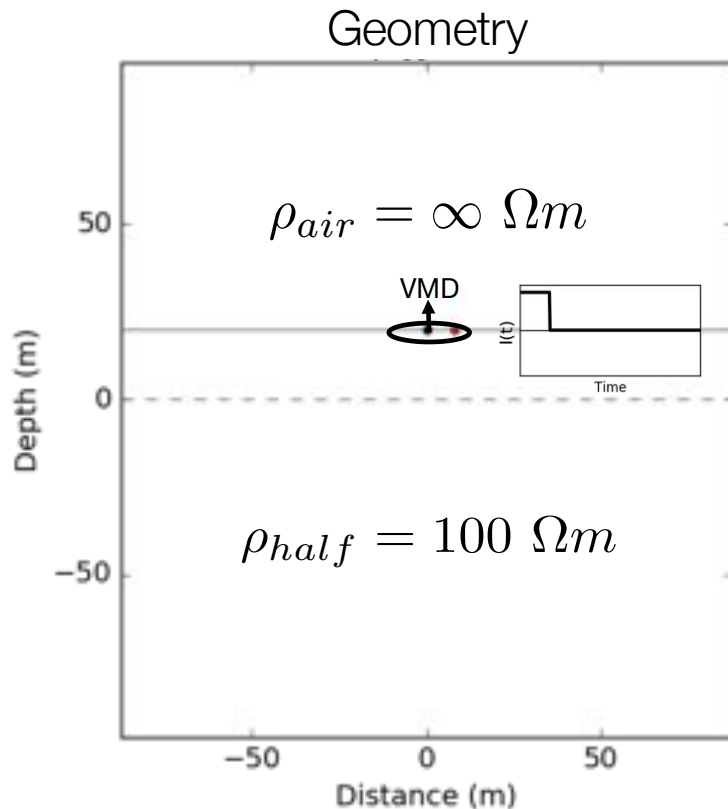

Propagation through time

- Time: 0.002ms
- diffusion distance = 18 m


$$d = 1260\sqrt{t\rho}$$

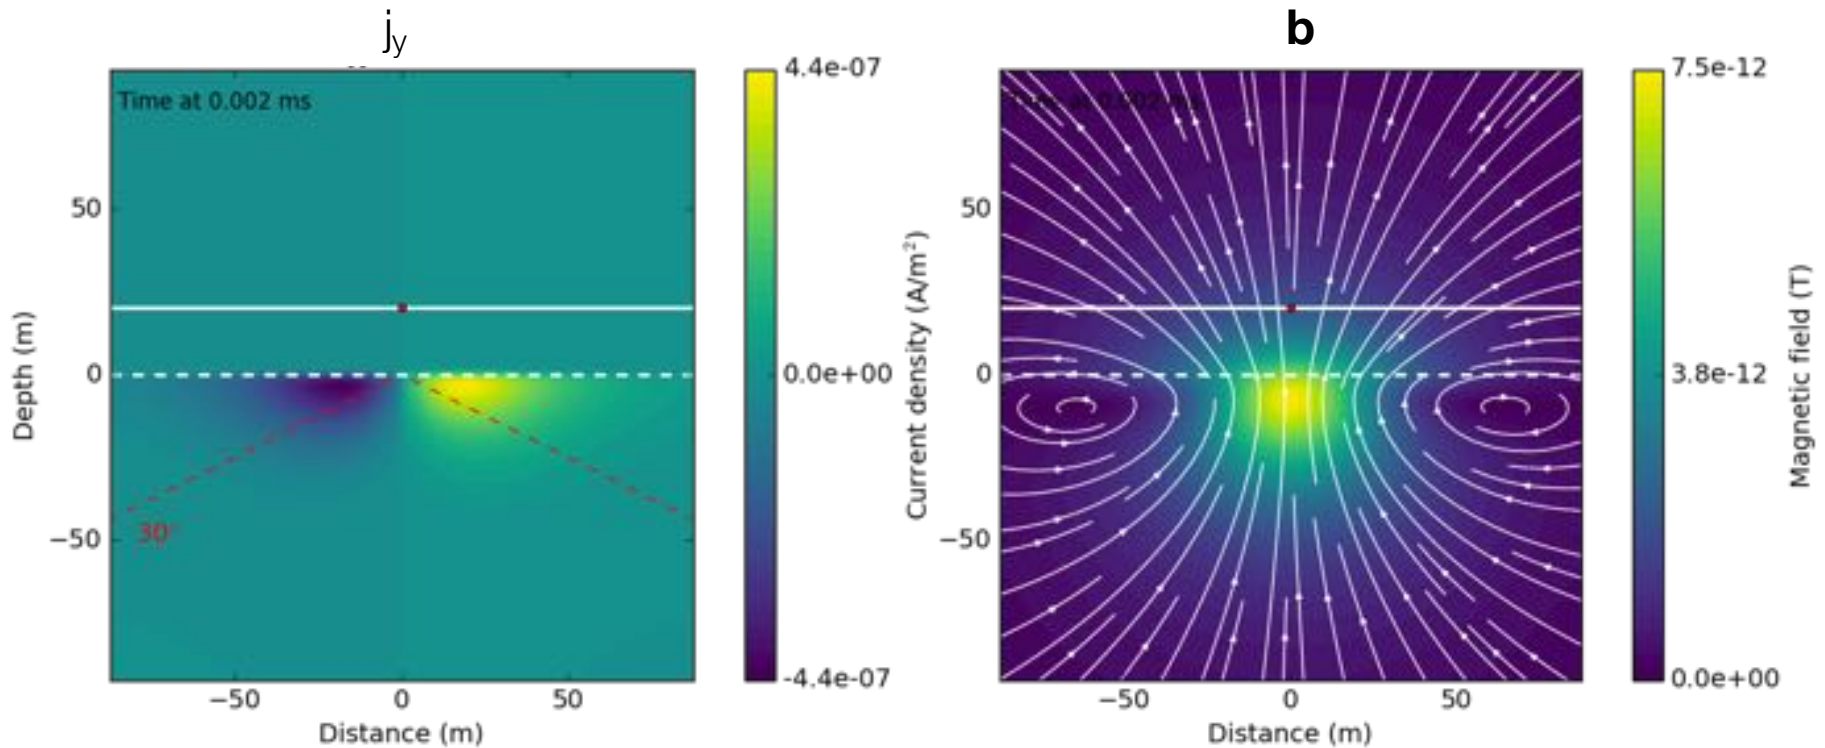

Propagation through time

- Time: 0.01ms
- diffusion distance = 38 m


$$d = 1260\sqrt{t\rho}$$

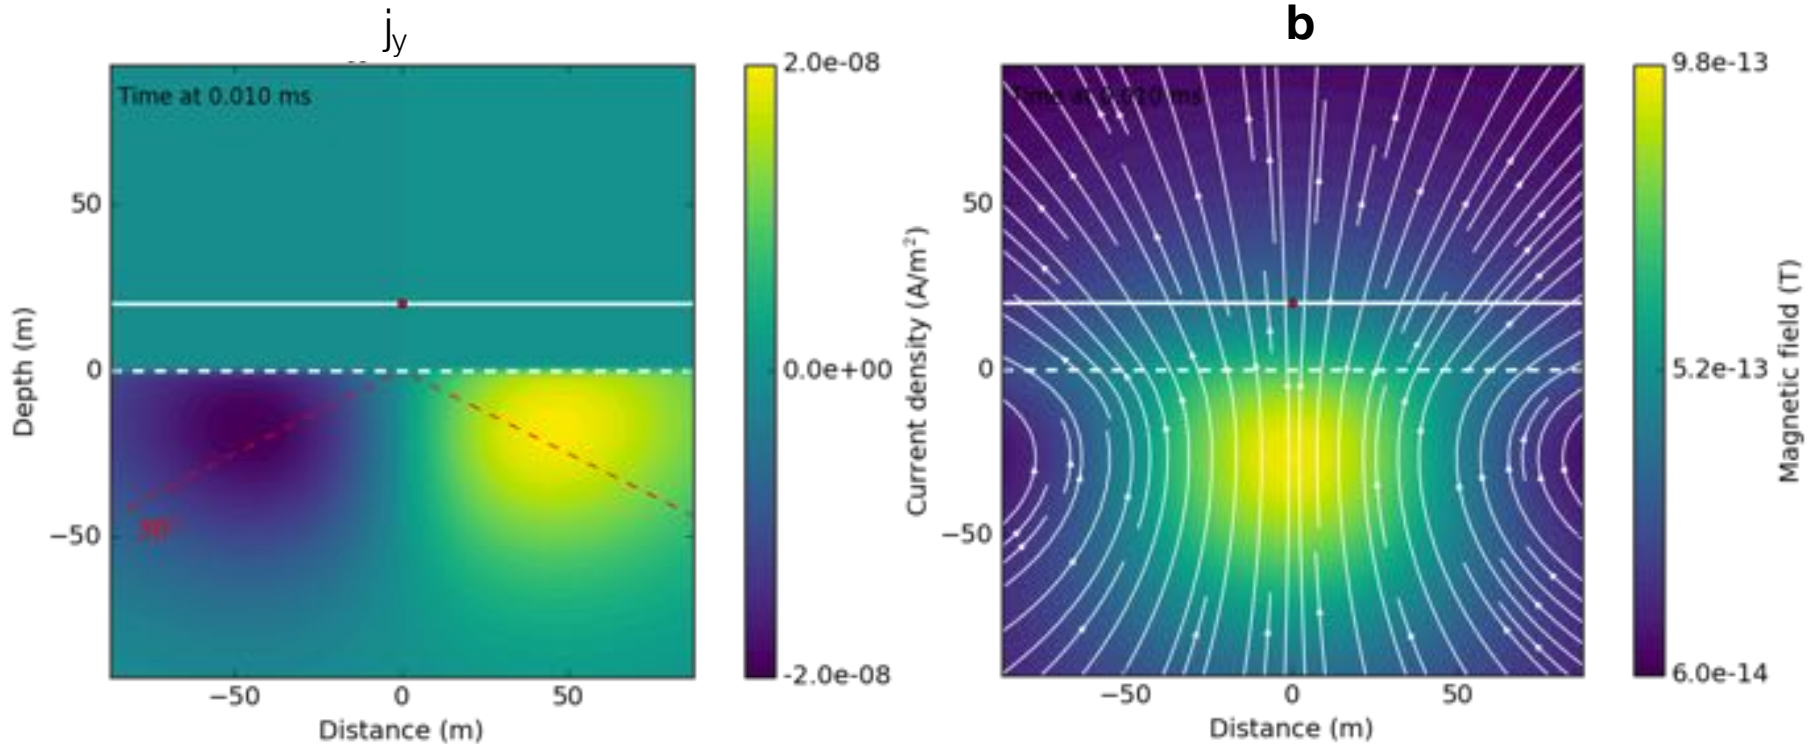

Propagation through time

- Time: 0.035ms
- diffusion distance = 75 m


$$d = 1260\sqrt{t\rho}$$

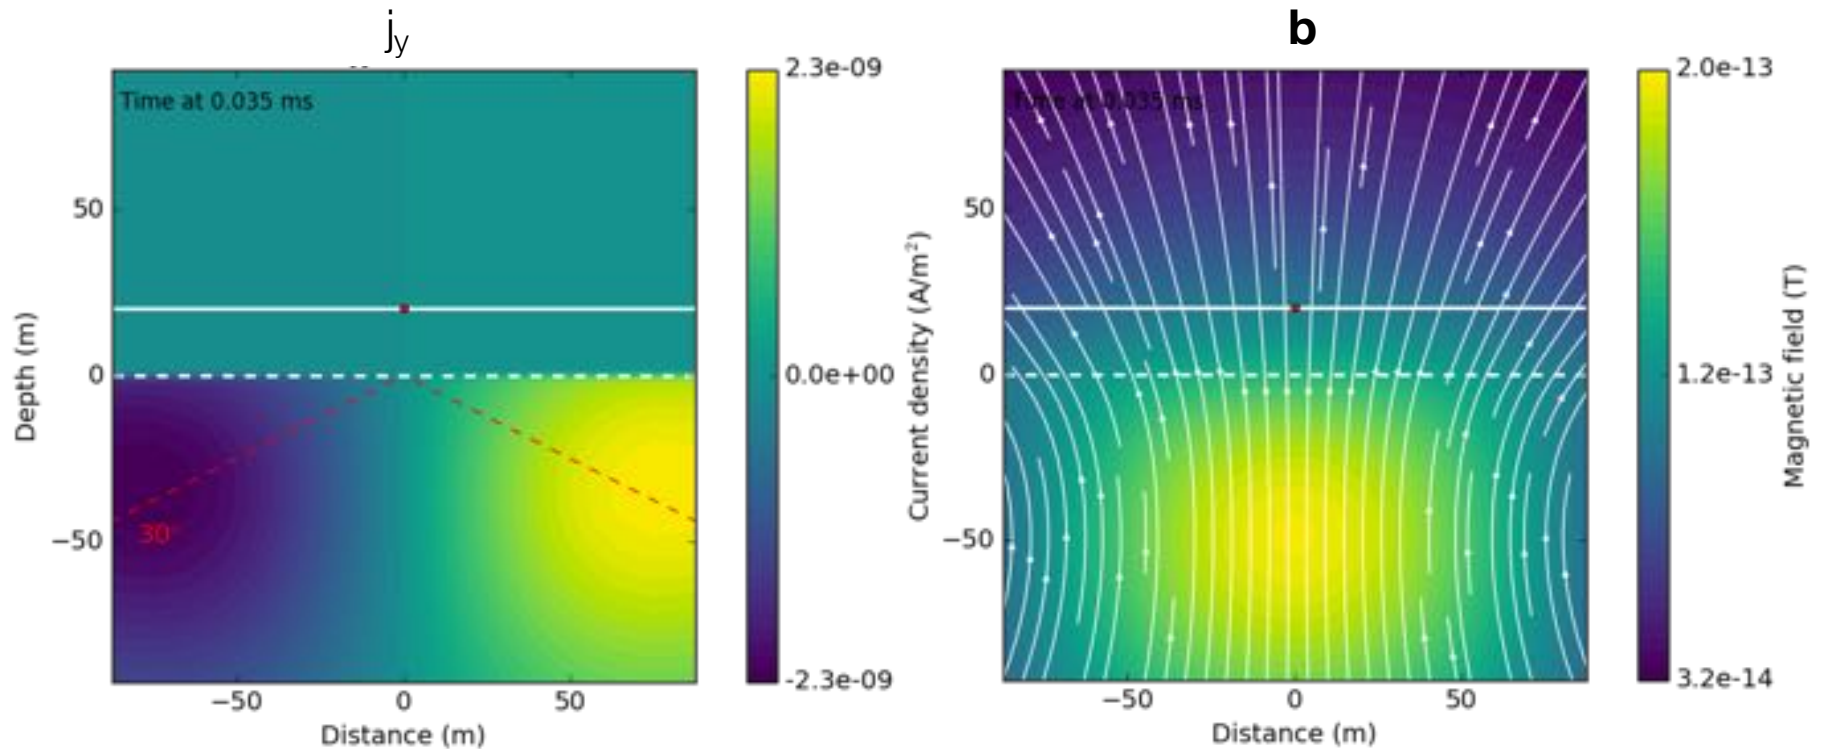




Propagation through time

- Time: 0.110ms
- diffusion distance = 132 m


$$d = 1260\sqrt{t\rho}$$

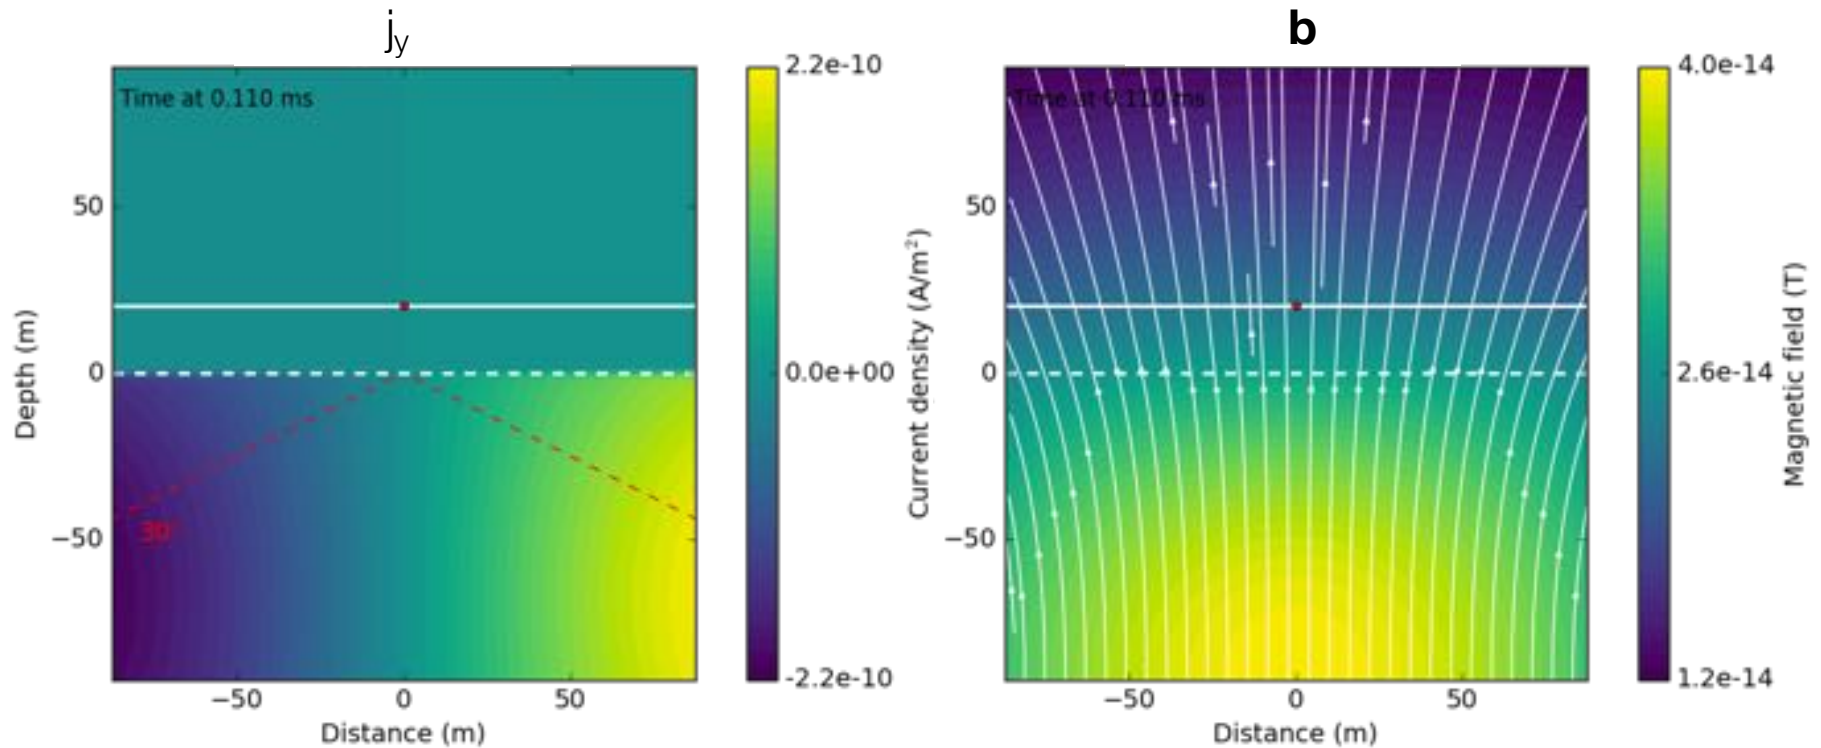

Summary: propagation through time

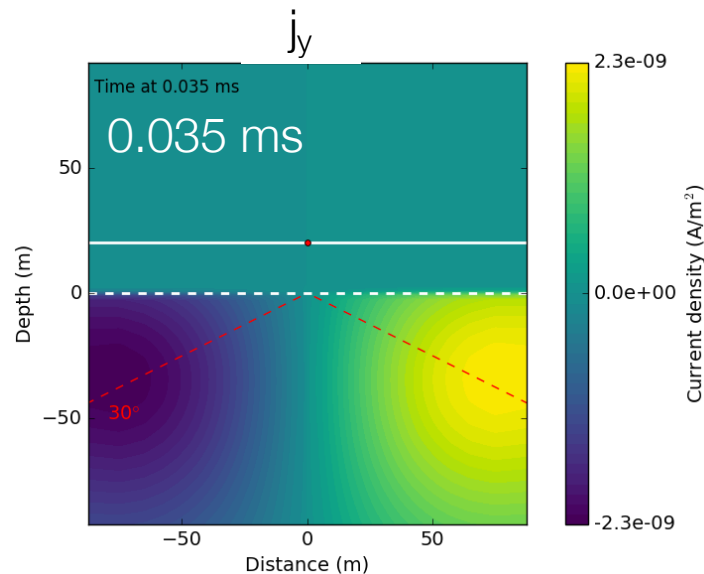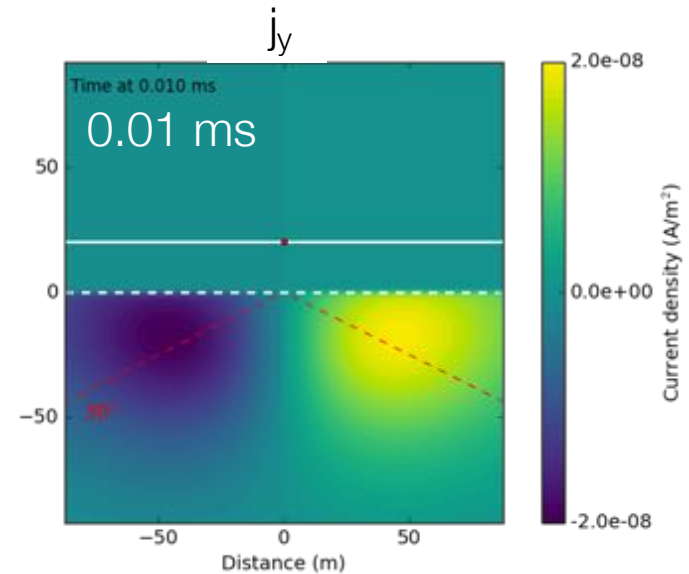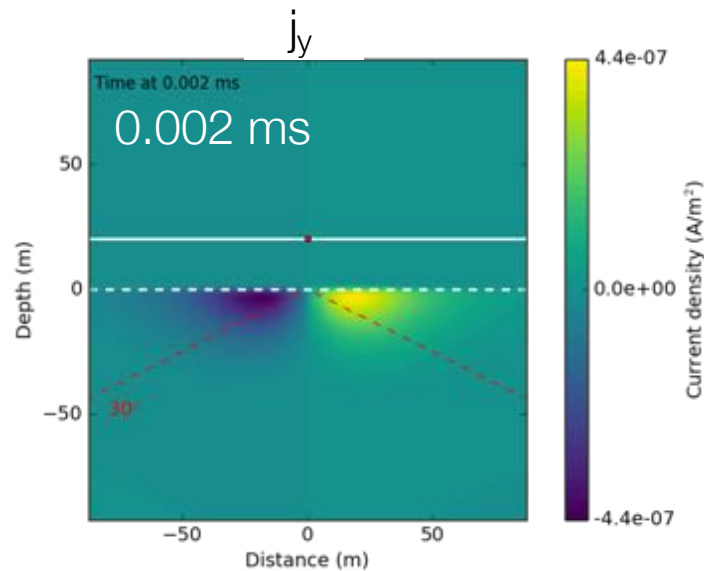



Nabighian (1979)

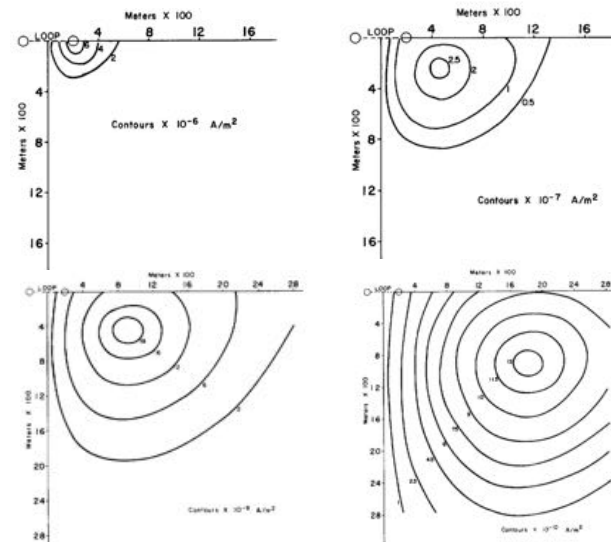

Important points

- Currents flow in same plane as transmitter currents
- Currents diffuse outward downward
- Each transmitter has a “footprint”
- Max resolution controlled by earliest time
- Depth of investigation controlled by latest time



magnetic field (on-time)

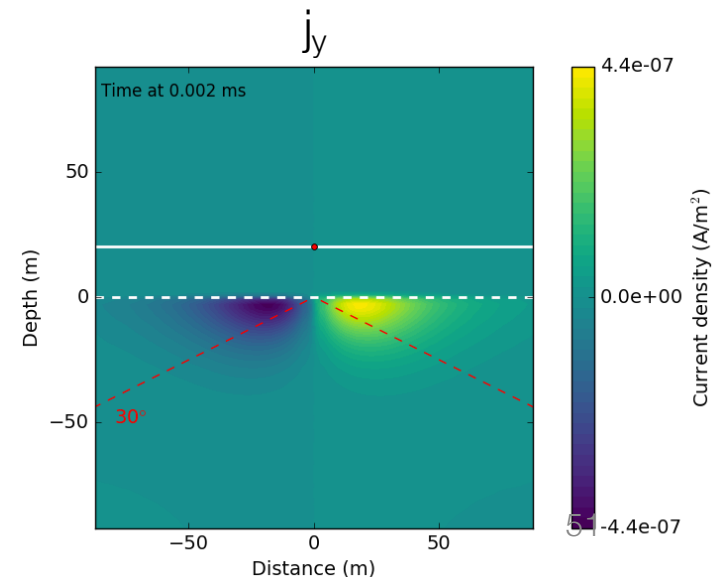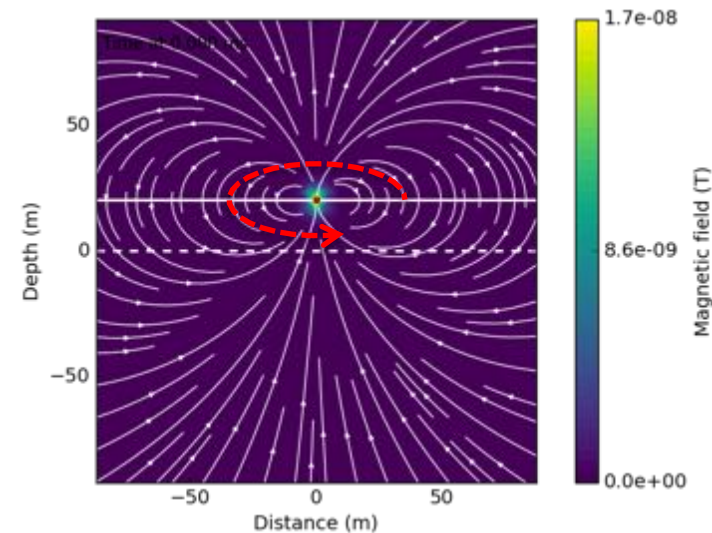

Important points


- Currents flow in same plane as transmitter currents
- Currents diffuse outward downward
- Each transmitter has a “footprint”
- Max resolution controlled by earliest time
- Depth of investigation controlled by latest time

magnetic field (on-time)

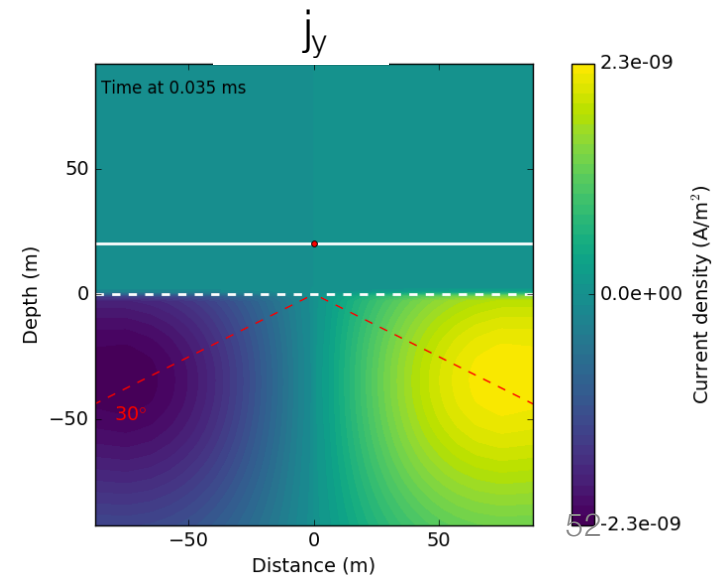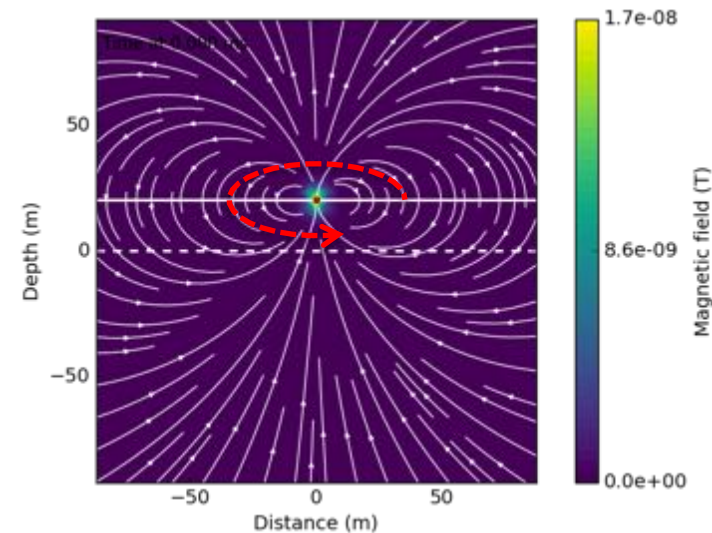

Layered earth


- 3 layers + air,
- ρ_2 varies

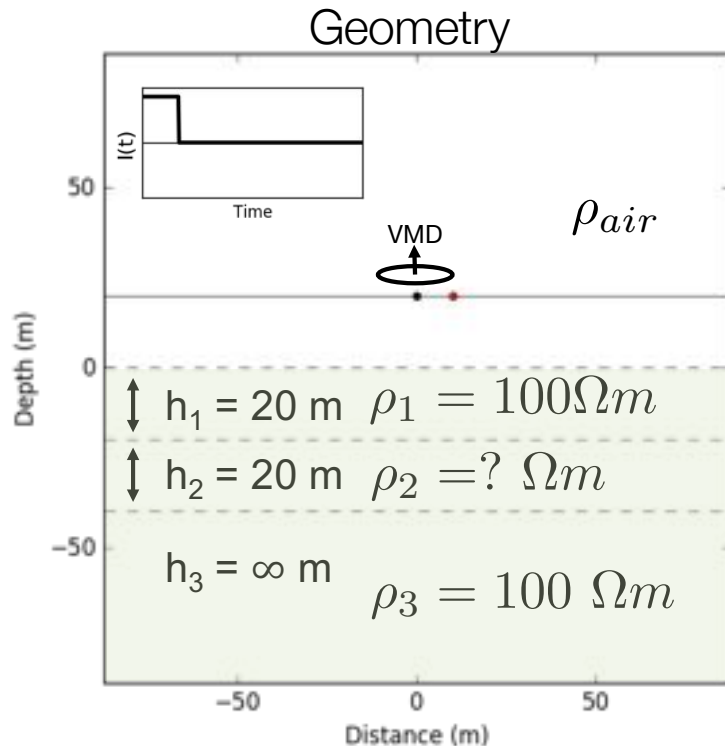


- Four different cases:
 - Halfspace
 $\rho_2 = 100 \Omega m$
 - Resistive
 $\rho_2 = 1000 \Omega m$
 - Conductive
 $\rho_2 = 10 \Omega m$
 - Very conductive
 $\rho_2 = 1 \Omega m$
- Fields
 - j_y off-time
 - **b** off-time

Layered earth currents (j_y)


$\rho_2 = 100 \, \Omega\text{m}$

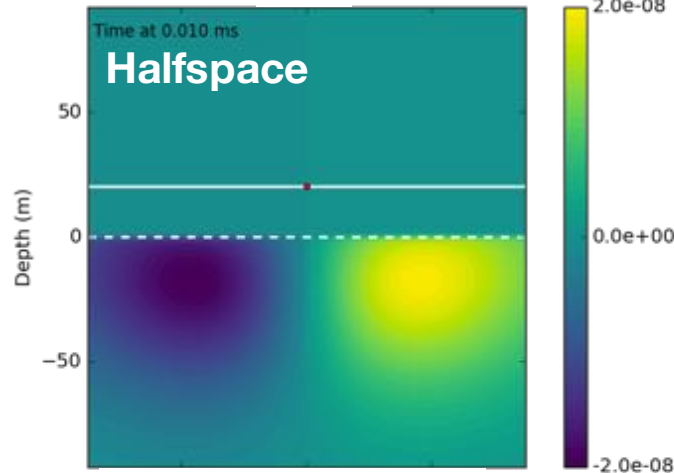


$\rho_2 = 1000 \, \Omega\text{m}$

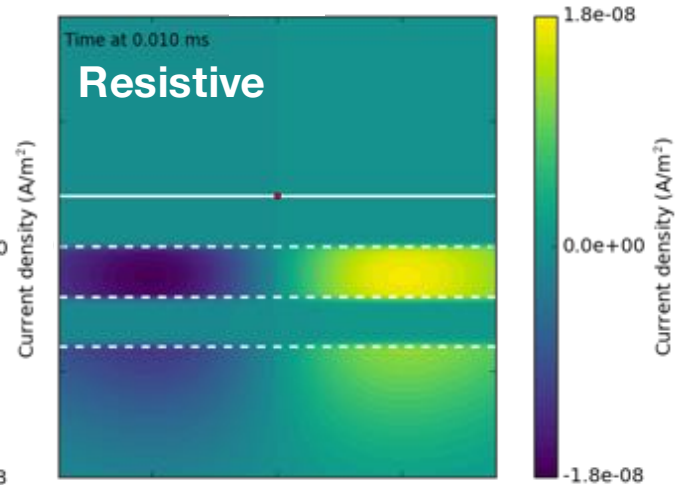

$\rho_2 = 10 \, \Omega\text{m}$

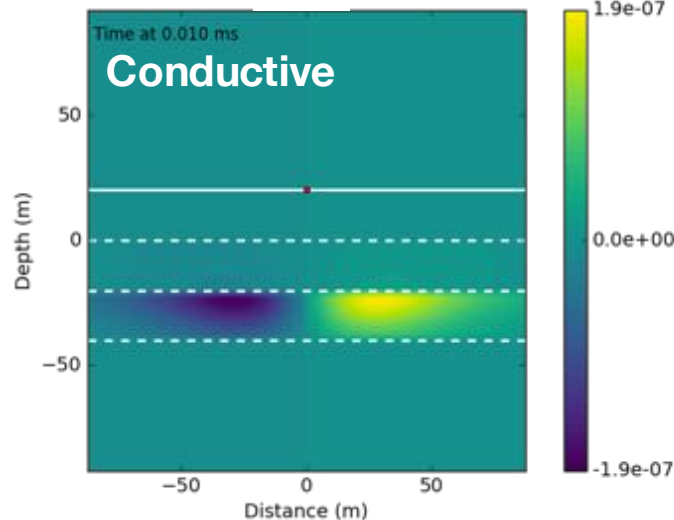


$\rho_2 = 1 \, \Omega\text{m}$

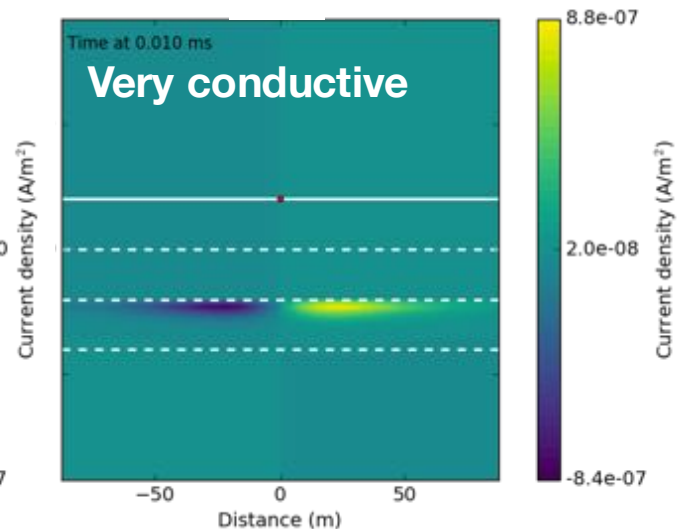


Layered earth mag. fields (**b**)


$\rho_2 = 100 \Omega\text{m}$

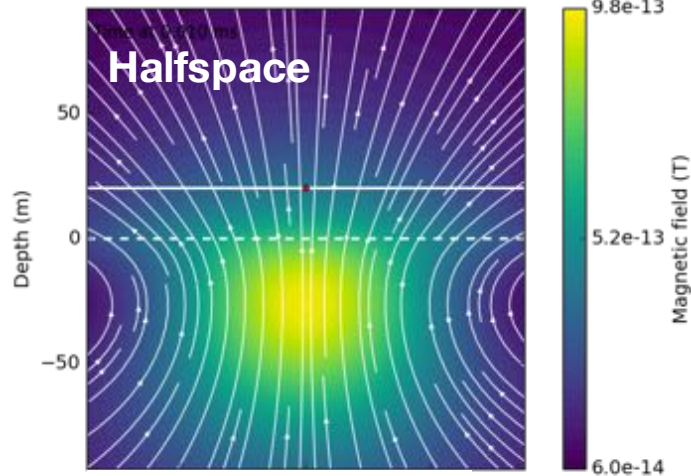


$\rho_2 = 1000 \Omega\text{m}$

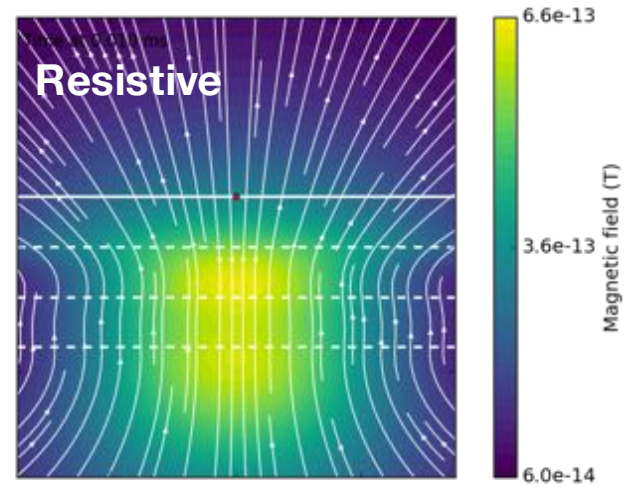









$\rho_2 = 10 \Omega\text{m}$

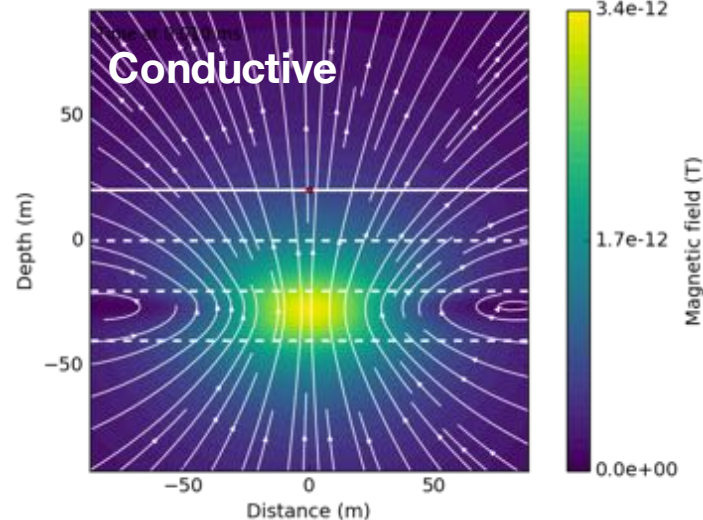

$\rho_2 = 1 \Omega\text{m}$

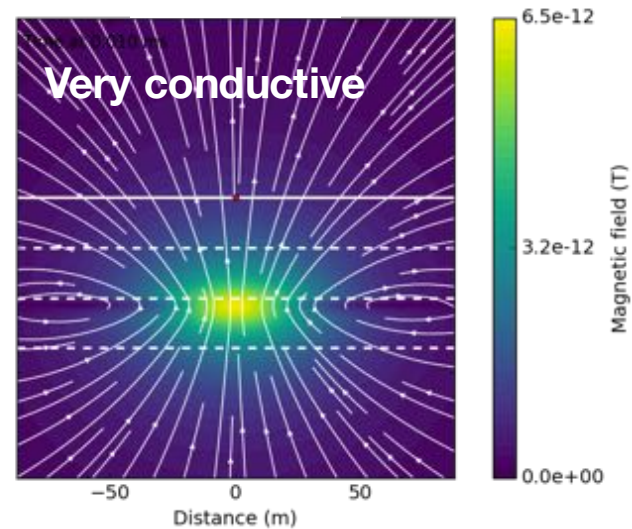


db_z/dt sounding curves

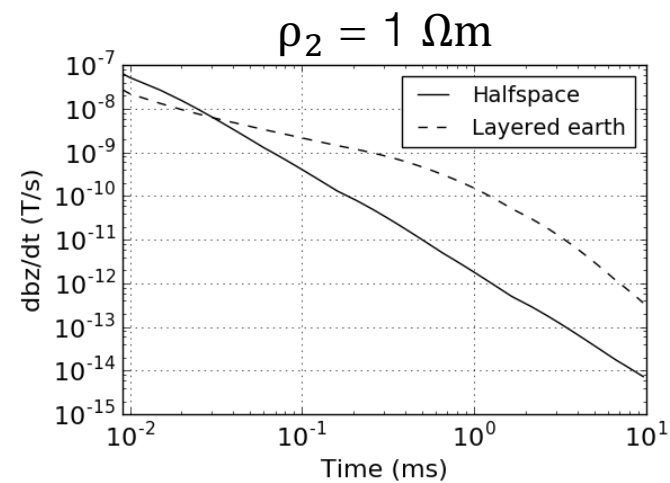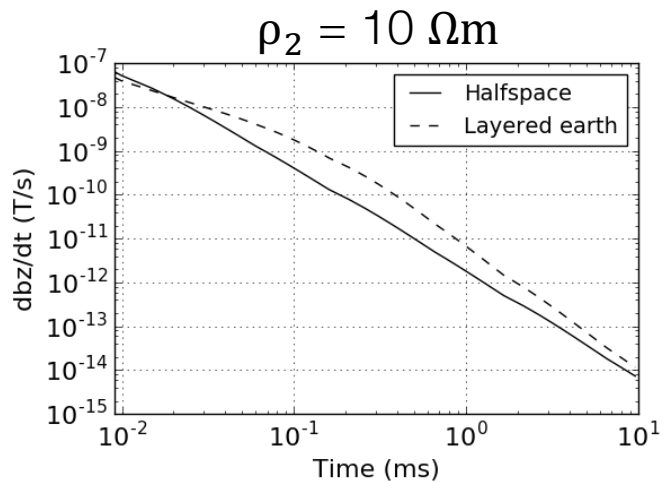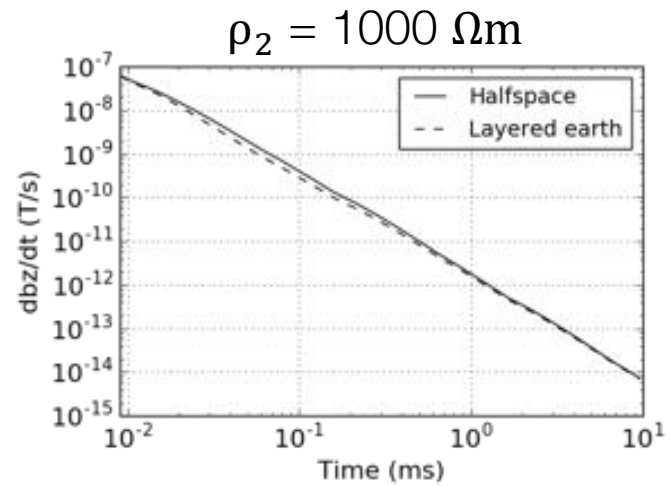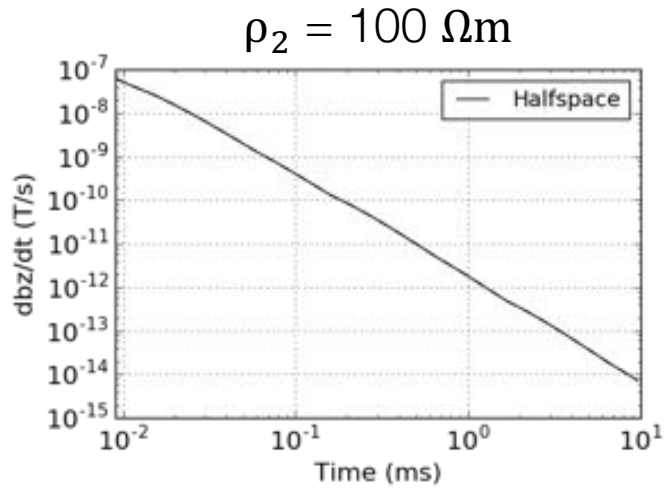


Airborne example: conductive sphere



Data profile

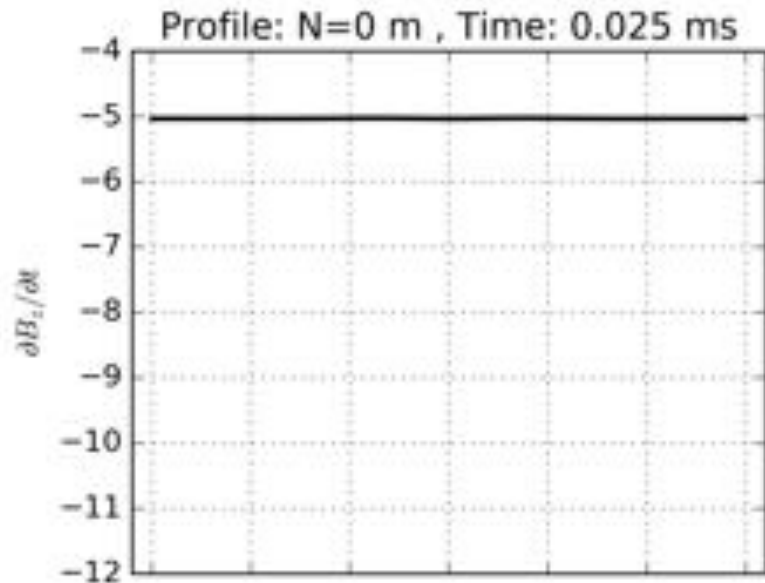

Data map

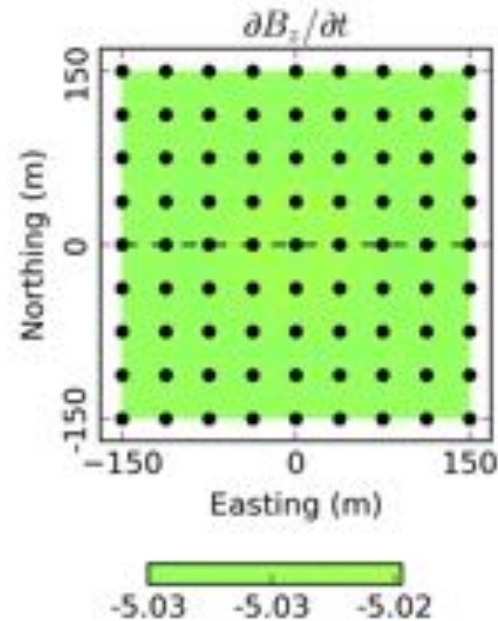


Conductivity

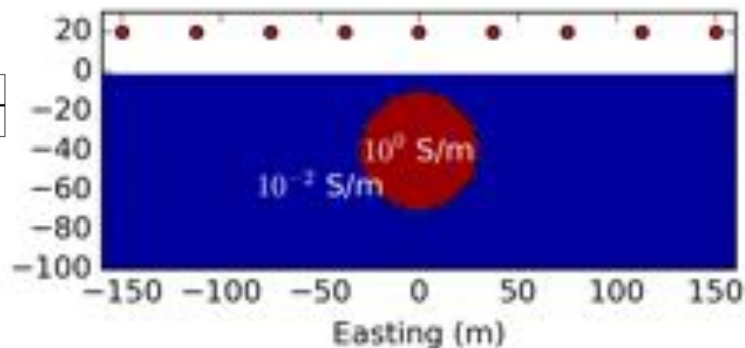


Airborne example: conductive sphere



Data profile

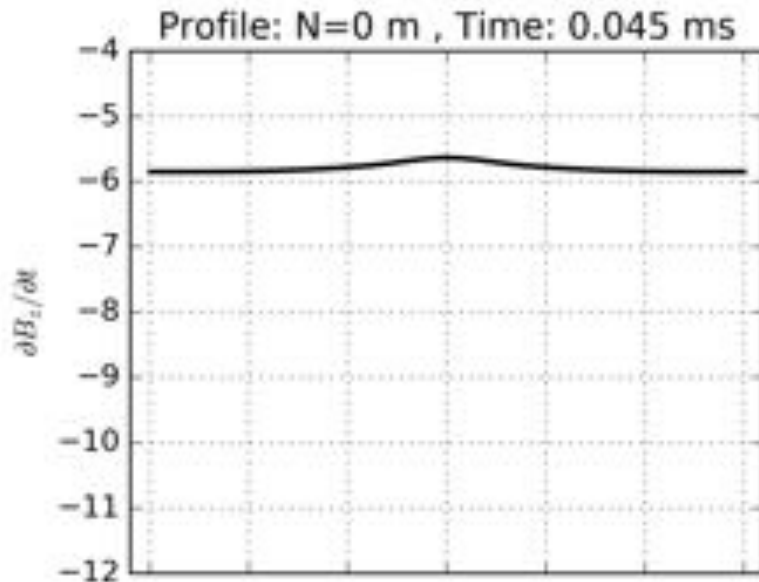

Data map

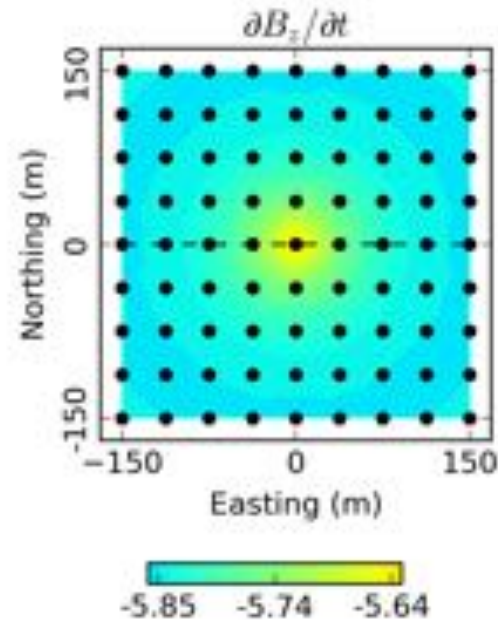


Conductivity

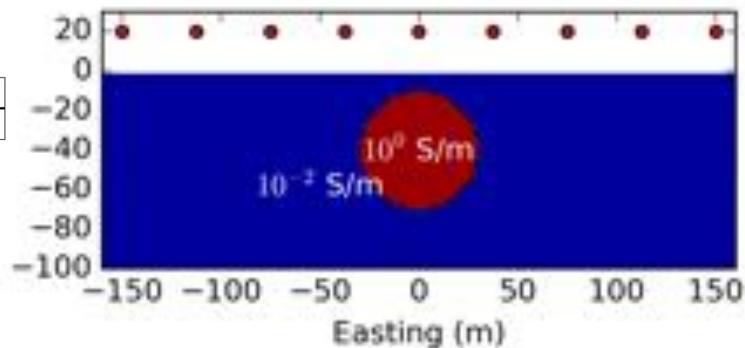


Airborne example: conductive sphere


Data profile

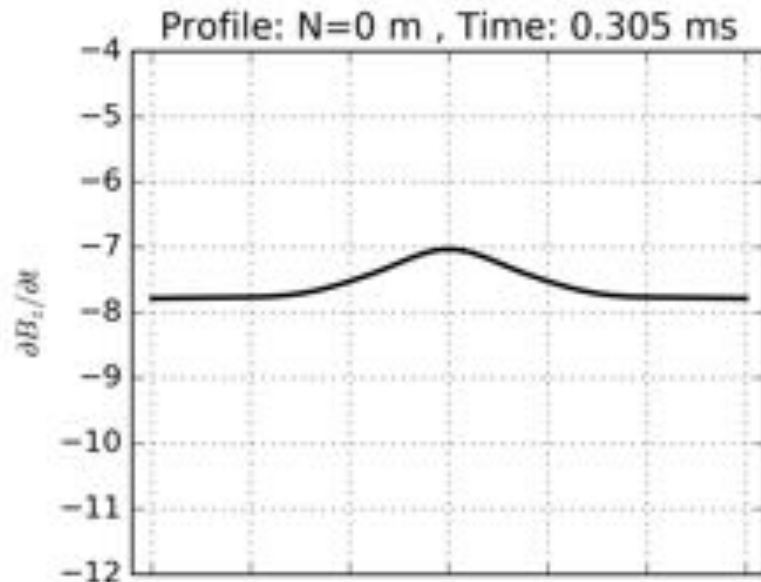

Data map

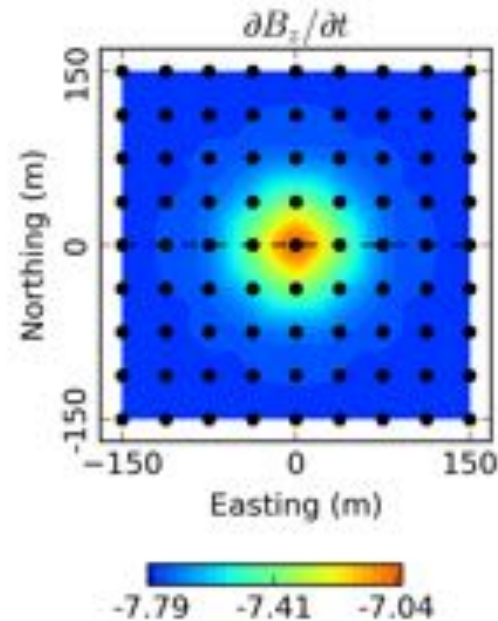


Conductivity

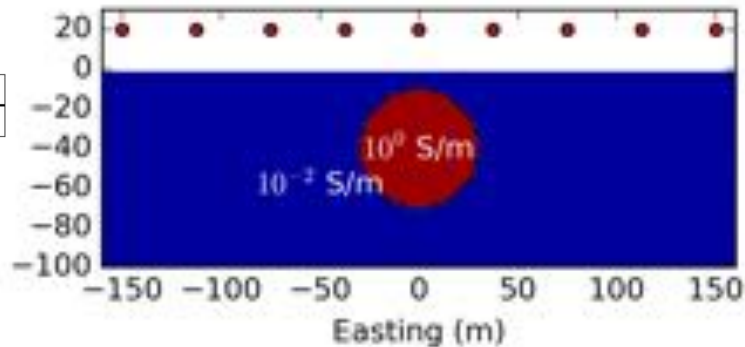


Airborne example: conductive sphere



Data profile

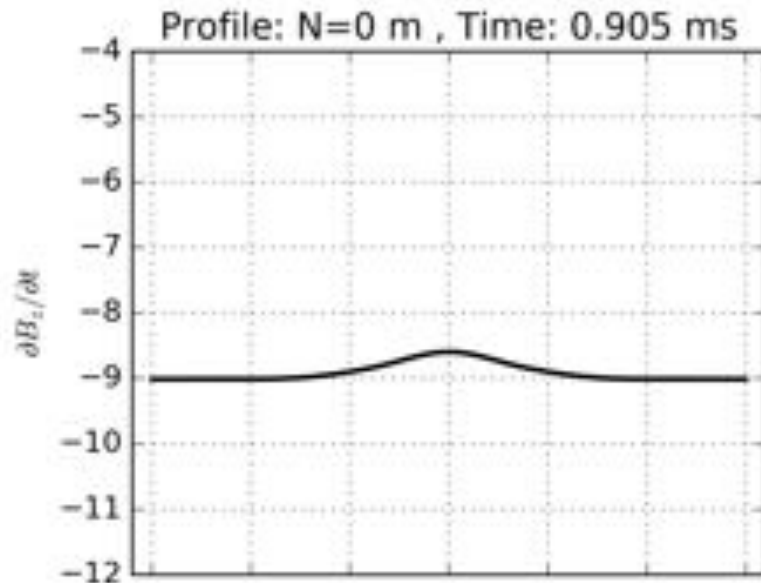

Data map

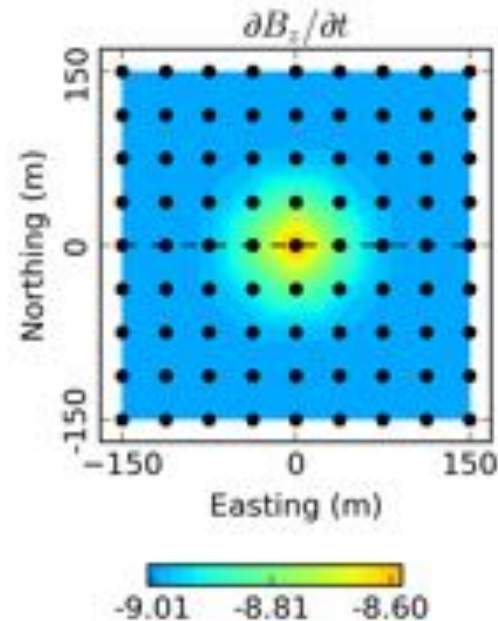


Conductivity

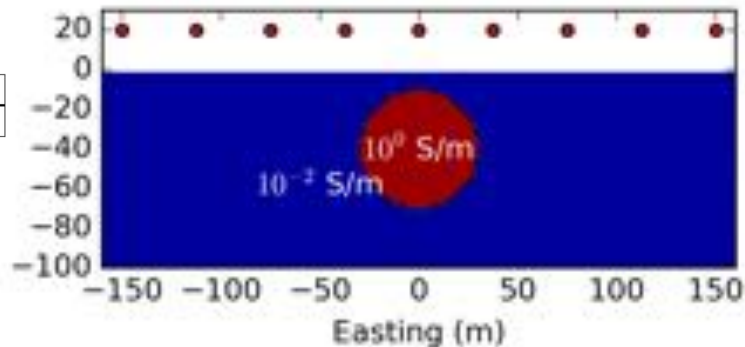


Airborne example: conductive sphere


Data profile

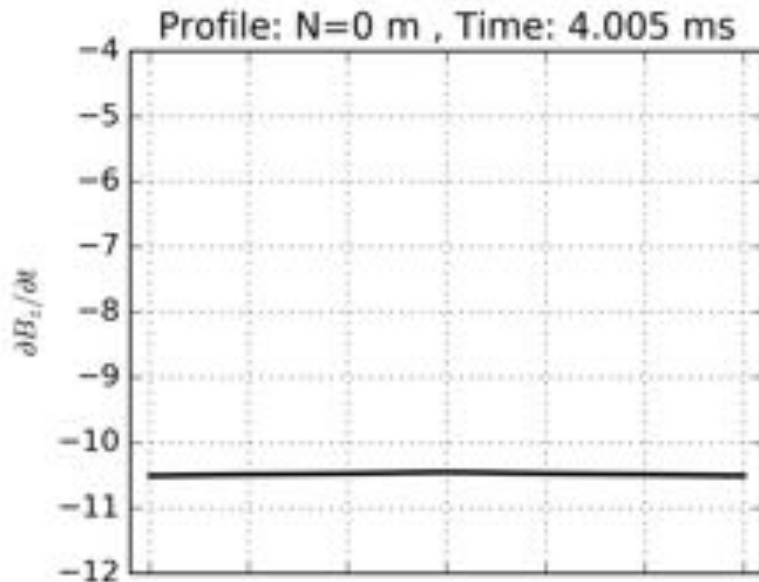

Data map

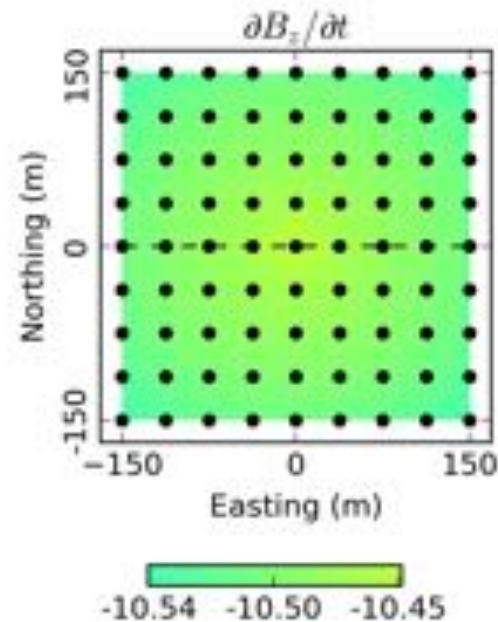


Conductivity

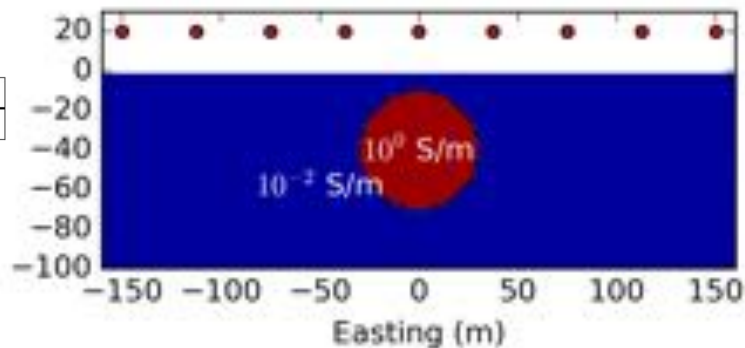


Summary: airborne example


Data profile

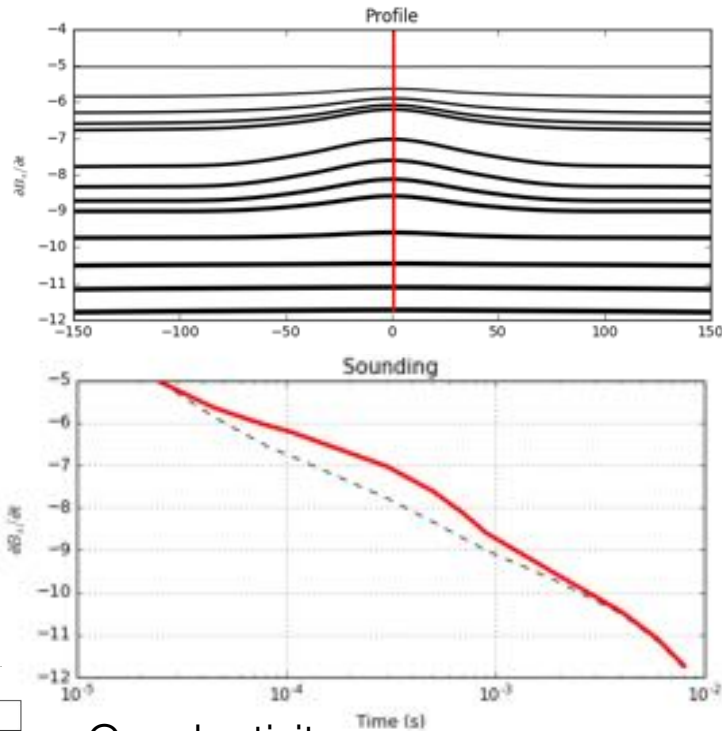


Conductivity

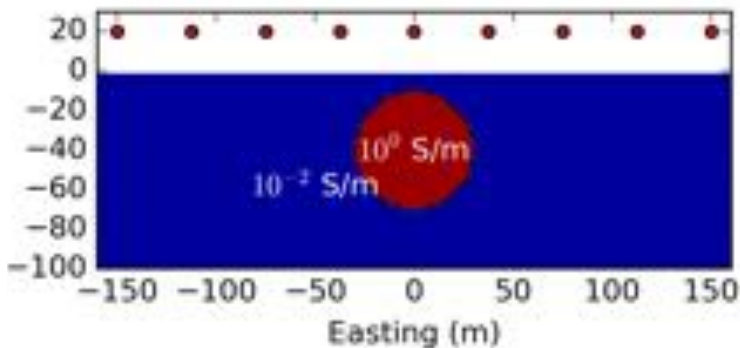


0.025 ms

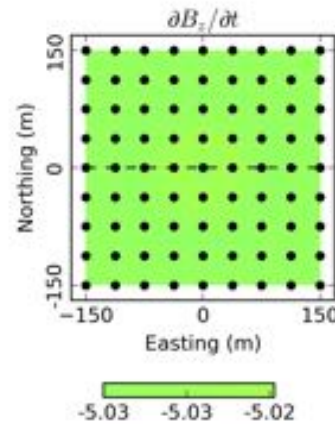


0.045 ms

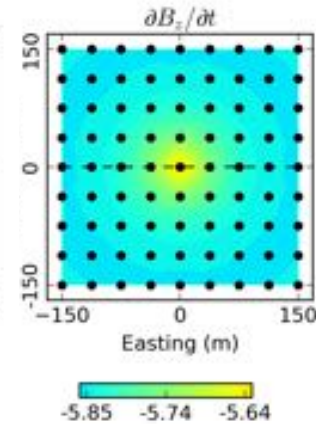


0.305 ms

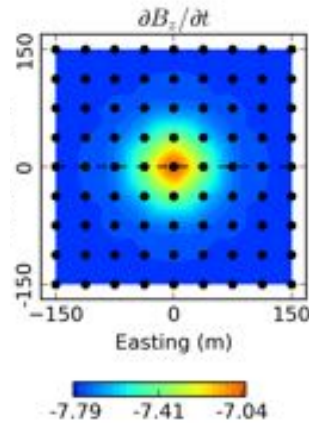

0.905 ms

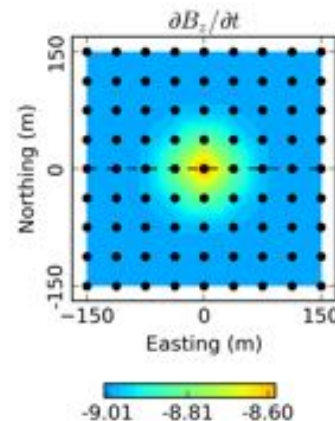


4.005 ms

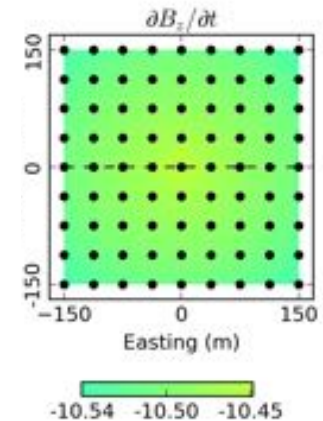


TDEM Receiver

Magnetometer

- Measures:
 - Magnetic field
 - 3 components
- eg. 3-component fluxgate



Fluxgate




Squid

$$\mathbf{b}(t)$$


Coil

- Measures:
 - Voltage
 - Single component that depends on coil orientation
 - Coupling matters
- Airborne TDEM: measure db/dt


$$\frac{\partial b}{\partial t}$$



Coil

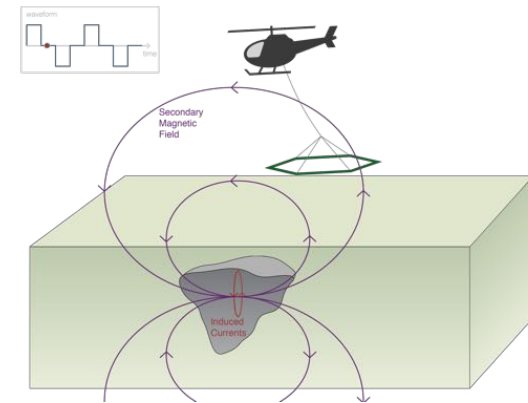


Measured decay

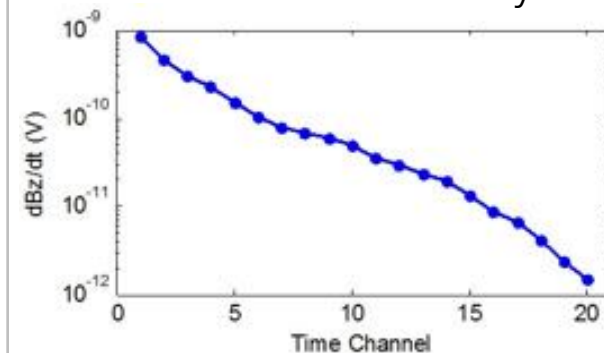

Some Airborne TDEM Systems


SkyTEM (2006)

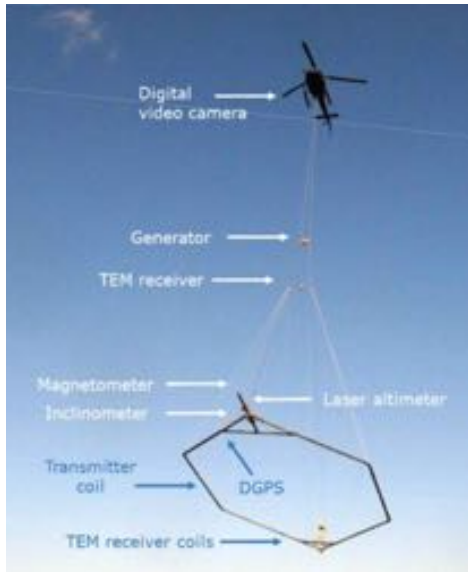


Area = 314 m²

Peak dipole moment:

- HM: 113040 NIA
- LM: 12560 NIA





VTEM (2007)

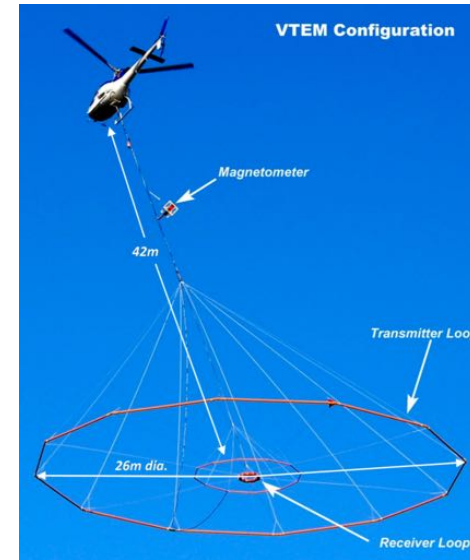

Area = 535 m²

Peak dipole moment:

- 503,100 NIA

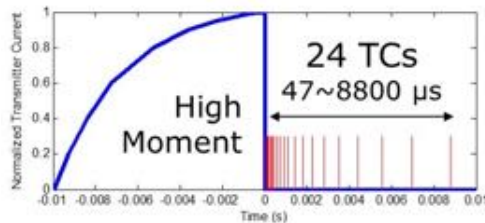


Peak current: 90 A

Turns: 4

On-time: 10 ms

Off-time: 10 ms

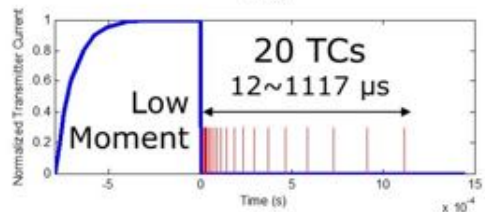


Peak current: 40 A

Turns: 1

On-time: 0.8 ms

Off-time: 1.45 ms

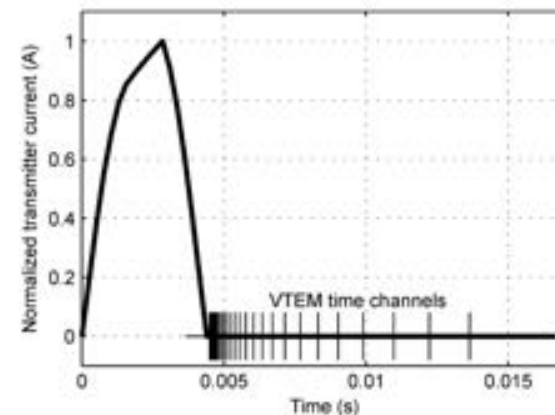

Peak current: 235 A

Turns: 4

On-time: 4.5 ms

Off-time: 9.1 ms

Outline

Setup



Frequency Domain EM

Time Domain EM

- Vertical Magnetic Dipole
- Propagation with Time
- Effects of Background Conductivity
- Transmitters and receivers
- Decay Curves
- Questions
- Case History – Oil and gas

Case History: Wadi Sahba


Colombo et al. 2016

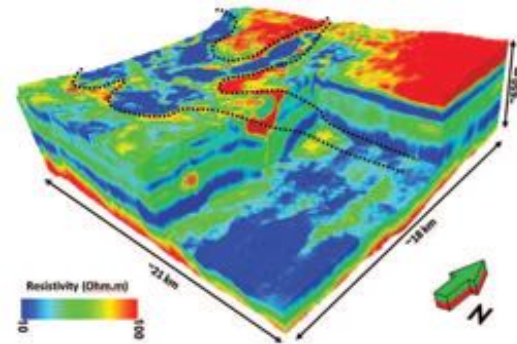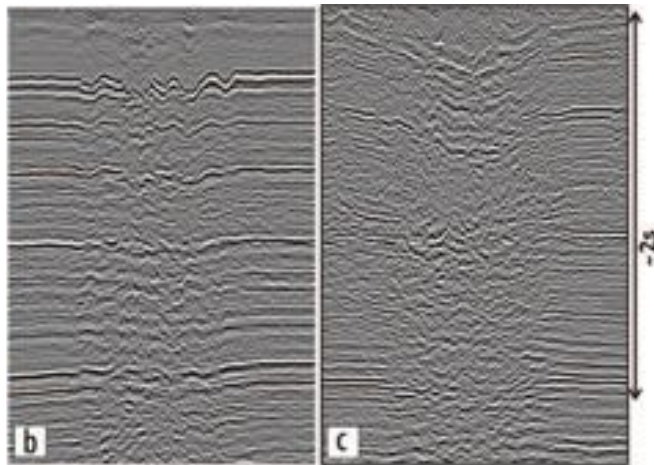


?

Setup

Location of Wadi area, Saudi Arabia

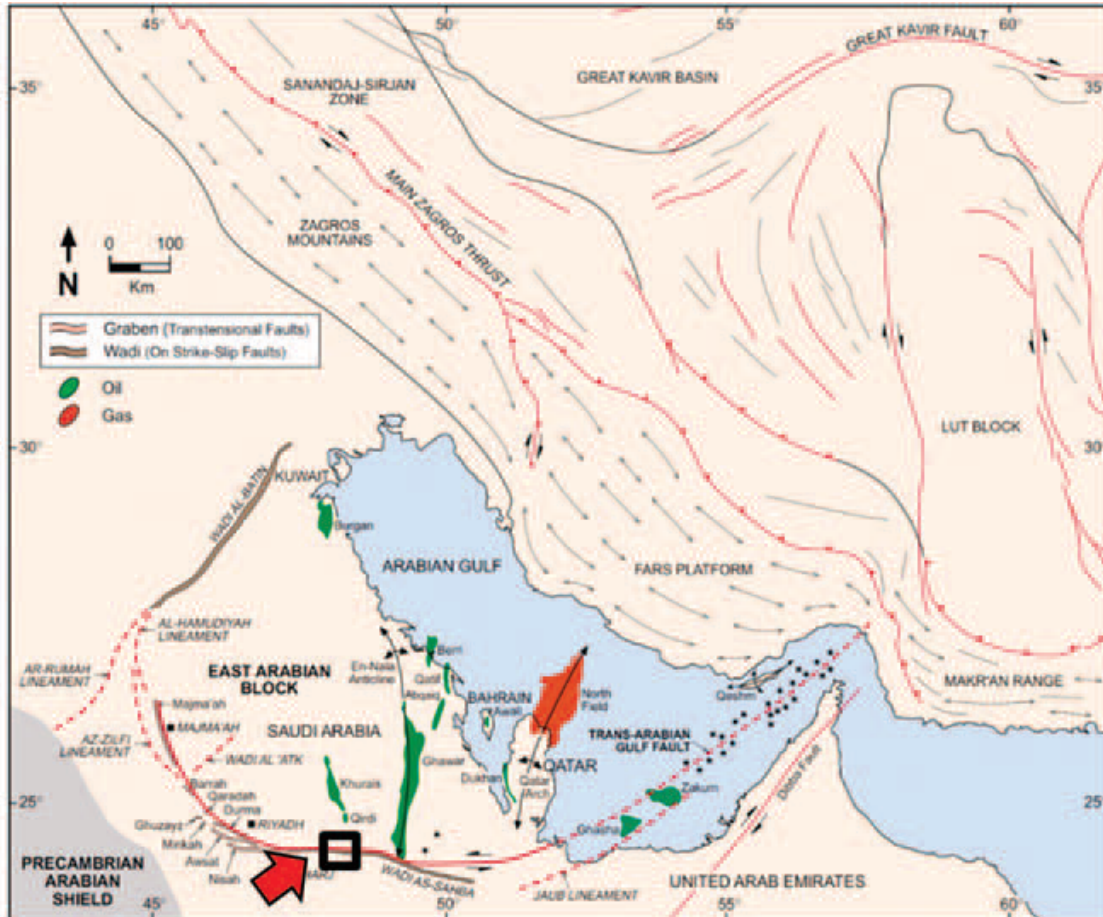


Seismic slice

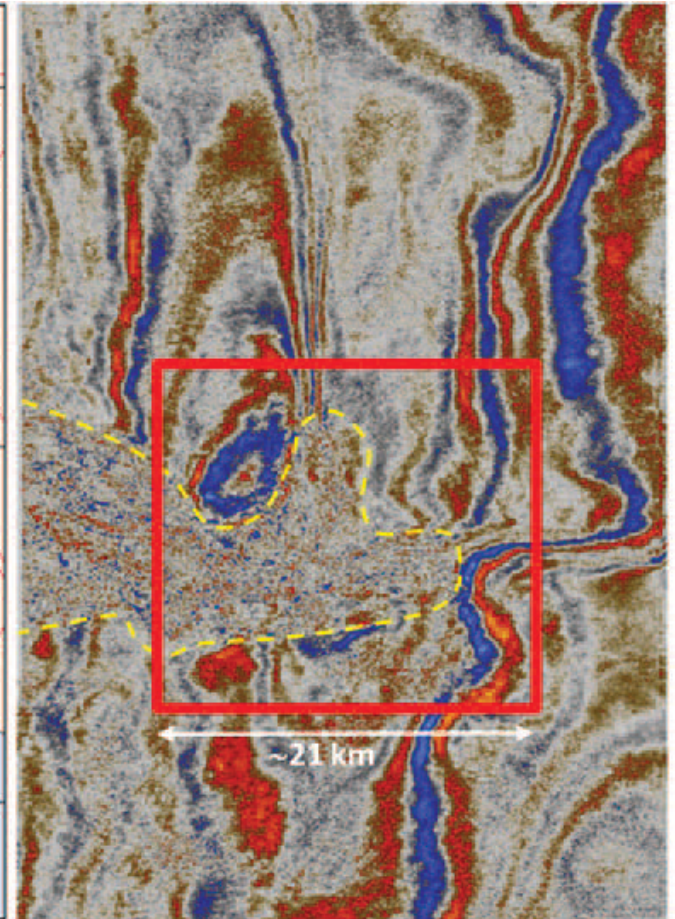

- Oil and gas exploration in the Middle East: Major structures to stratigraphic traps and low relief structures

Challenges for processing seismic data

Example seismic sections

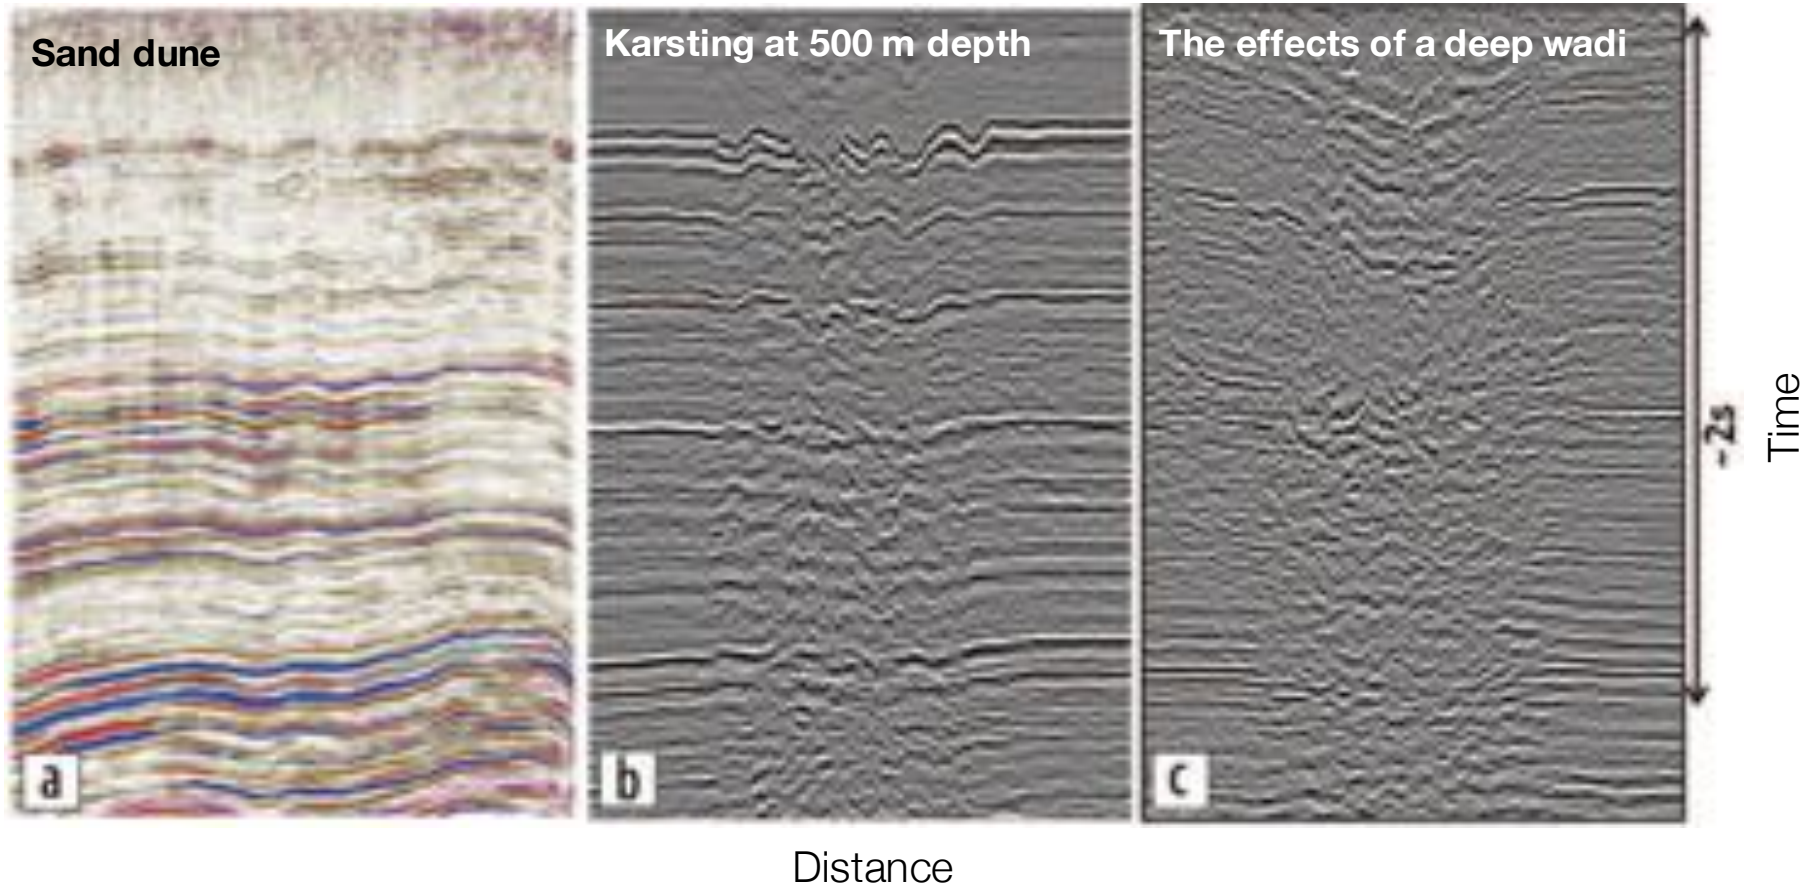

- Strong effects from near surface anomalies even after static corrections

Properties

- P-velocity and conductivity:

$$v_p = g(\phi)$$

$$\sigma = f(\phi)$$

v_p : P-velocity

ϕ : porosity


- Poor seismic data:

- strong scattering effects probably caused by flower faults
- velocity inversions (high to low v_p)

- From previous multi-physics analyses:

- strong structural similarity between the inverted resistivity, and the existing seismic results


Geologic map

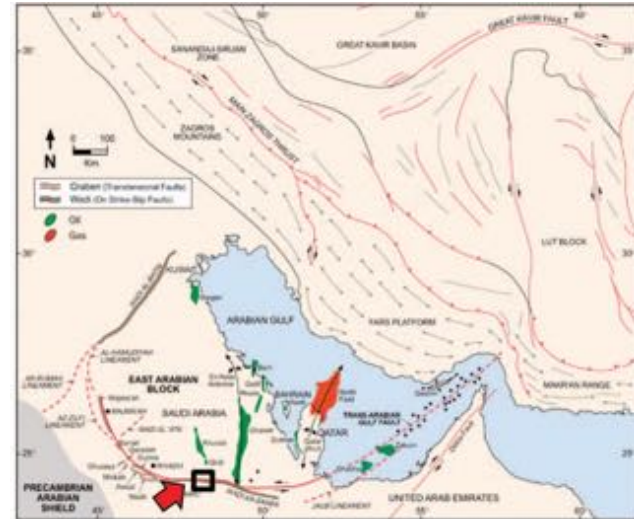

Seismic section




Flower faults

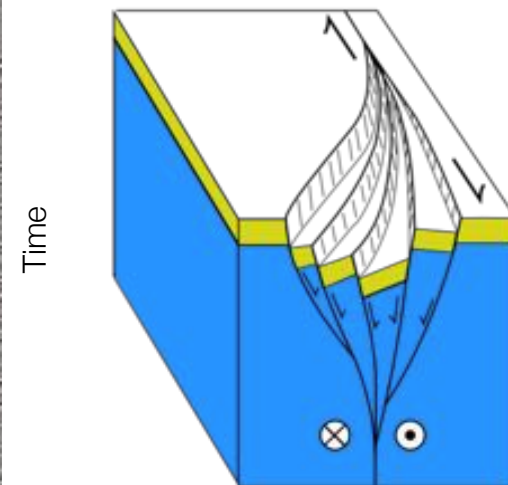


Distance

Survey

HELITEM

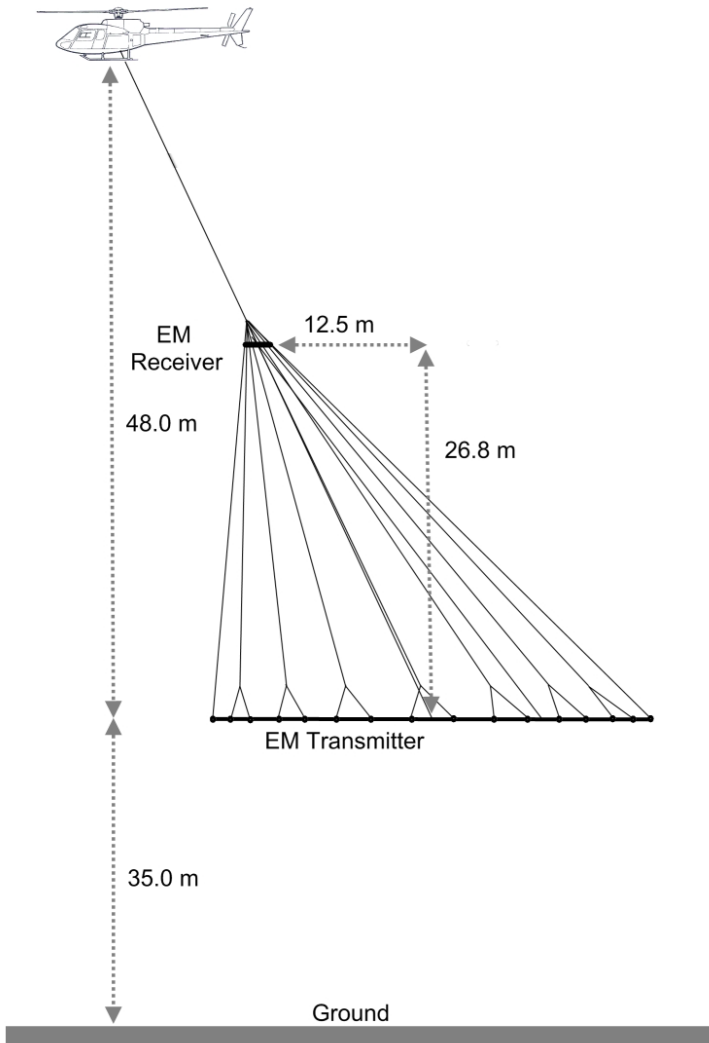


System Configuration

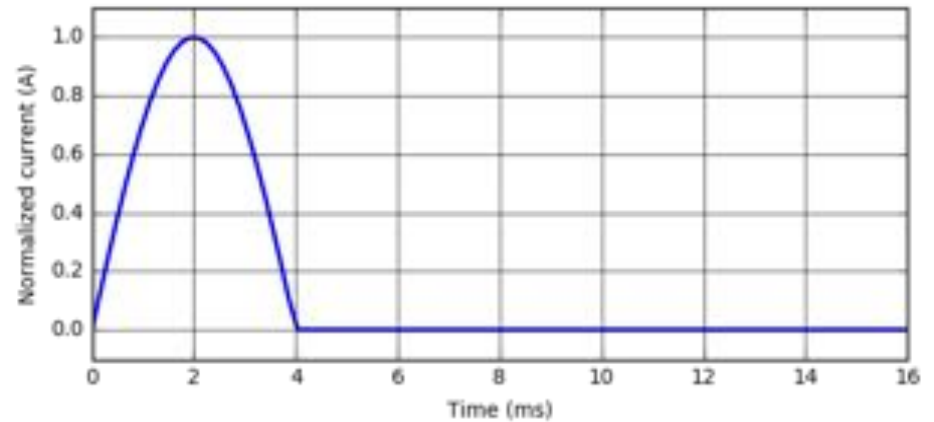


- Peak Tx current: 1200 A
- Dipole moment: 1.7×10^6 A-m²
- Stacked TEM curve spacing: ~2.7 m
- Total soundings: ~1.6 million


Comparisons: airborne and ground EM

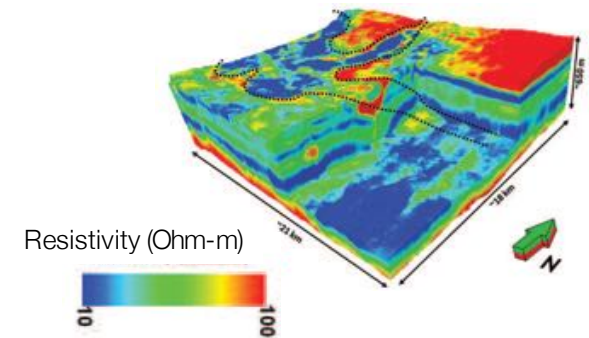

Conductive area

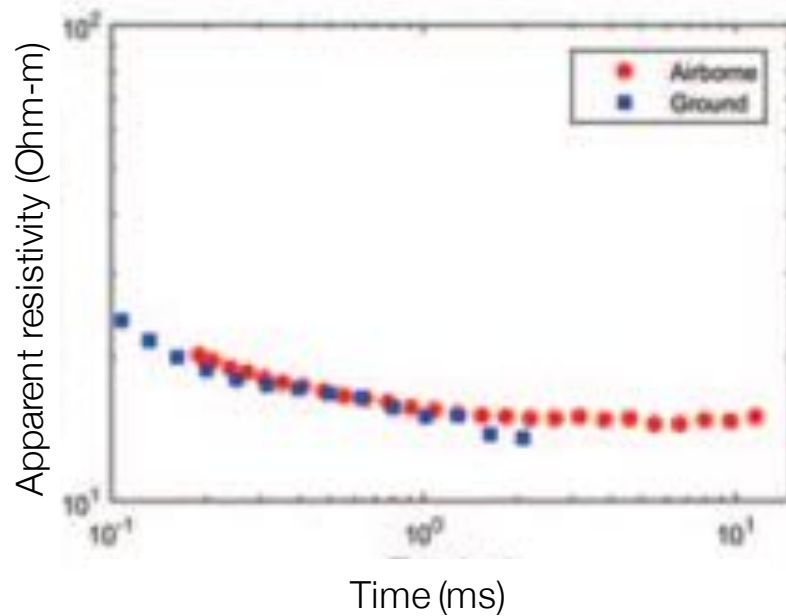


Resistive area

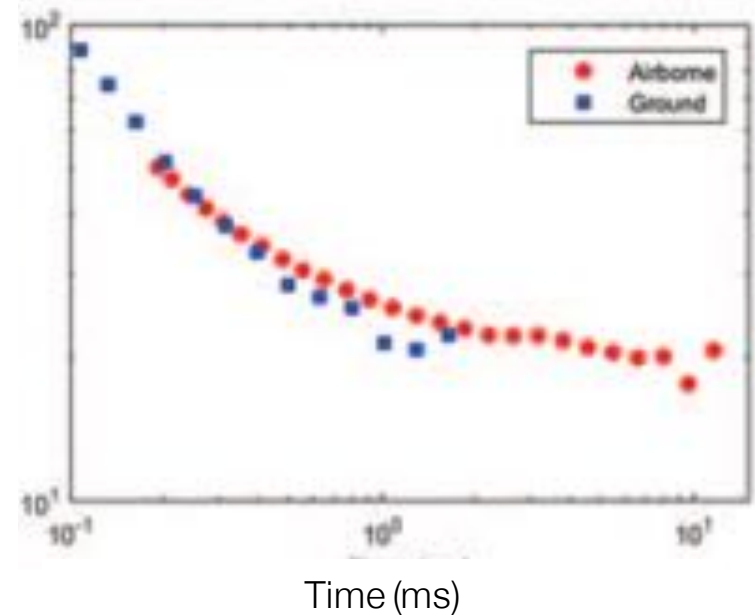


EM data

Apparent resistivity map

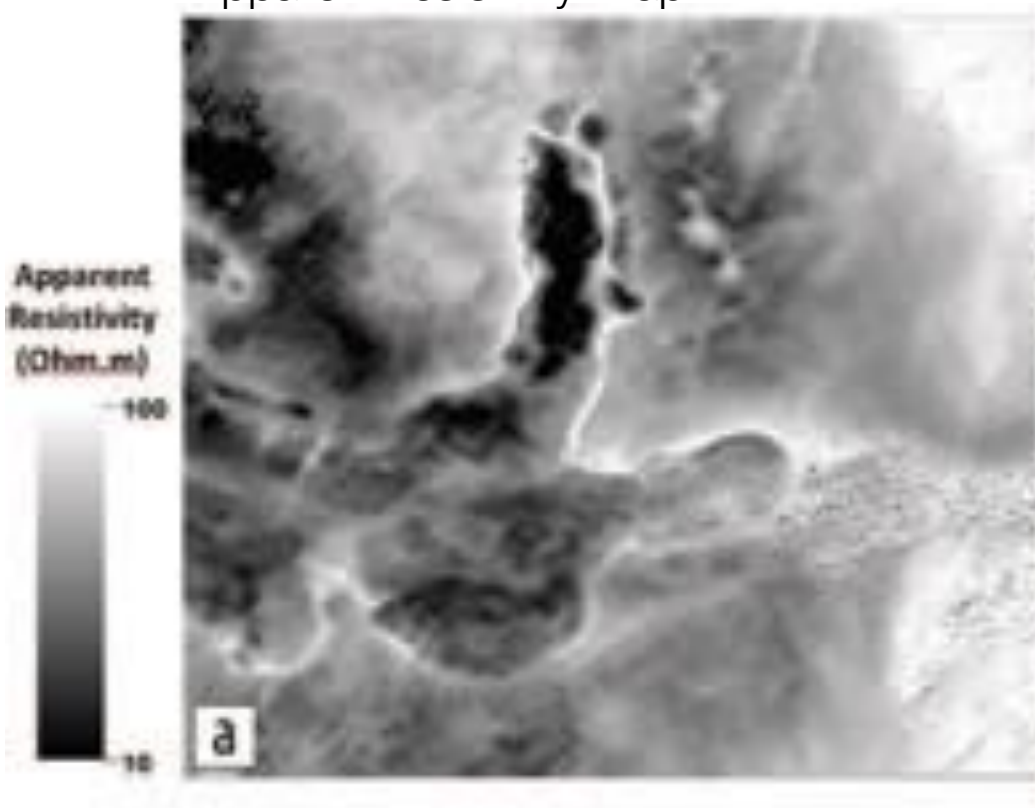


Comparison: EM and Seismic data

Apparent resistivity map

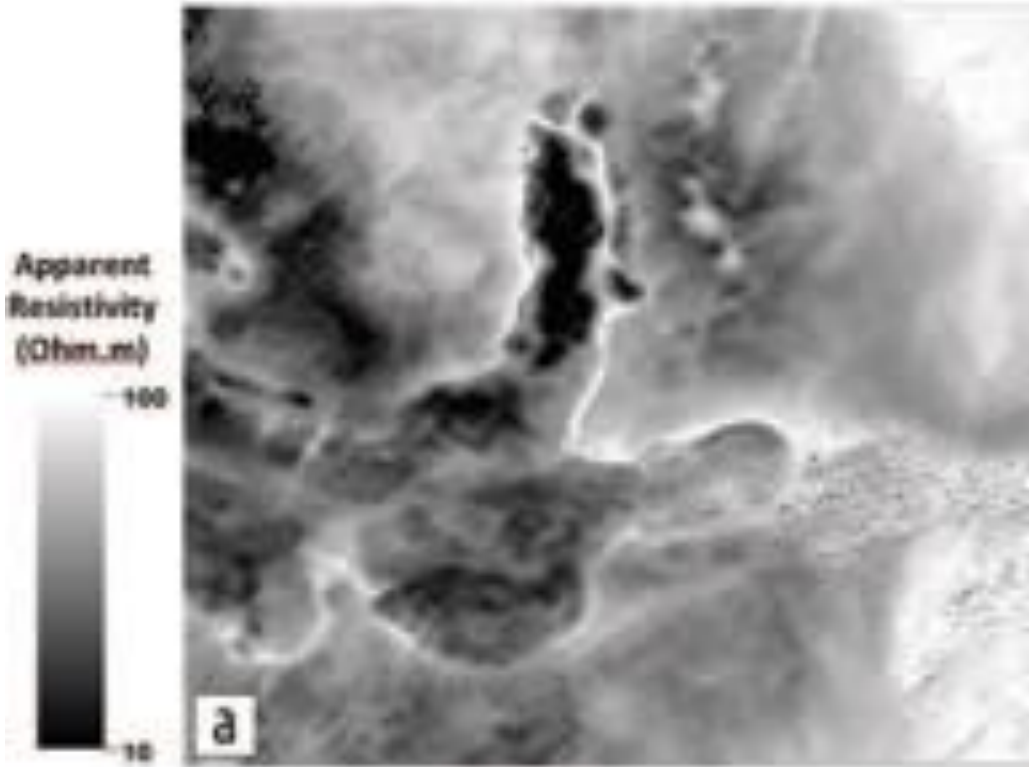


Seismic time slice

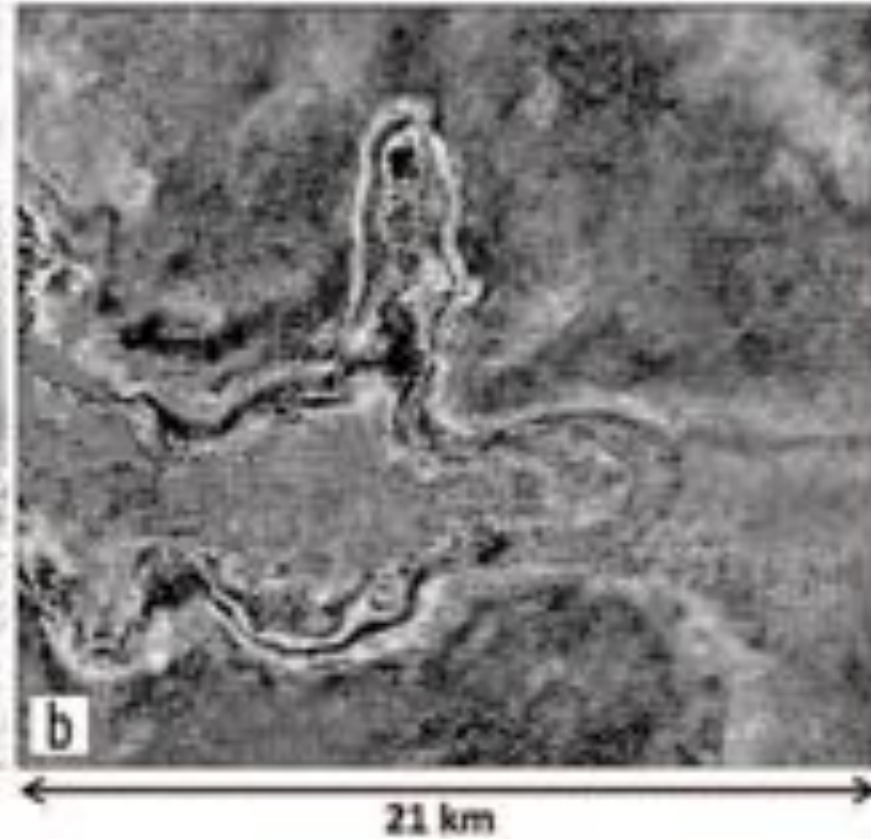

Processing: EM inversion

Conductivity model

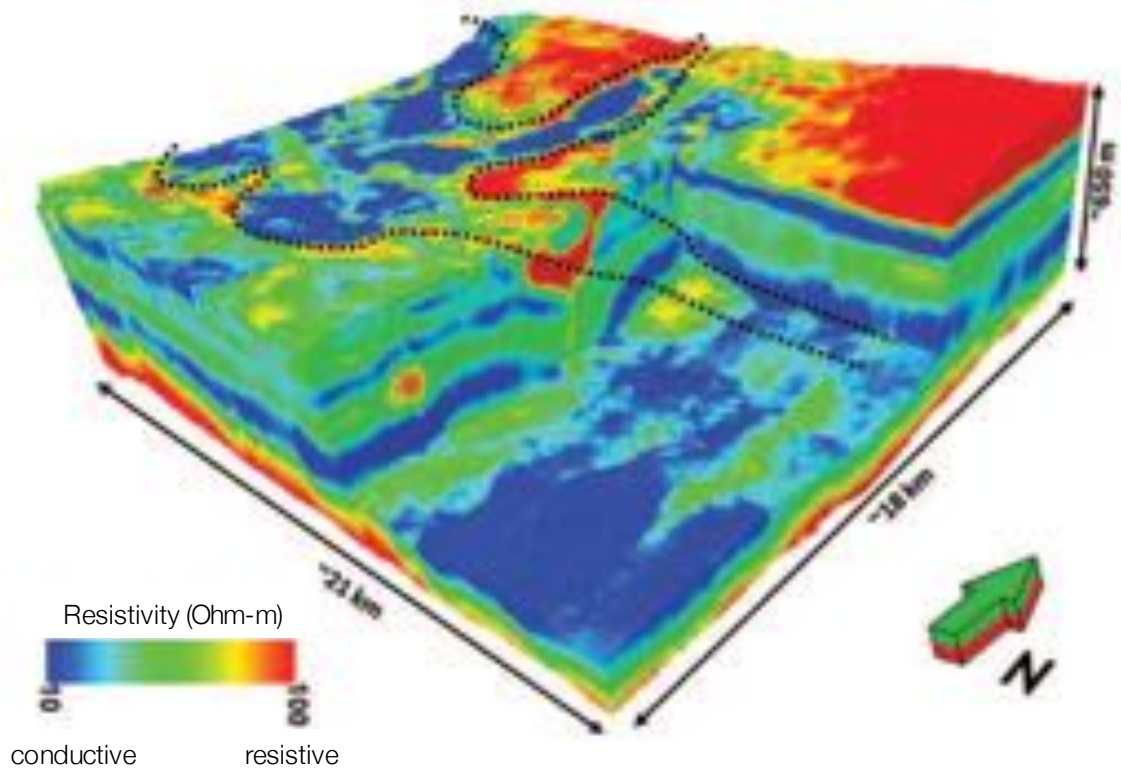

- 1D inversion for each sounding location
- Lateral constraint is used

Cooperative inversion: Seismic + EM

- How **EM** can help seismic tomography inversion?

Velocity (v_p): high to low (significant challenge)

Conductivity (σ): high to low


$$\begin{aligned} v_p &= g(\phi) \\ \sigma &= f(\phi) \end{aligned} \quad \phi: \text{porosity}$$

$\mathbf{m}_s$: Slowness
 $\mathbf{m}_\sigma$: Conductivity

$$\psi(\mathbf{m}_s, \mathbf{m}_\sigma) = \psi_m(\mathbf{m}_s) + \frac{1}{\lambda_1} \psi_d(\mathbf{m}_s) + \underbrace{\frac{1}{\lambda_2} \psi_x(\mathbf{m}_s, \mathbf{m}_\sigma)} + \frac{1}{\lambda_3} \psi_{rp}(\mathbf{m}_s, \mathbf{m}_\sigma)$$


$$\|\nabla \mathbf{m}_s \times \nabla \mathbf{m}_\sigma\|_2^2$$

Gallardo and Meju, 2004

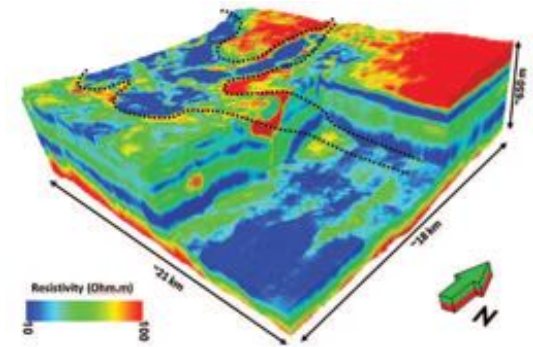

Cooperative inversion: Seismic + EM

V_p depth slices at 340 m below sea level

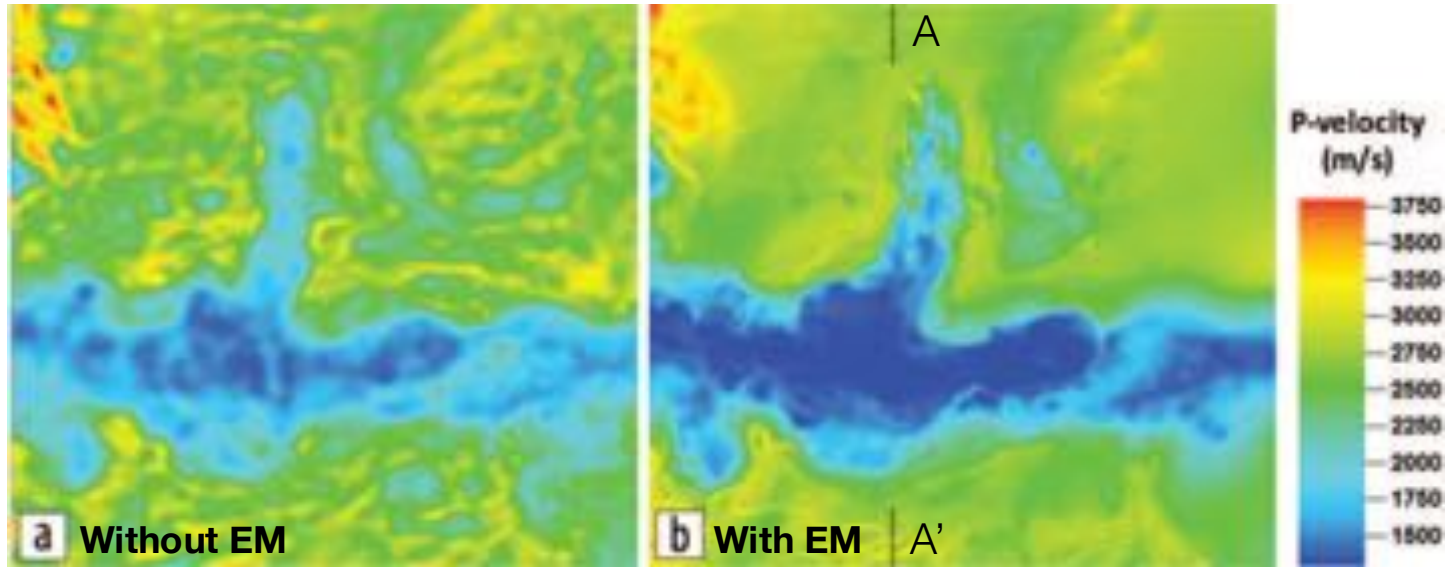


Cross sections at A-A'

Conductivity


v_p **with EM**

v_p **without EM**

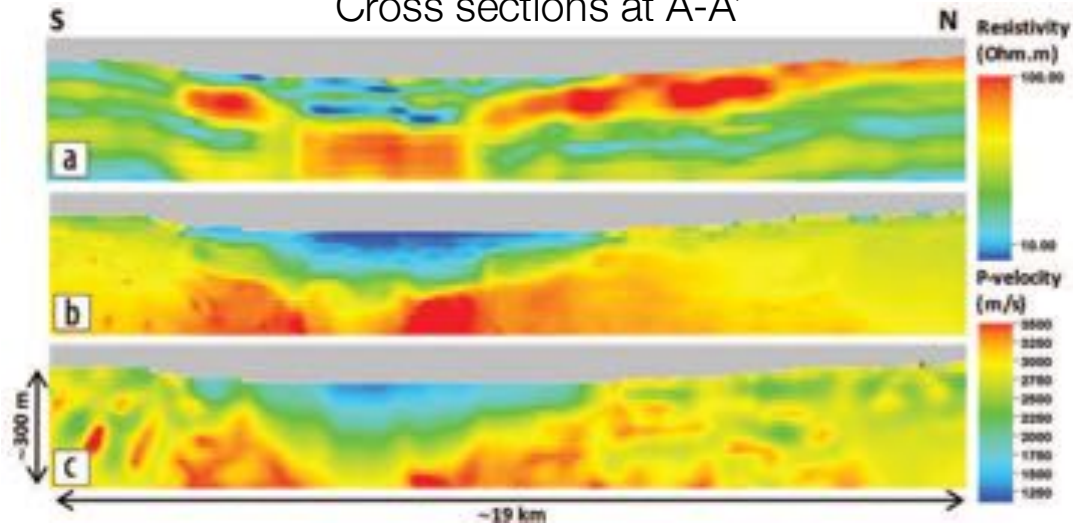


Static correction

Estimated statics on plan map

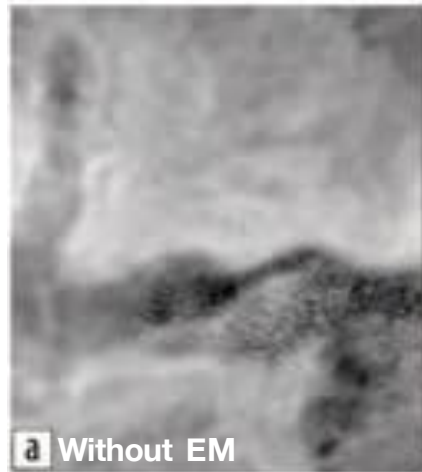


Static corrected sections

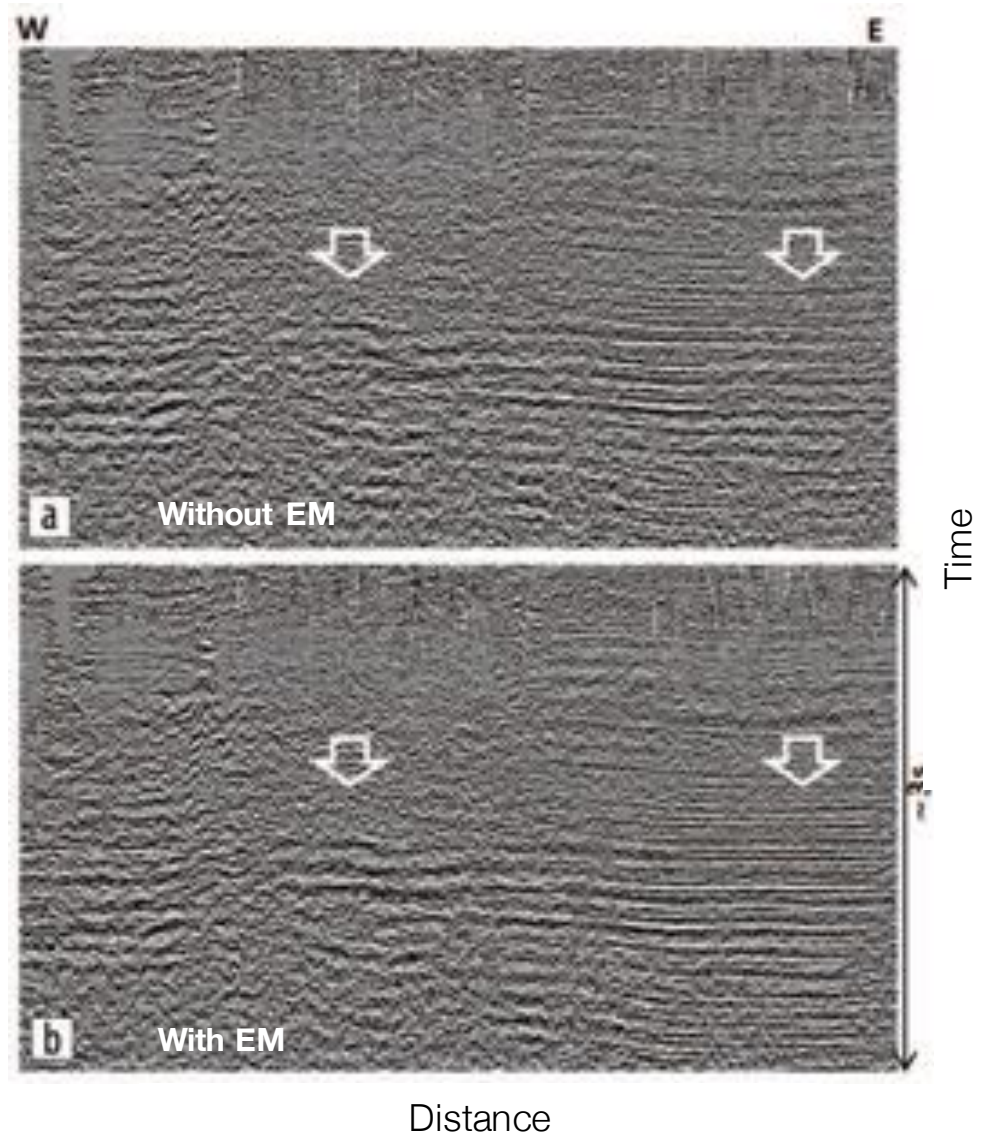


Pre-stack depth migration

- Impact of the improved v_p model to a pre-stack depth migration:

v_p cross sections at A-A'

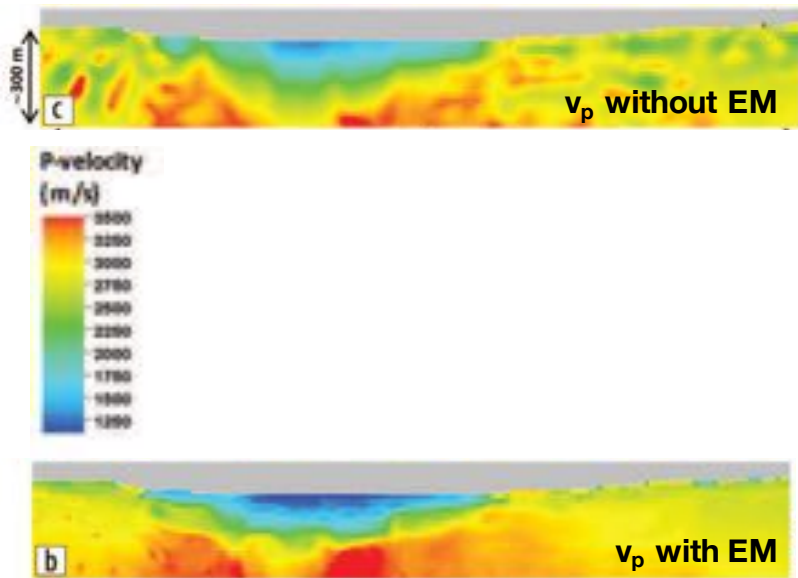


Cross sections at A-A'

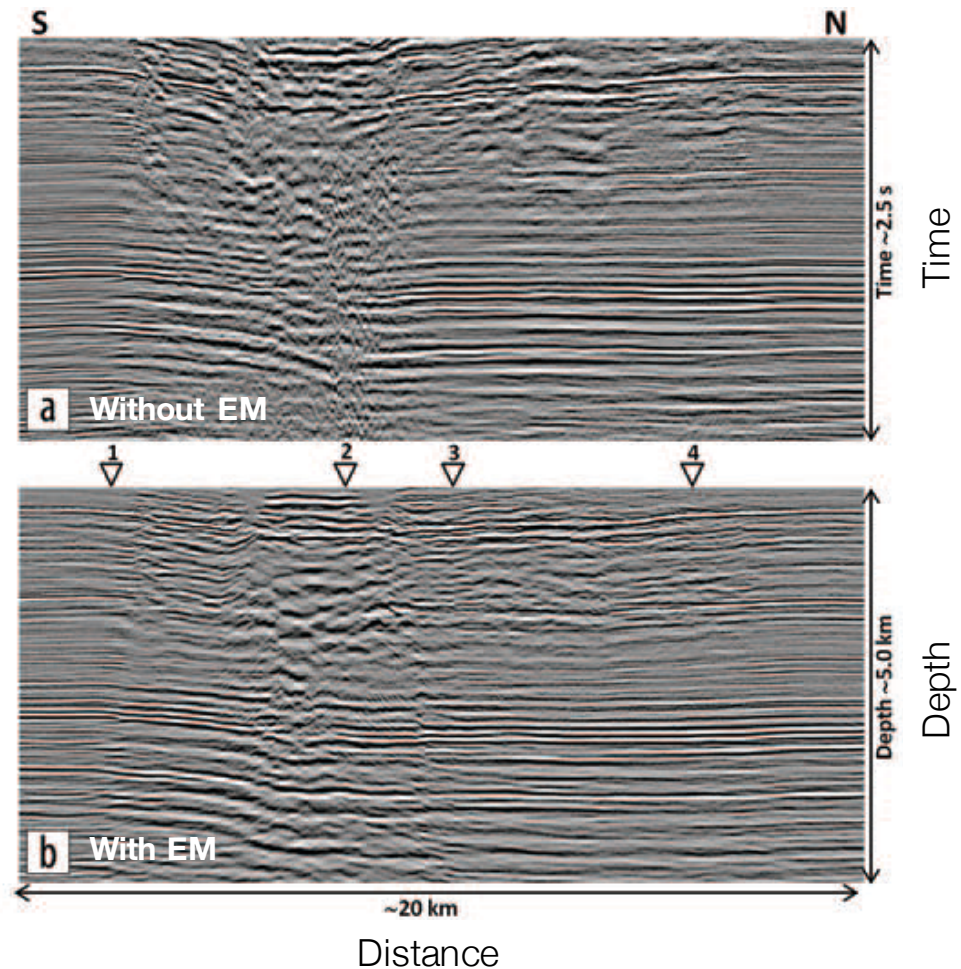


Interpretation and Synthesis

Depth section at A-A'

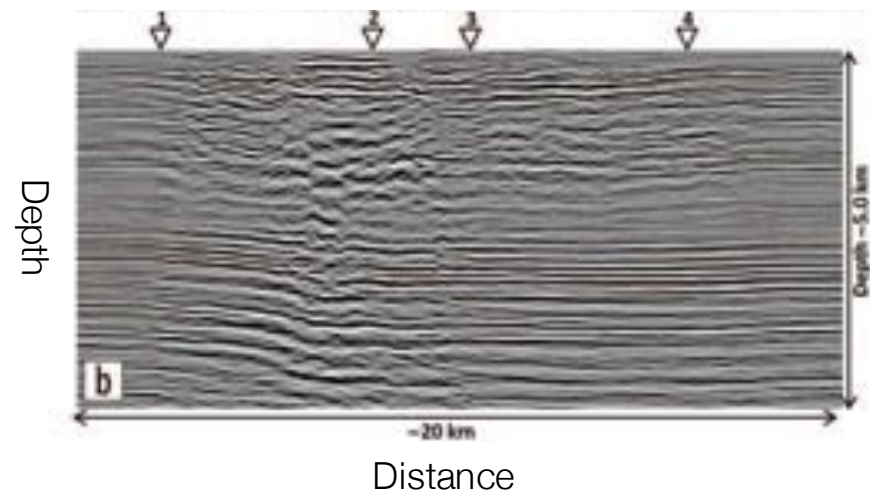


Common image gathers

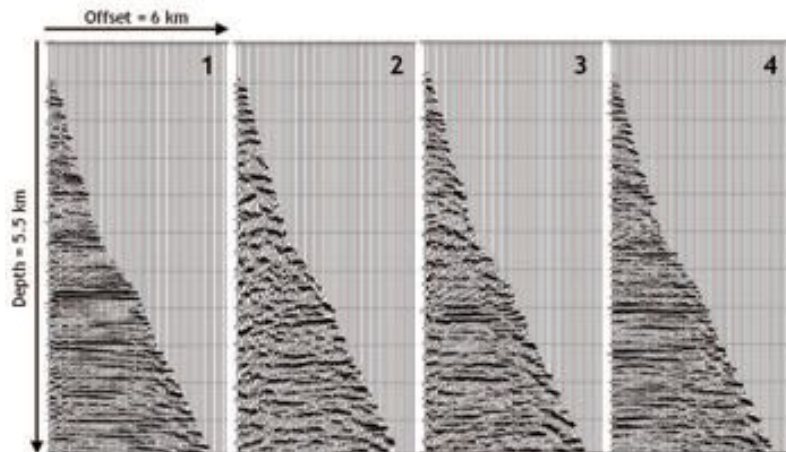


Interpretation and Synthesis


Depth section at A-A'

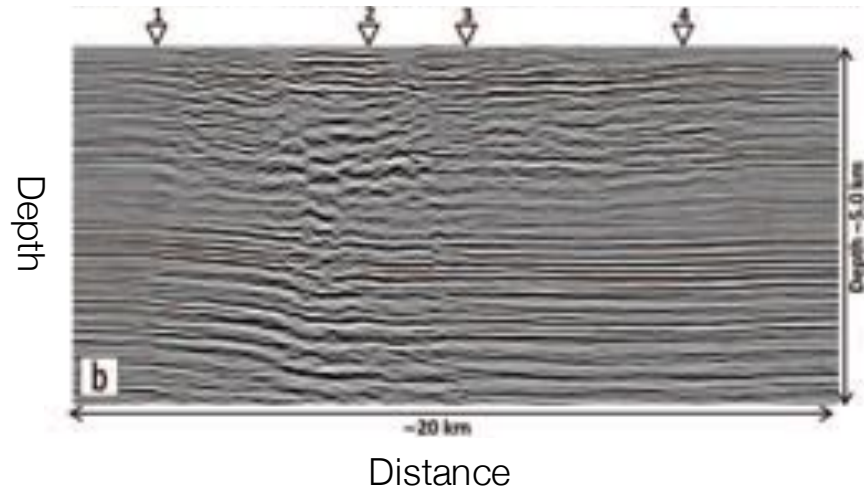

3D prestack depth migration co-rendered with EM

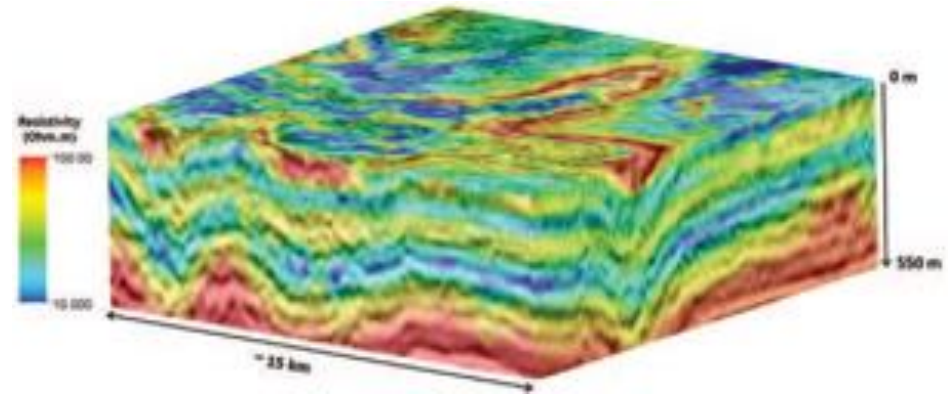




Common image gathers

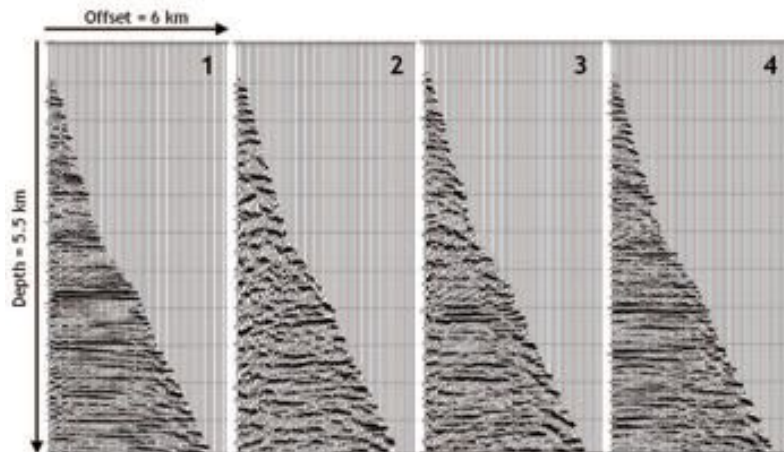

- High resolution near surface conductivity from EM improves velocity model
- Helps seismic imaging:
 - Static correction
 - Pre-stack depth migration

End of Inductive Sources

Next up



DC Resistivity

EM
Fundamentals

Inductive
Sources

Grounded
Sources

Natural
Sources

GPR

Induced
Polarization

The
Future

Lunch: Play with apps



Case History: Kasted

Vilhelmsen et al. (2016)

Setup


A) Survey Area:
Kasted,
Denmark

B) Borehole
locations

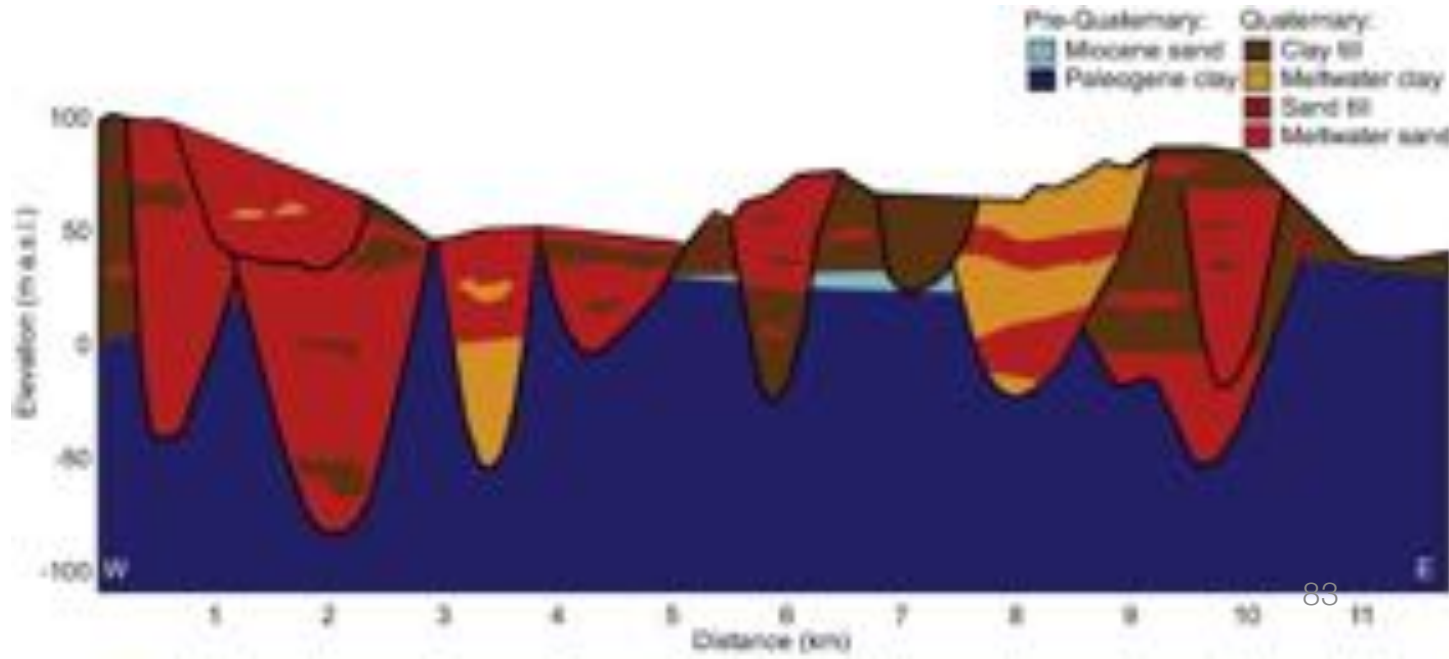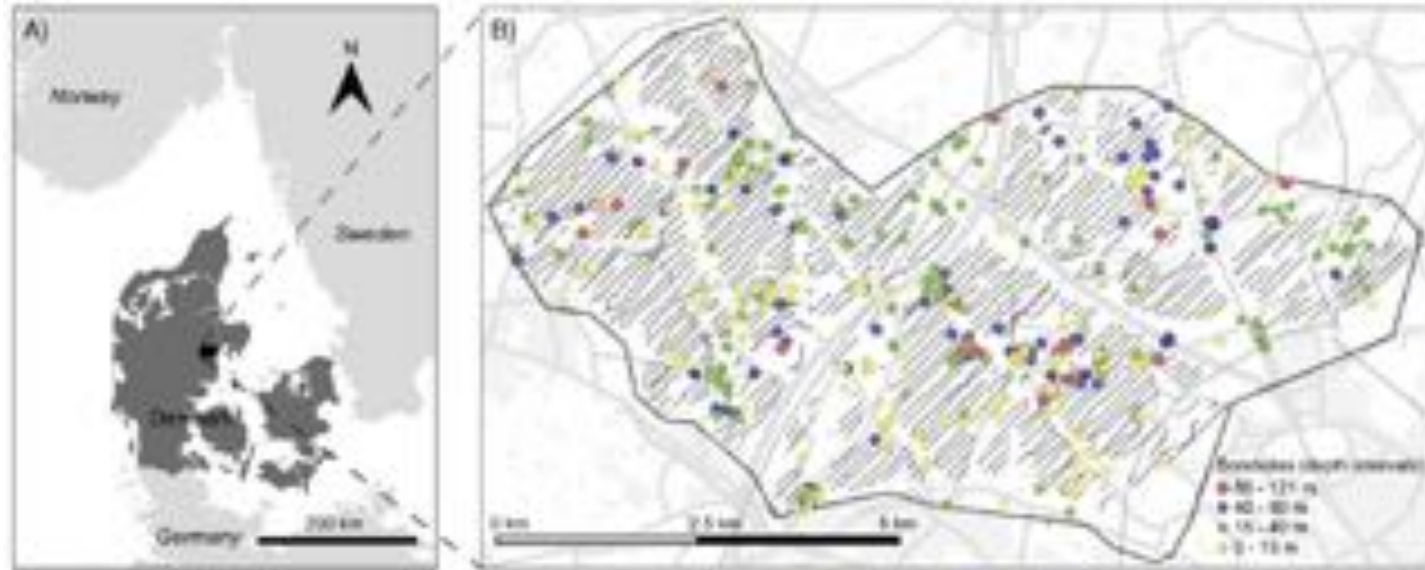

Properties

Geological Cross-Section

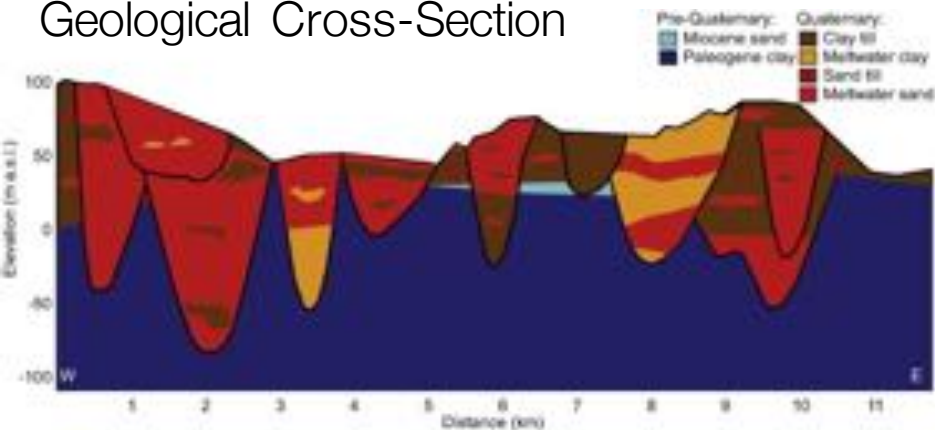


- Buried valleys with clays beneath
- Infill (water-bearing): coarse sand and gravel
- Clays are conductive (1-40 Ωm)
- Water-bearing sands and gravels are more resistive (>40 Ωm)




Geological Units	Resistivity (Ωm)
Palaeogene Clay	1-10
Clay Till	25-60
Sand Till	>50
Meltwater Sand and Gravel	>60
Glaciolacustrine Clay	10-40
Miocene Silt and Sand	>40
Miocene Clay	10-40
Sand	>40
Clay	1-60

Survey

SkyTEM System

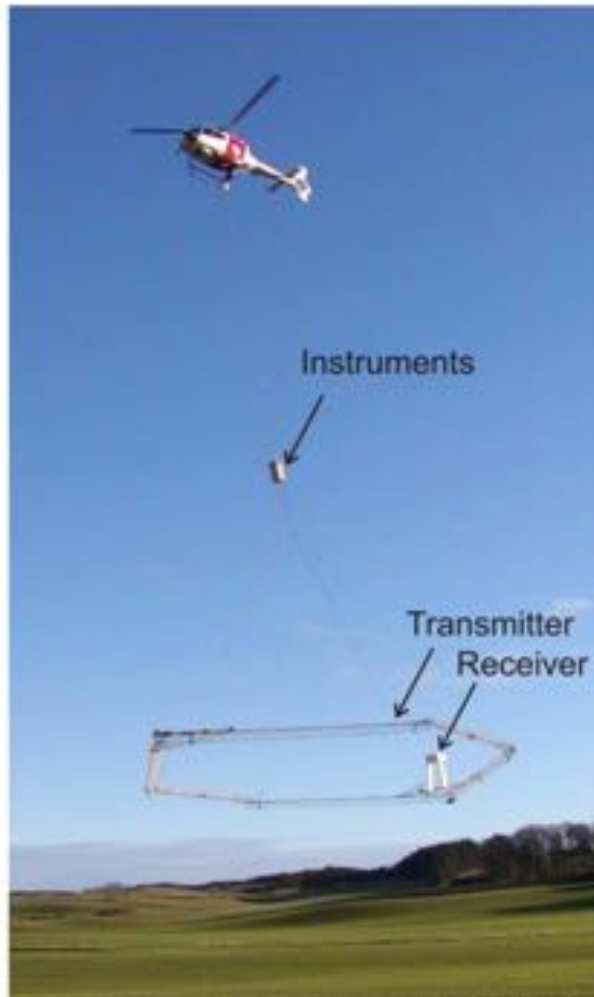


System Configuration

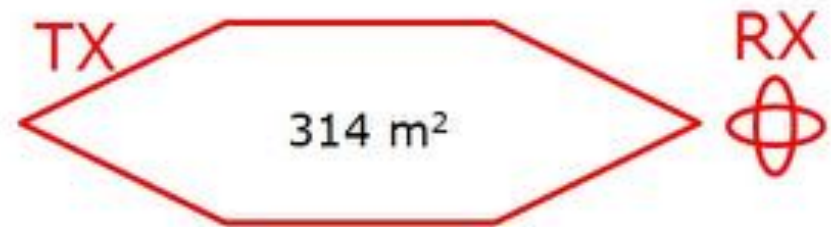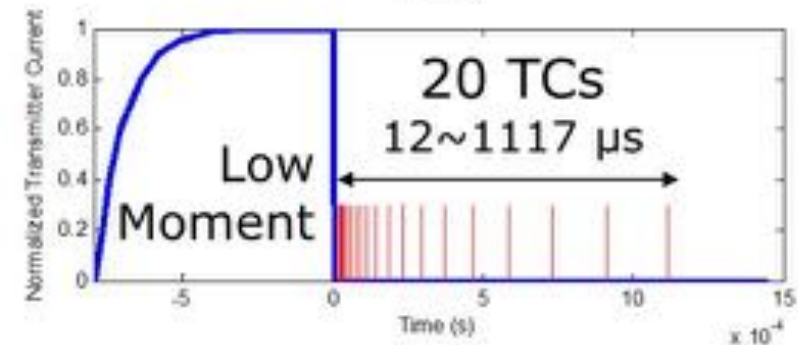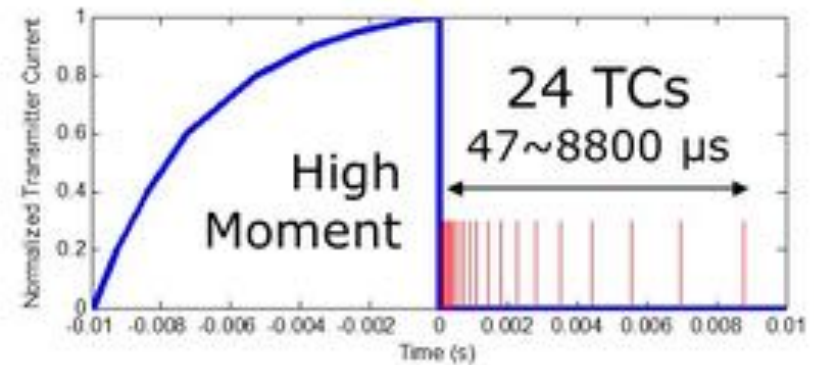

- Low moment (LM) used to image near surface structures
- High moment (HM) used to image deeper structures

Data

Blue: data used for Kasted study

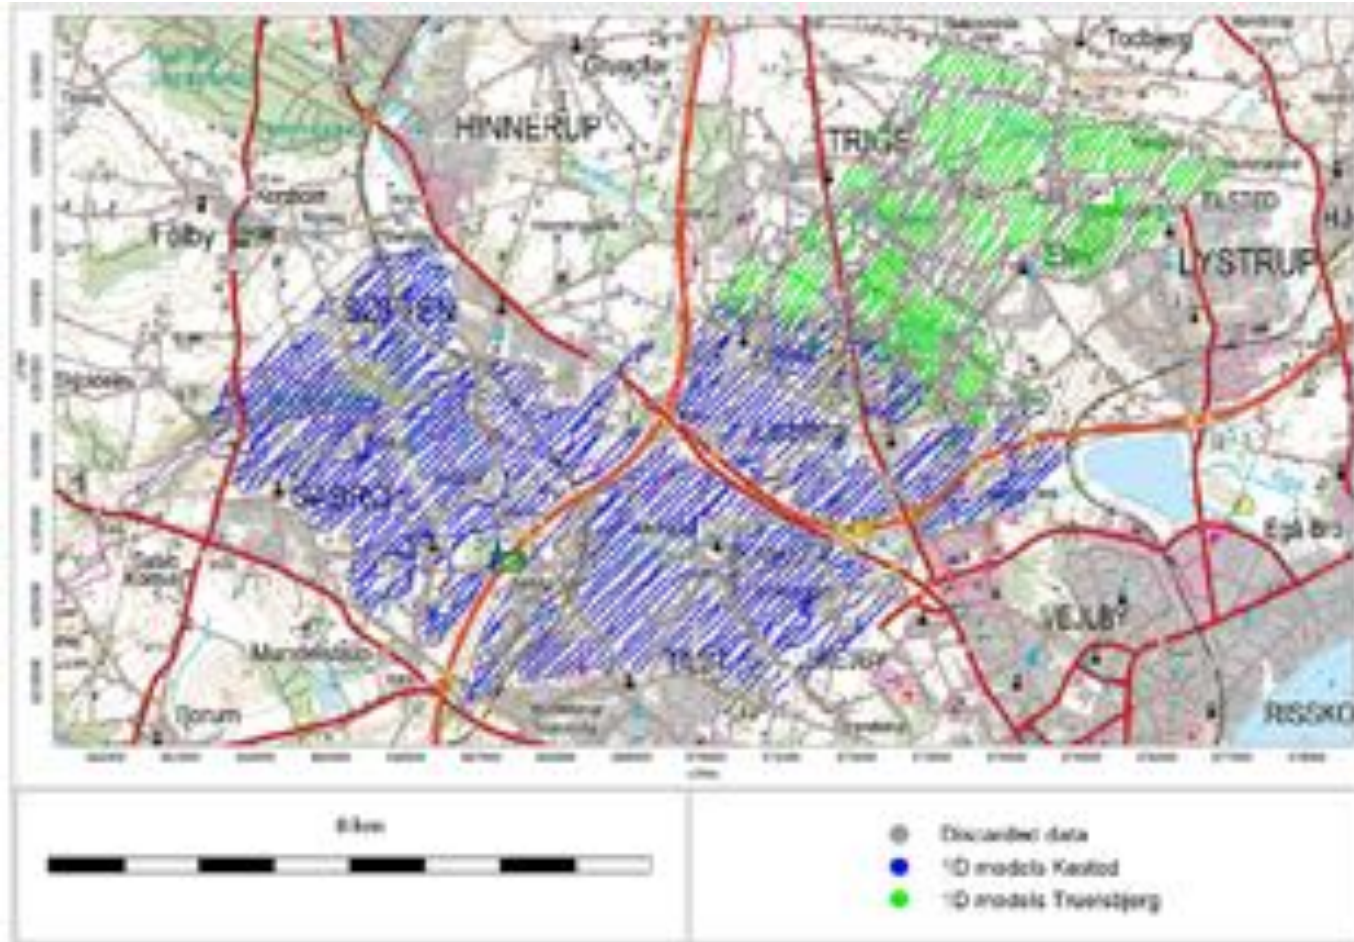


- 333 line km of data, 100 m line-spacing
- Data points with strong coupling to cultural noise were removed (~30%)


Processing (inversion)

- Spatially constrained 1D inversion → quasi-3D approach
- 9,500 soundings were inverted using 25 layers


Depth slice 5 m above sea-level

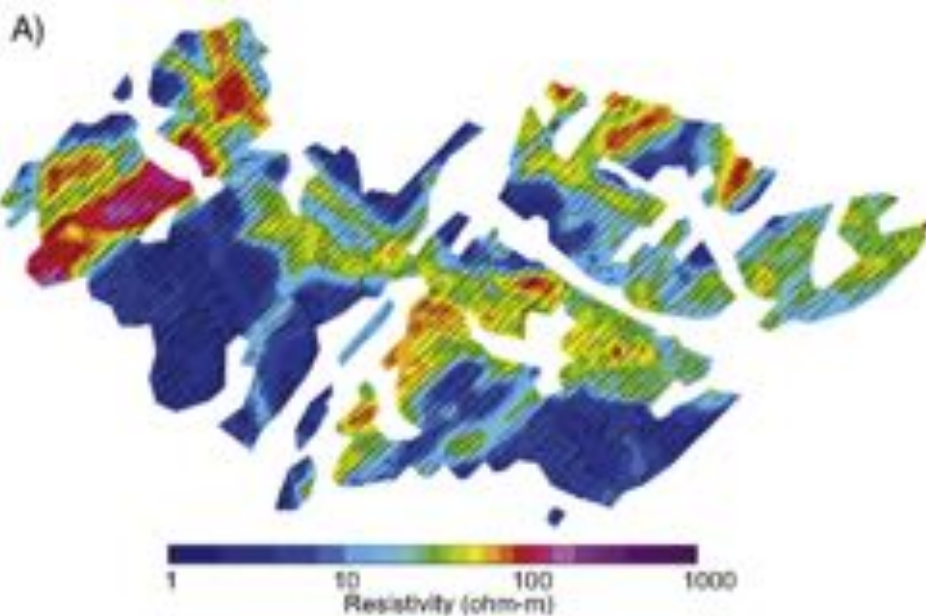


Approximate depth to the top of Paleogene clay layer

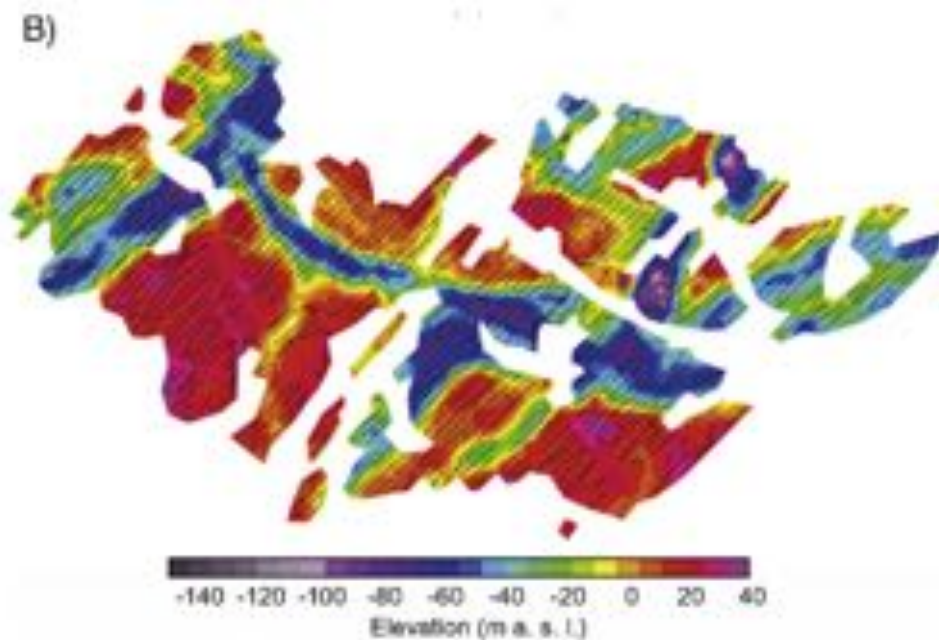

Interpretation

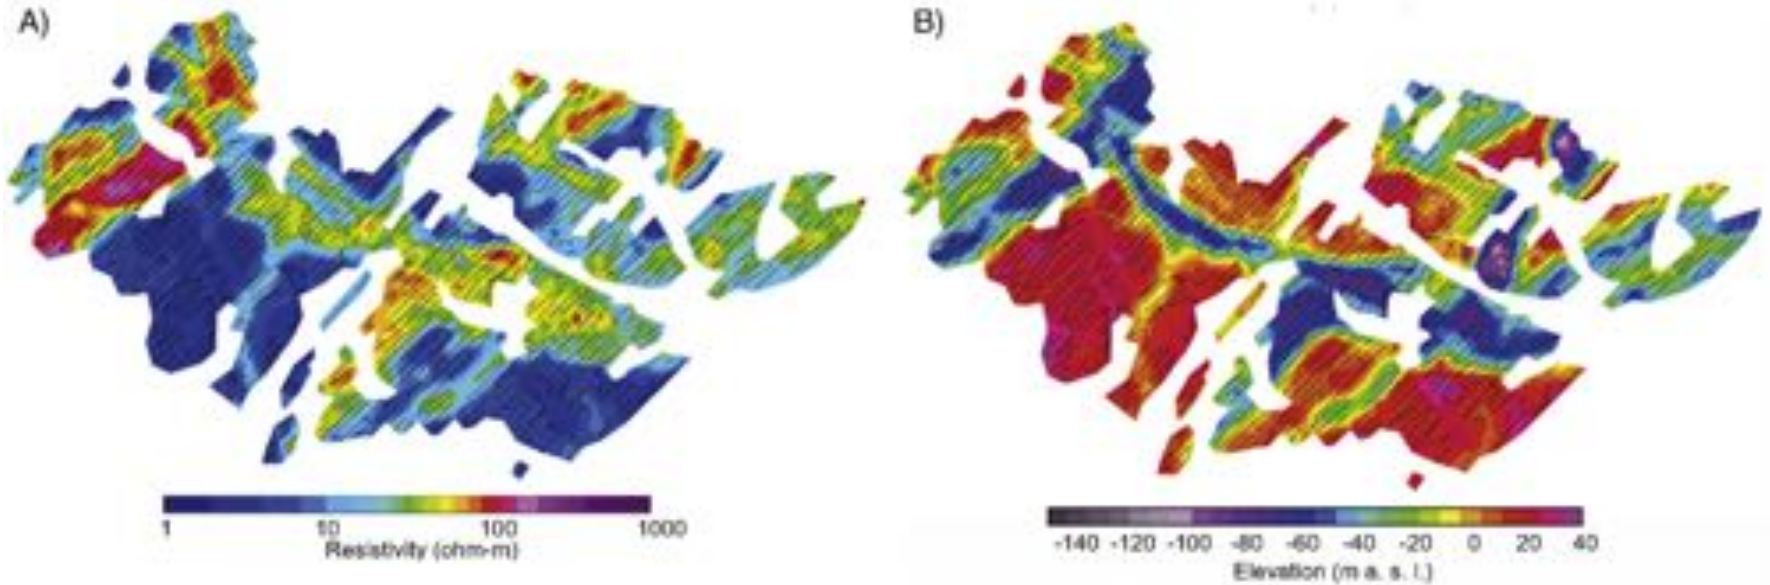


Delineation of valley structures

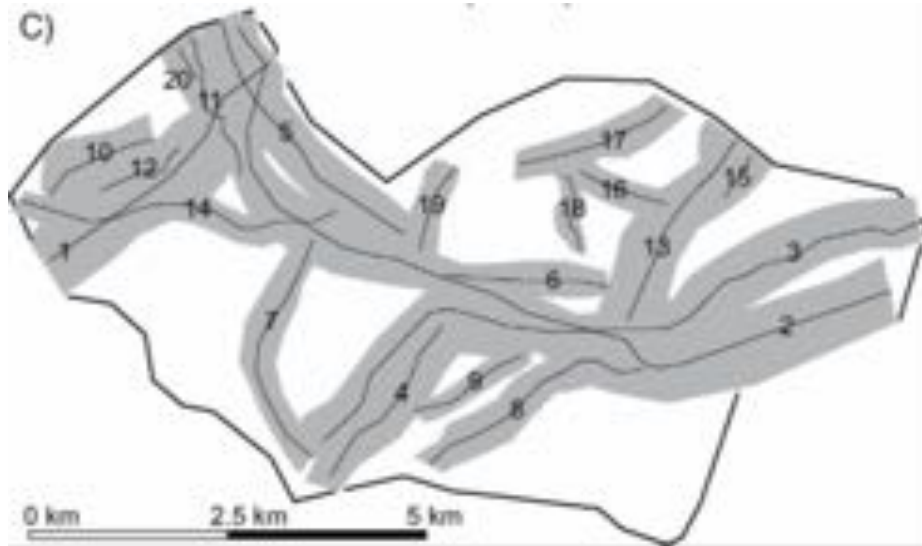


- Inversion results used to construct geological model.
- Delineated 20 buried and cross-cutting valley structures.

Synthesis

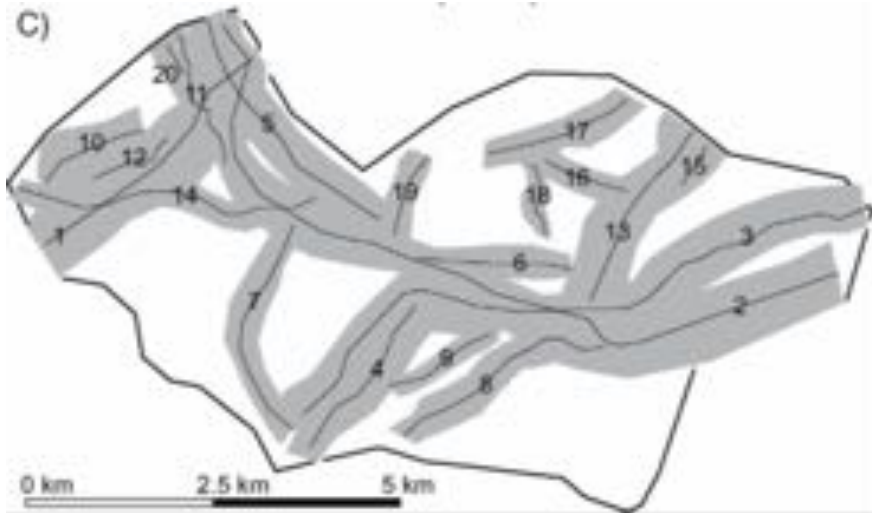

MODFLOW-USG groundwater model

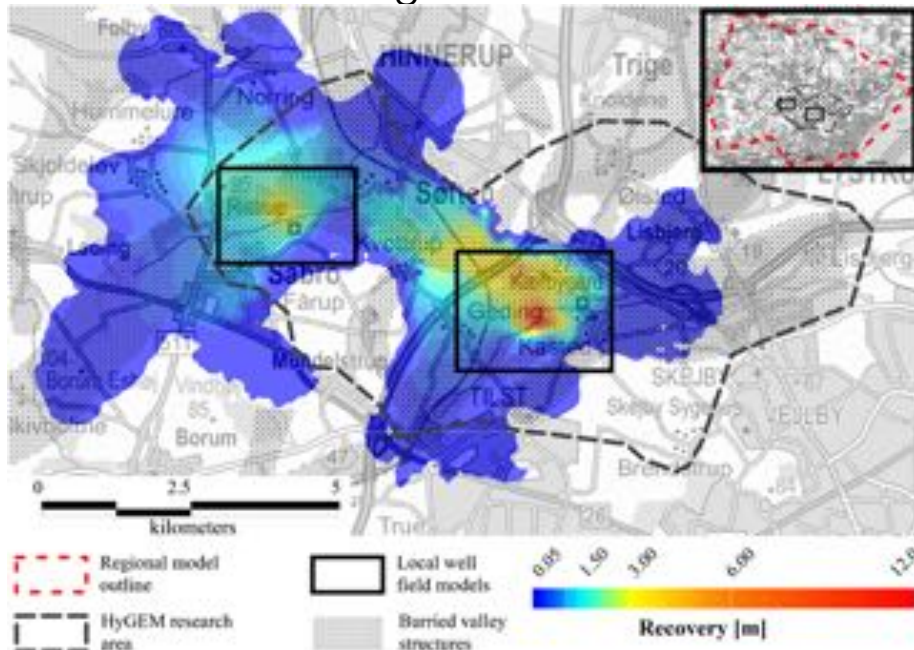

- 3D geologic model incorporated into MODFLOW-USG groundwater modeling tool
- Extracted water from 2 wells.
- Drowndraw between the two wells correlated with the resistive valley structures