



LED Screen Guide

LED Screen Guide for Recharging

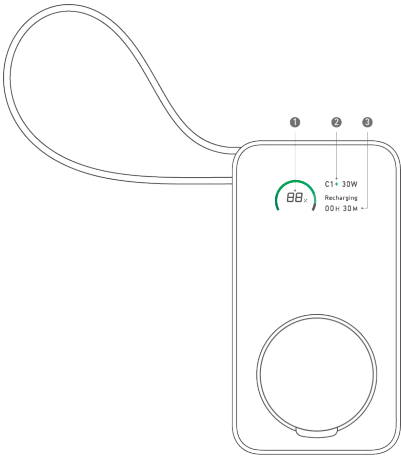

- 1. Remaining Battery Percentage
- 2. Recharging / Input
- 3. Full Recharge Time


LED Screen Guide for Charging

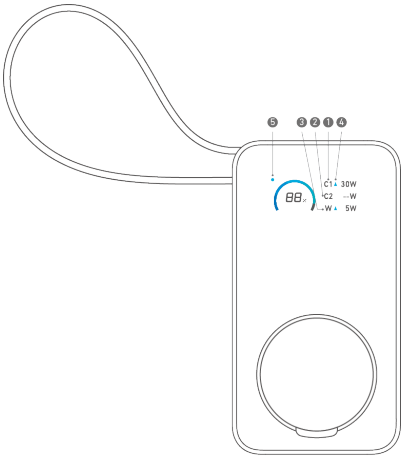


- 1. C1: Built-In USB-C Cable for Input or Output
- 2. C2: USB-C Port for Input or Output
- 3. W: Wireless Charging for Apple Watch
- 4. Charging / Output
- 5. Trickle-charging mode

Screen Diaplay Orientation Switching

- 1. When the screen is on, you can switch the screen display orientation by pressing the power button.

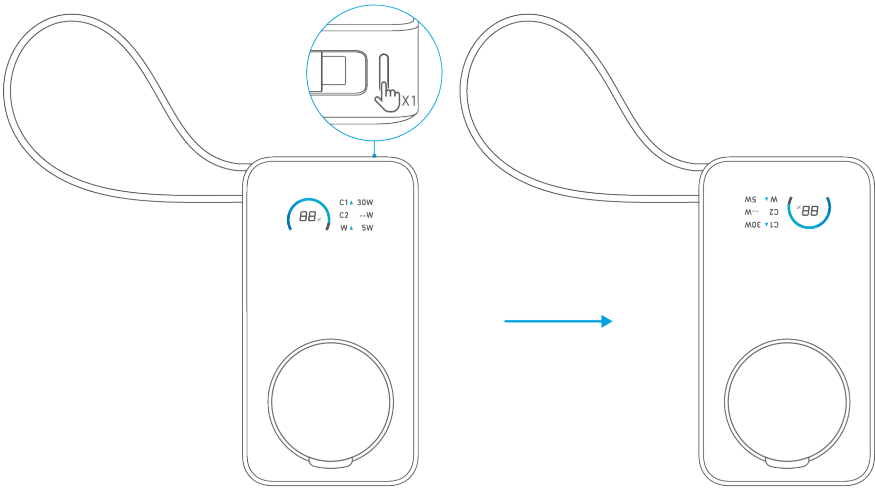


2. When the watch charging stand is opened, the screen will automatically flip.

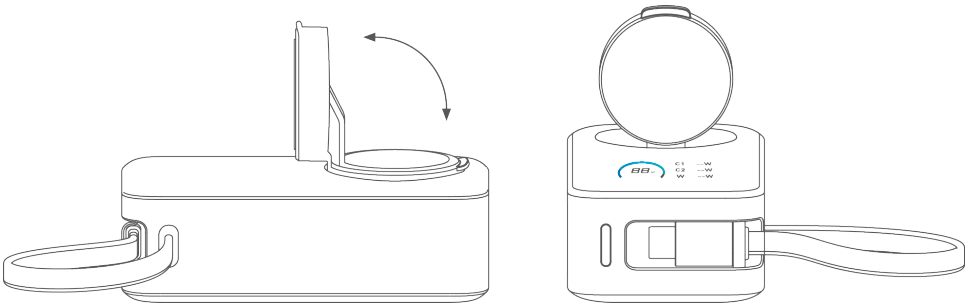

Charging Your Devices

Charge your Apple Watch Wirelessly

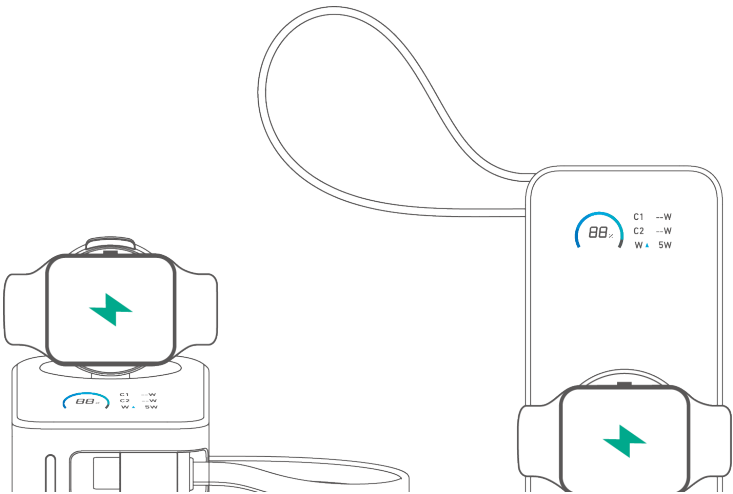

- Notes:
- 1.Only the Apple Watch Ultra and later, as well as the S7 and subsequent series, support fast charging of 5W, while the SE does not.
 - 2.When the watch stand is opened to an angle of 75° – 90°, the watch cannot be charged with a stainless steel strap attached.
 - 3. Wireless charging mode will be turned off approximately 1 minute after removing your Apple Watch from the charger.
 - 4. If your Apple Watch remains on the wireless charger after it has fully charged, the power bank will continue to provide power, though its capacity will naturally decline over time.
 - When the Apple Watch is being charged, its power will fluctuate and may drop below 1W. This is normal.
 - 5. Place your Apple Watch on the wireless charging dial and wait for 2–6 seconds. The wireless charging mode will then automatically activate and charging will begin.


Data Based on Internal Lab Testing

The Original Apple Watch Charger	The watch charges immediately when placed on the charger, and the screen soon enters sleep mode.	A1657: Anker MagGo Power Bank (10K, 35W, For Apple Watch)	The watch begins charging and displays the charging screen as soon as it's placed on the charger.
----------------------------------	--	---	---


		S8	Ultra			S8	Ultra
The charger is active.	The battery level of the watch is 0%.	3.02 s	3.12 s	When the power bank is operational (e.g., charging), a simple press of a button can wake it up.	The battery level of the watch is 0%.	3.20 s	2.91 s
	The battery level of the watch is above 6%.	2.02 s	1.84 s		The battery level of the watch is above 6%.	1.84 s	1.80 s
The charger is off and must be plugged into a power outlet to start charging.	The battery level of the watch is 0%.	6.50 s	6.87 s	The power bank is in standby mode or off. The watch must be powered on to start charging.	The battery level of the watch is 0%.	6.44 s	6.44 s
	The battery level of the watch is above 6%.	4.85 s	4.82 s		The battery level of the watch is above 6%.	5.37 s	5.43 s

Charge your phones, tablets, or laptops with the built-in USB-C cable or USB-C port.


With the Built-In USB-C Cable:

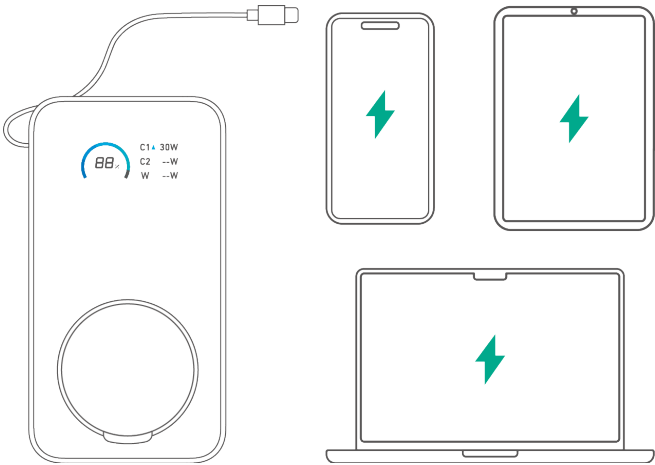

With the USB-C Port:

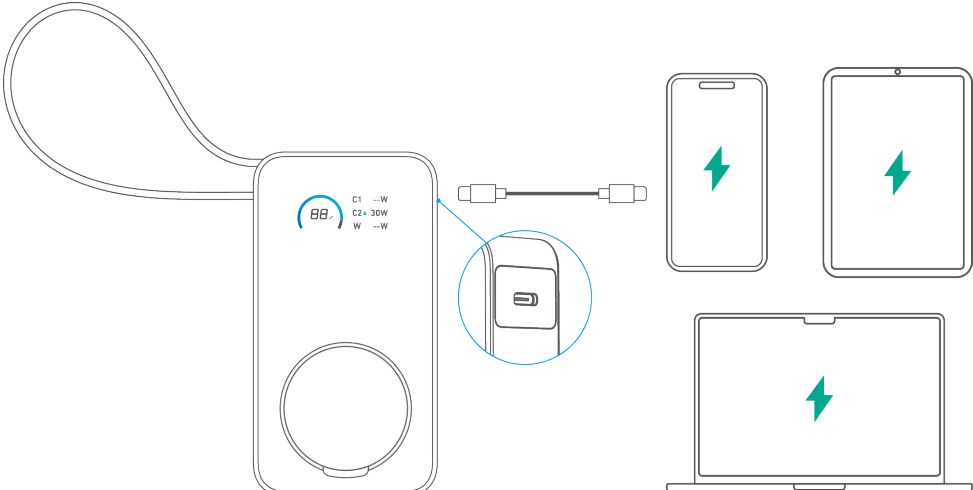


Simultaneously charge your Apple Watch, phones, tablets, or laptops.

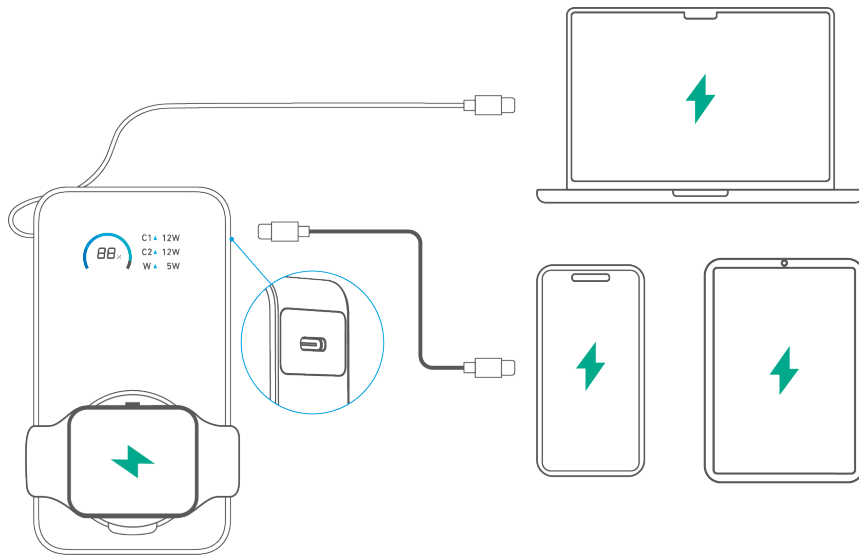


Recharging Your Power Bank

Recharge your power bank with the built-in USB-C cable or USB-C port.

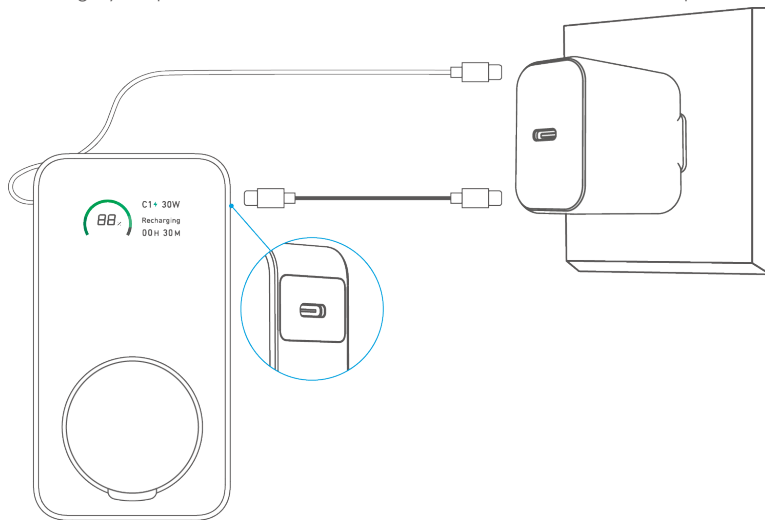

Simultaneous Charging and Recharging


When using the wireless charger with the charging stand open, ensure the watch is placed on it to initiate charging.

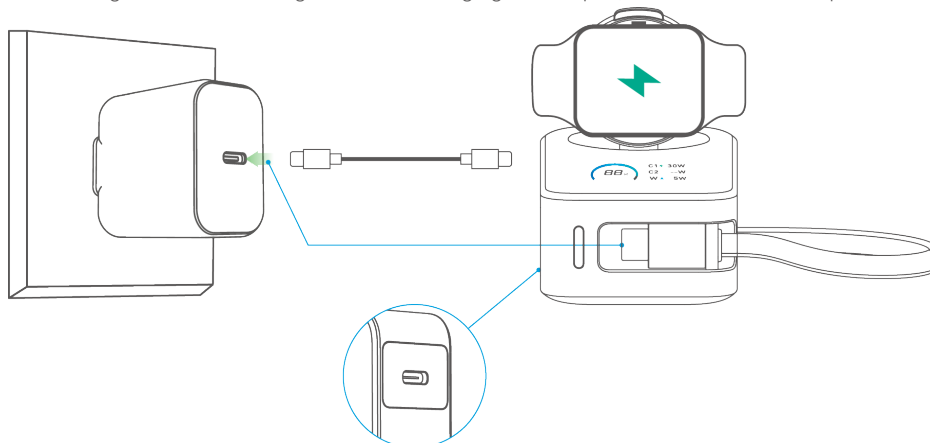


Trickle-Charging Mode

When using the USB-C to Lightning Cable to charge earbuds or other low-power devices, activate trickle-charging mode.


1. Press the button twice to activate trickle-charging mode.

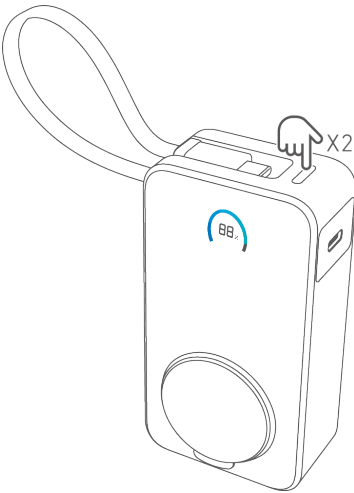

2. Charge your earbuds or other low-power devices using the USB-C to Lightning cable.

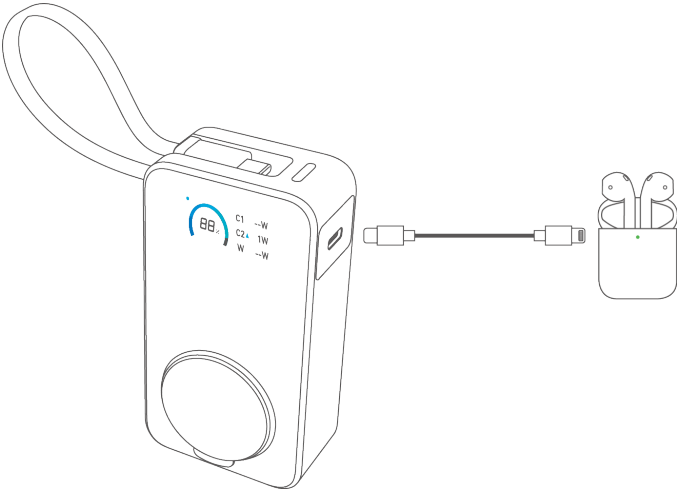

3. Deactivate trickle-charging mode by pressing the power button twice.

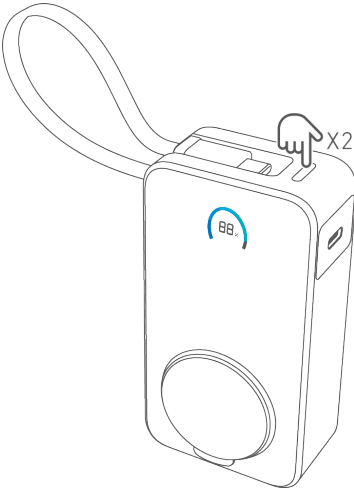

Note: If trickle-charging mode is activated without any low-power devices connected, it will be deactivated to ensure efficient recharging and optimal output via the built-in USB-C cable.

Specifications

Total Capacity	10,000mAh
Battery Capacity	5,000mAh, 7.2VDC / 36Wh (Two Cells in Series)
Input	USB-C Cable / Port: 5V ≡ 3A / 9V ≡ 3A / 12V ≡ 2.5A / 15V ≡ 2A (30W Max)
Output	USB-C Cable / Port: 5V ≡ 3A / 9V ≡ 3A / 10V ≡ 2.25A / 12V ≡ 2.5A / 15V ≡ 2A / 20V ≡ 1.5A (30W Max) Wireless Charger: 5W Max (For Apple Watch)

Total Output	35W Max – USB–C Cable / Port: 30W Max, Watch Wireless Charger: 5W Max – Combined USB–C Cable and USB–C Port: 24W Max (5V ⎓ 4.8A) – Watch Wireless Charger: 5W Max, Combined USB–C Cable and USB–C Port: 24W Max (5V ⎓ 4.8A)
--------------	--