


# Smart Wi-Fi Camera

## Quick start guide

### Appearance introduction

Please learn the camera interface and buttons before you use it .

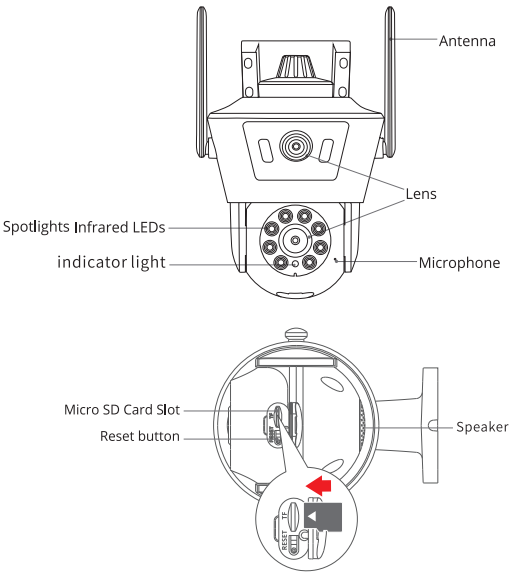

**Note:**  
Long press the reset button to restore factory settings.

### Quick configuration

#### Step 1 Download APP

Tips one: Scan QR code.



Tips two: Search "iCSee" in the App store or Google play to download.

#### Step 2 Power on

Powered on camera, it will make a voice "system starting up, wait be configured" after several seconds, you can make the camera pair network. If the camera does not make the voice for long time, please long-press the camera reset button to restore factory settings.


**Note:**  
If you need local storage, please install the TF card firstly, then power on the device (the TF card does not support hot swapping, please plug and unplug the TF card when the camera is powered off). Cloud storage is recommended, which is safe and convenient. Details See "Step 4" for operation.

### Step 3 Configure the network of the camera

#### Bluetooth network configuration

- 1.Connect your phone to Wi-Fi network and turn on Bluetooth.
- 2.Open the iCSee app, register an account and login(Figure 1).

Figure 1

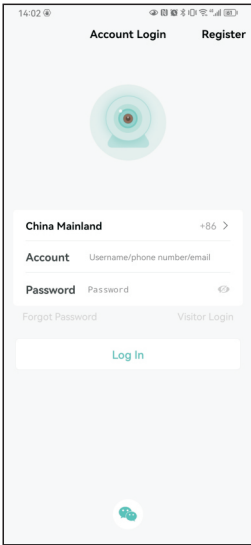

- 3.After successful login, click the "+" button (Figure 2).
- 4.Wait for the device to be added to be found, and click "OK" (Figure 3) .

Figure 2


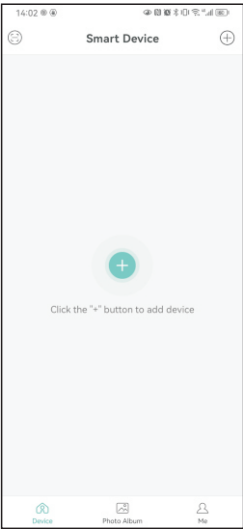


Figure 3

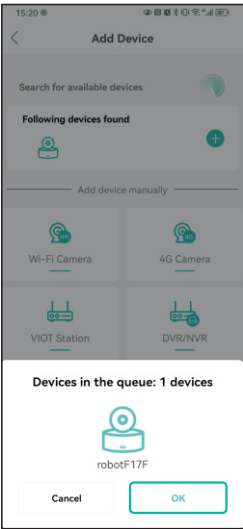

- 5.Enter the Wi-Fi password and click "OK" (Figure 4).
- 6.Wait for the camera network configuration, when the camera issues a "connect successfully" voice prompt, indicating that the network configuration is successful(Figure 5).

Figure 4



Figure 5



- 7.After the network configuration is successful, set the camera name(Figure 6).
- 8.After the configuration is completed, the device is displayed in [Smart Device]. Click to open the real-time preview screen, and do some settings as you want(Figure 7).

Figure 6


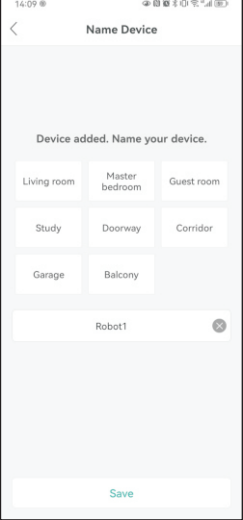


Figure 7

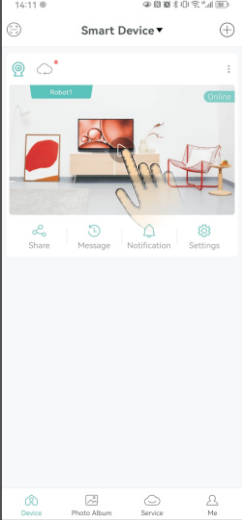

### Wi-Fi network configuration

**Note: If Bluetooth configuration is not successful, please use Wi-Fi network configuration.**

- 1.Connect your phone to Wi-Fi network.
- 2.Login in to the iCSee App, and click the "+" button (Figure 8).
- 3.Click the "Wi-Fi Camera" (Figure 9).
- 4.Set network configuration according to the camera's voice prompts and the APP interface step-by-step guide. when the camera issues a "connect successfully" voice prompt, indicating that the network configuration is successful.

Figure 8


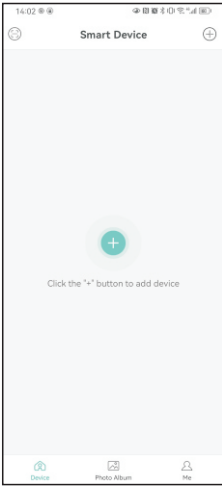


Figure 9

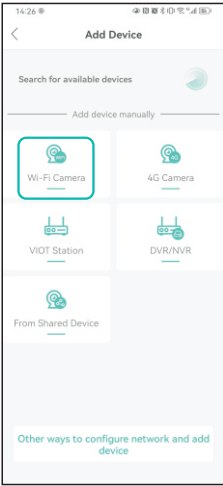

- 5.After the network configuration is successful, set the camera name(Figure 10).
- 6.After the configuration is completed, the device is displayed in [Smart Device]. Click to open the real-time preview screen, and do some settings as you want(Figure 11).

Figure 10


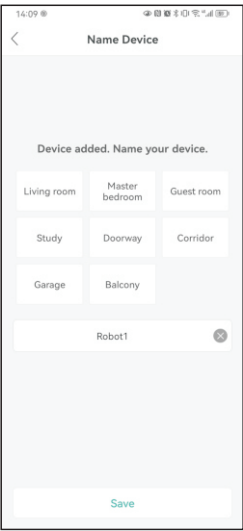



Figure 11

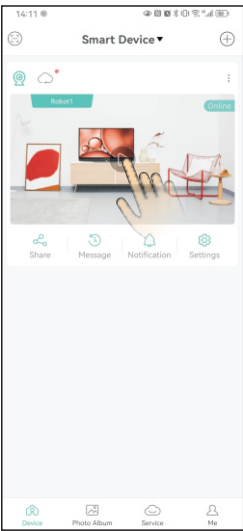

### Step 4 Cloud Storage

Steps to open cloud storage: click the "Service" icon in the device list interface (Figure 12), and follow the guidance of the app interface to buy cloud storage package.

Figure 12

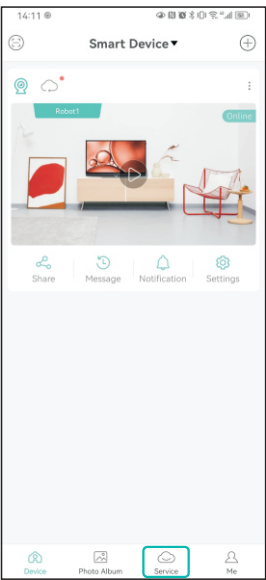

### Common Questions

**Q: How to save camera recordings?**

- A:** 1.Local TF card storage, maximum to 128G. when TF card is full, auto delete older videos, loop record video.  
2.Recommend cloud storage, Alarm video storage to cloud server, real-time push alarm small video, safe and reliable, you can learn more on APP cloud service page.

**Q: What should I do if forget device password?**

**A:** Restore the camera to factory settings, reconnect and set a new password.

**Note:** The access password involves privacy and security, please treat it with caution.

**Q: How to do if the camera is not connected or offline?**

- A:** 1.Check if the camera power or network of router normally .  
2.Plug the camera power to restart camera.  
3.Restore the camera to factory settings.

**Q: Does it support 5G band routers?**

**A:** If 5G band and 2.4G band of your router are the same SSID, you can connect directly. If 5G band and 2.4G band are not the same SSID(2SSIDs, 5G band is XXXXX-5G,2.4G band is XXXXX-2.4G), please make your phone to connect 2.4G SSID(XXXXX-2.4G) wifi signal, and then pair network.

### Notice

1. Please modify the device password right now when the products are turned on.
2. Do not install the device in a place that is damp, dusty, or accessible to children.
3. Please use and store within the allowable temperature and humidity range, and do not disassemble the equipment at will.

### Special explanation

1. It is subject to actual products. Quick start guide is just for reference.
2. APP and device firmware will be updated irregularly. Please update online as needed.
3. If there is any inaccurate item or function explanation mistake or typographical error, please refer to our company explanation.