**xDuoo**

## Bluetooth Transmitter

MX-01
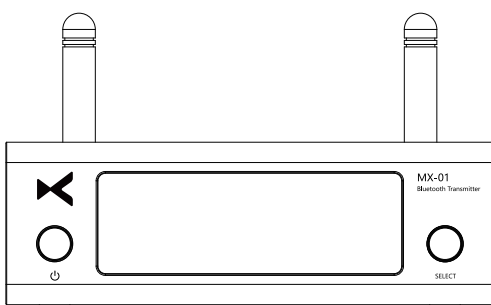Bluetooth Transmitter

SELECT

### About US

For more product information,please visit our
Http://www.xduoo.com
Or scan us directly to enter the offical website

## Introduction

MX-01 is a HIFI Bluetooth audio transmitter, using Qualcomm QCC3056 Bluetooth chip, supporting Bluetooth 5.3, more stable connection and better compatibility. Support USB, optical fiber, coaxial, AUX input, rich audio input interface, by connecting MX-01, amplifiers, televisions, CD players, etc., can be converted into Bluetooth signals and transmitted to Bluetooth headphone, Bluetooth amplifiers, etc., to meet all kinds of wired equipment into wireless audio transmission needs.

## Features

● Built-in Qualcomm's QCC3056 bluetooth chip.
● Support bluetooth 5.3, transmission is more stable.
● Optical and coaxial in support up to 24 Bit/192kHz.
● Supported aptX LL、aptX AD、aptX HD、aptX、AAC、SBC Audio Format.
● Support multiple inputs such as USB, optical fiber, coax and AUX.
● The shell is made of high strength aluminum alloy.
● The external high-gain Bluetooth antenna is used to ensure the lossless and stable signal transmission.

## Operation

MX-01
Bluetooth Transmitter

USB    OPT    SBC    APTX-LL
COA    AUX    AAC    APTX-AD
              APTX   APTX-HD

① ② ③          ④ ⑤ ⑥ ⑦ ⑧

1.Power Key: long press 3 seconds to turn on, and long press  3 seconds to turn off
2.Status bar：displays Bluetooth connection status, Bluetooth format and input channel.
3.Input selection key: short press to select USB\ Coaxial\ Optical \ AUX in, the input name will be displayed on the status bar.
4.AUX in
5.Coaxial in
6.Optical in
7.USB in
8.DC in (5V/1A)
9. Bluetooth antenna: get the Bluetooth antenna from the accessory box and screw it.

## Bluetooth status description

1. Pairing: When turned on, it is in pairing mode. If the device cannot be connected for a long time, press and hold the Select key for 10 seconds to clear the Bluetooth pairing list and re-enter pairing mode.
2.The blue light status symbol indicates that the Bluetooth symbol light flashes slowly when it is not connected; when the connection is successful, the Bluetooth symbol is always on.
3.About the transmitting Bluetooth format: the transmitting Bluetooth format automatically matches the receiving device, and the priority order is aptX LL > aptX AD > aptX HD > aptX > AAC > SBC, and the highest format supported by the transmitting and receiving device.

## Parameters

Power In：DC 5V/1A
Bluetooth version：5.3
Supported Audio Format：aptX LL、aptX AD、aptX HD、aptX、AAC、SBC
Communication Range：about 10 meters

## Accessories

| | |
|---|---|
| TYPE-C cable | *1 |
| Bluetooth antenna | *2 |
| Manual | *1 |
| Warranty Card | *1 |

## Warranty Information

Our products can enjoy 12-month free warranty services from the date of the sale, if the warranty period is expired, our company will charge parts cost depend on the product fault conditions. Accessories are not covered under warranty.

Website