

Reolink Home Hub Pro

Wi-Fi 6 Security Center with 2TB HDD and Advanced Privacy Encryption, Supporting Up to 16TB HDD, 512GB microSD Card, 16 Reolink Cameras, 16MP Live Streaming & Playback, and 24/7 Local Recording.

- Built-In 2TB HDD
- Wi-Fi 6 Ready
- Up to 24 Reolink Cams Supported
- Encrypted Local Storage Without Fees




Specifications

Device Management	
Camera	Up to 24 Cameras (up to 12 wired cameras)
Device Compatibility	All Reolink battery Wi-Fi cameras, Plug-in Wi-Fi cameras, and PoE cameras (Battery cameras require a firmware upgrade)
Safety Protection	Account access and sharing options for individual devices are only available through Home Hub Pro
Input/Output	
HDMI	YES
USB	YES
Reset Button	YES
Power	DC 12V/2A


Speaker	Max.120dB
Ethernet	1 x RJ-45 10/100 Mbps self-adaptive (for WAN),1 x RJ-45, 10/100 Mbps self-adaptive (for IP cameras)
Pamięć masowa	
SATA	YES (1 x 2TB HDD included)
Gniazdo karty microSD	Up to 512GB*1
Storage Encryption	AES-128 encryption algorithm
Preview & Playback	
Live View	App, PC Client
Playback	Smart playback/event history
Wi-Fi	
Standard bezprzewodowy	IEEE 802.11 a/b/g/n/ac/ax
Częstotliwość pracy	2.4/5 GHz
Ochrona bezprzewodowa	WPA/WPA2/WPA3
Sub-1 GHz	
Operating Frequency	868/915MHz
System	
Network Protocols	TCP/IP, UDP, DHCP, P2P, UPNP, RTSP,RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	11 users (1 admin account & 10 shared accounts)
Smart Home	Google Assistant
Środowisko pracy	
Temperatura pracy	-10°C~+45°C
Wilgotność pracy	10%~90%
Mechaniczny	

Wymiary	185*133*222mm
Waga	1096g
Gwarancja	
Ograniczona gwarancja	2-year limited warranty

Gallery & Specs

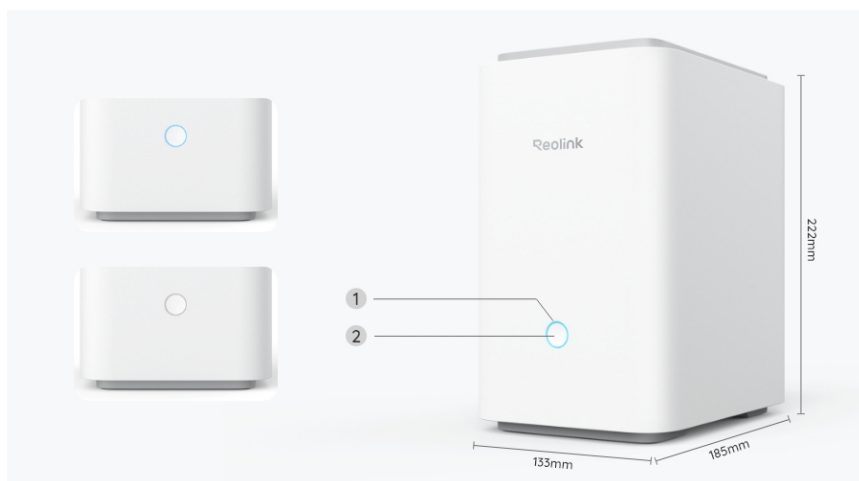

1. Indicator LED
2. Power Button

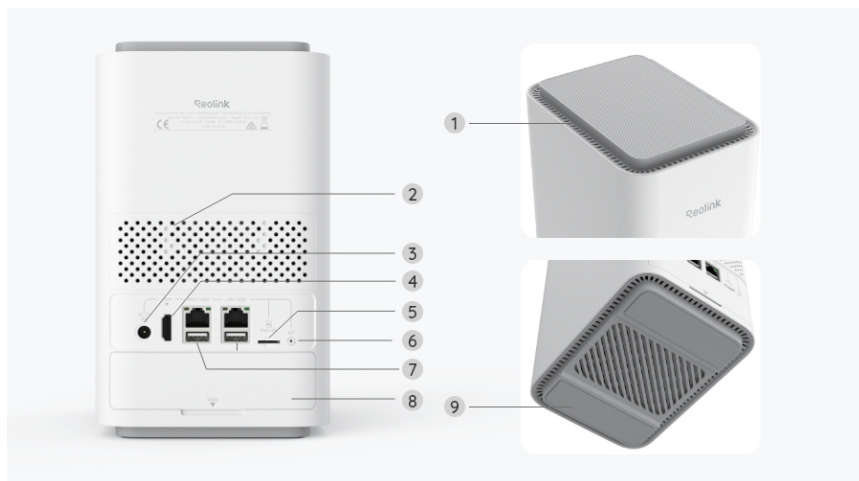

1. Ventilation Holes
2. Speaker
3. DC Input Port
4. HDMI Port
5. microSD Card Slot
6. Reset Button
7. USB Port
8. Hard Drive Bay
9. Silicone Pads

www.reolink.com