

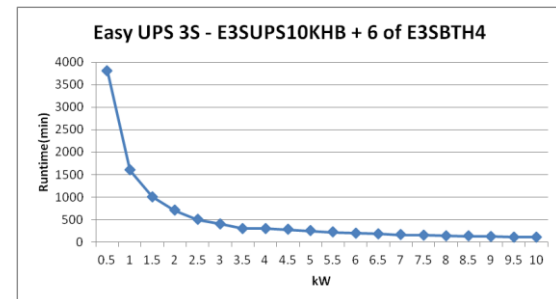
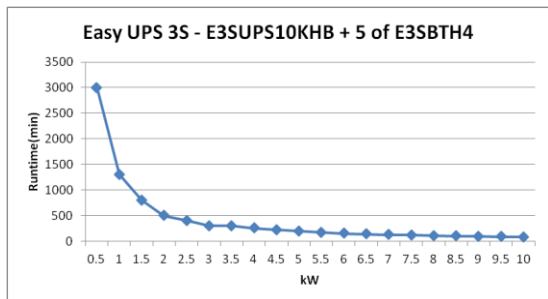
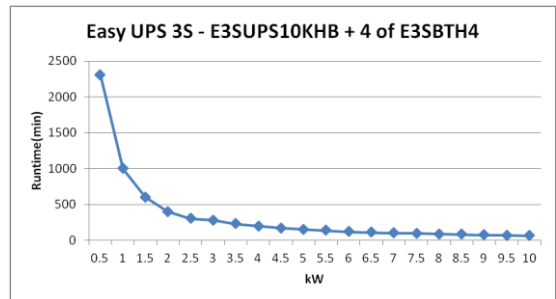
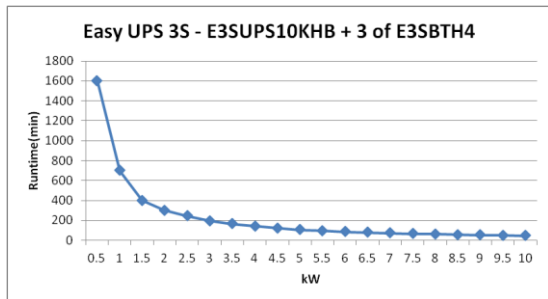
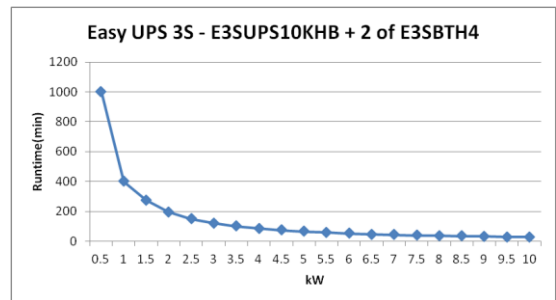
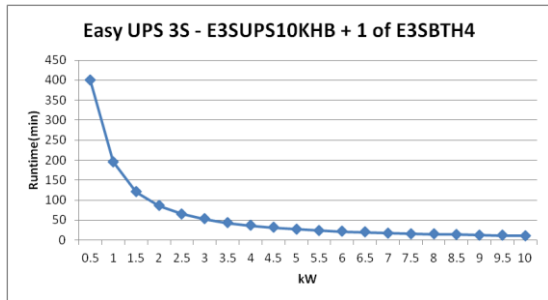
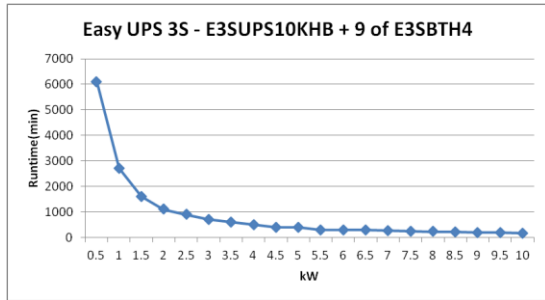


# Easy UPS 3S - 10kVA – Runtime Table

## UPS with battery of E3SBTH4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS10KHB/ E3SUPS10K3IB +			E3SUPS10KHB/ E3SUPS10K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4
5%	0.5	0.5	400	1000	1600	2300	3000	3800	4500	5300	6100
10%	1	1	195	400	700	1000	1300	1600	2000	2300	2700
15%	1.5	1.5	120	275	400	600	800	1000	1200	1400	1600
20%	2	2	85.5	195	300	400	500	700	800	1000	1100
25%	2.5	2.5	65	150	245	300	400	500	600	700	900
30%	3	3	52.5	120	195	280	300	400	500	600	700
35%	3.5	3.5	43	100	165	230	300	300	400	500	600
40%	4	4	36.5	86	140	195	255	300	300	400	500
45%	4.5	4.5	31.5	74.5	120	170	225	280	300	300	400
50%	5	5	27.5	65.5	105	150	195	245	295	300	400
55%	5.5	5.5	24	58	95.5	135	175	220	265	300	300
60%	6	6	21.5	52	86	120	155	195	235	280	300
65%	6.5	6.5	19.5	47	78	110	140	180	215	250	290
70%	7	7	17.5	43	71	100	130	160	195	230	265
75%	7.5	7.5	16	39.5	65.5	93	120	150	180	210	245
80%	8	8	14.5	36.5	60.5	86	110	140	165	195	225
85%	8.5	8.5	13.5	34	56	80	100	130	155	180	210
90%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195
95%	9.5	9.5	11.5	29	48.5	69	91	110	135	160	185
100%	10	10	10.5	27.5	45.5	65	85.5	105	125	150	170






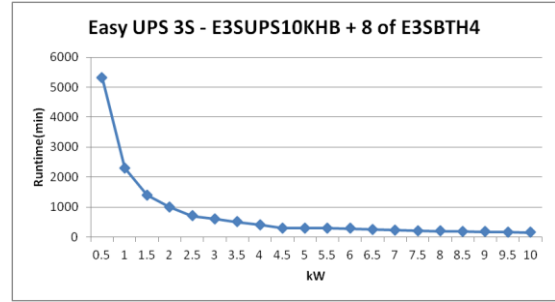




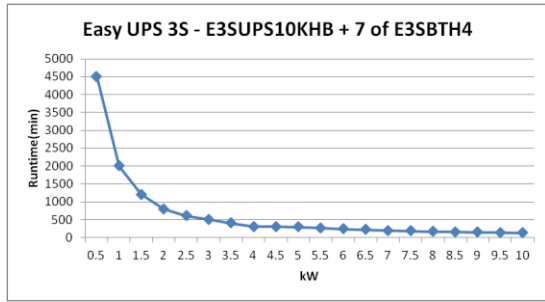


# Easy UPS 3S - 10kVA – Runtime Table

## UPS with battery of E3SBT4

% of load	kVA	kW	Runtime estimation in minutes								
			E3SUPS10KHB1/ E3SUPS10K3IB1 or E3SUPS10KHB/ E3SUPS10K3IB +1 of E3SBT4	E3SUPS10KHB2/ E3SUPS10K3IB2 or E3SUPS10KHB/ E3SUPS10K3IB +2 of E3SBT4	E3SUPS10KHB2/ E3SUPS10K3IB2 +1 of E3SBT4 or E3SUPS10KHB/ E3SUPS10K3IB +3 of E3SBT4	E3SUPS10KHB/ E3SUPS10K3IB + 1 of E3SXR6					
						4 of E3SBT4	5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4
5%	0.5	0.5	300	900	1400	2000	2700	3400	4000	4800	5500
10%	1	1	170	300	600	900	1100	1400	1700	2000	2400
15%	1.5	1.5	100	240	300	500	700	900	1000	1200	1400
20%	2	2	73	170	275	300	500	600	700	900	1000
25%	2.5	2.5	55	130	210	300	300	400	500	600	800
30%	3	3	44	100	170	240	300	300	400	500	600
35%	3.5	3.5	36	86.5	140	200	260	300	300	400	500
40%	4	4	30.5	73	120	170	220	280	300	300	400
45%	4.5	4.5	26	63	100	145	190	240	290	300	300
50%	5	5	22.5	55.5	91.5	130	170	210	255	300	300
55%	5.5	5.5	20	49	81.5	115	150	190	225	265	300
60%	6	6	17.5	44	73	100	135	170	205	240	280
65%	6.5	6.5	15.5	39.5	66	94.5	120	155	185	220	250
70%	7	7	14	36	60	86	110	140	170	200	230
75%	7.5	7.5	13	33	55	79	100	130	155	185	210
80%	8	8	11.5	30	51	73	96	120	145	170	195
85%	8.5	8.5	10.5	28	47	68	89.5	110	135	155	180
90%	9	9	9.9	26	44	63	83.5	100	125	145	170
95%	9.5	9.5	9.1	24	40.5	58.5	77.5	97	115	135	155
100%	10	10	8.4	22.5	38.5	55	73	91.5	110	130	150

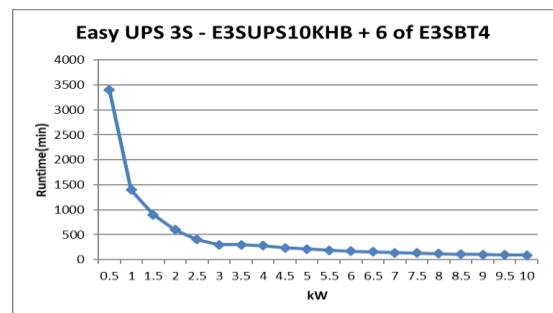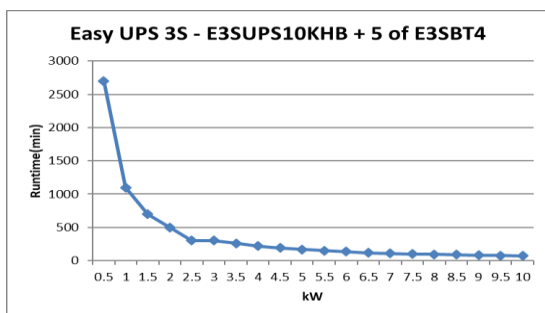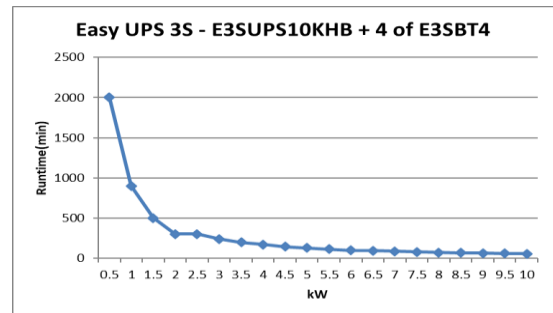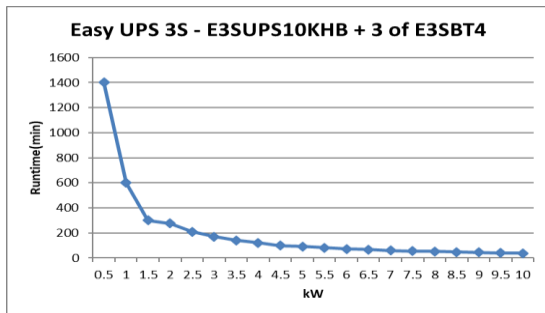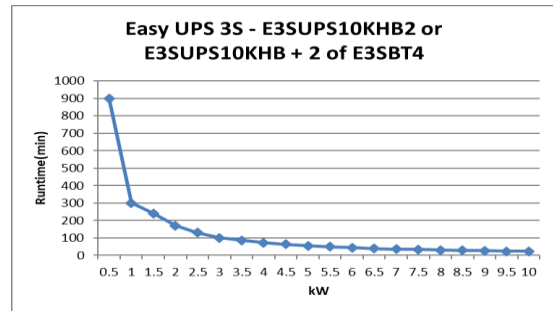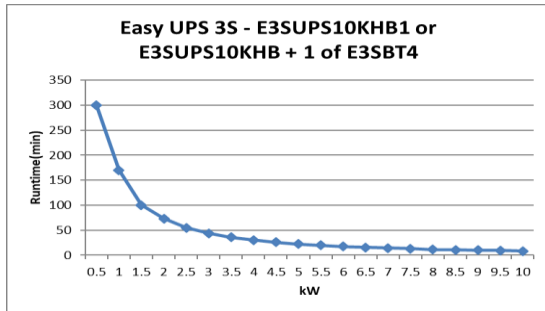

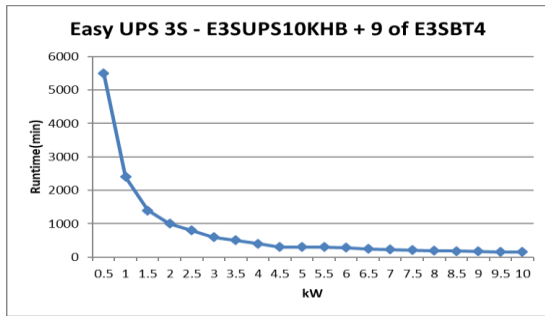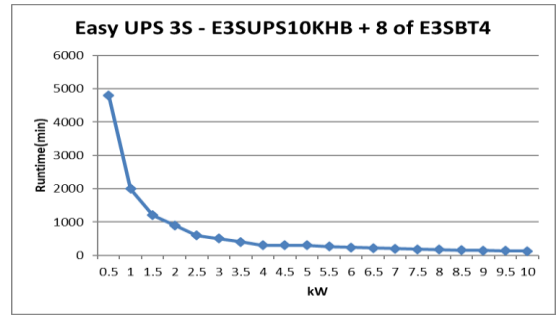
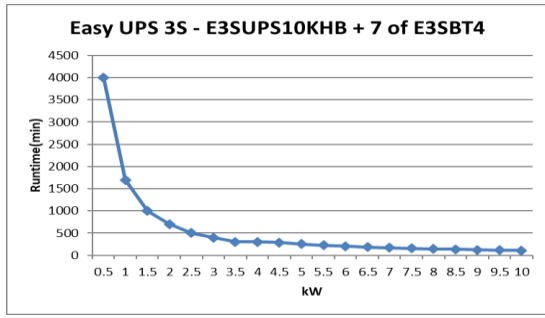












# Easy UPS 3S - 15kVA – Runtime Table




## UPS with battery of E3SBTH4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS15KHB/ E3SUPS15K3IB +			E3SUPS15KHB/ E3SUPS15K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4
5%	0.75	0.75	280	600	1000	1400	1900	2300	2800	3300	3800
10%	1.5	1.5	120	275	400	600	800	1000	1200	1400	1600
15%	2.25	2.25	74.5	170	280	300	500	600	700	900	1000
20%	3	3	52.5	120	195	280	300	400	500	600	700
25%	3.75	3.75	39.5	93	150	210	280	300	400	400	500
30%	4.5	4.5	31.5	74.5	120	170	225	280	300	300	400
35%	5.25	5.25	25.5	61.5	100	140	185	230	275	300	300
40%	6	6	21.5	52	86	120	155	195	235	280	300
45%	6.75	6.75	18.5	45	74.5	105	135	170	205	240	280
50%	7.5	7.5	16	39.5	65.5	93	120	150	180	210	245
55%	8.25	8.25	14	35	58	82.5	105	135	160	190	220
60%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195
65%	9.75	9.75	11	28.5	47.5	67.5	88.5	110	130	155	180
70%	10.5	10.5	10	26	43	61.5	81	100	120	140	165
75%	11.3	11.3	9.2	23.5	39.5	56.5	74.5	93	110	130	150
80%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140
85%	12.8	12.8	7.7	20	33.5	48.5	63.5	79.5	96	110	130
90%	13.5	13.5	7	18.5	31.5	45	59.5	74.5	89.5	105	120
95%	14.3	14.3	6.4	17	29	42	55.5	69.5	84	98.5	110
100%	15	15	5.9	16	27.5	39.5	52	65	79	92.5	105

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS15KHB/ E3SUPS15K3IB + 2 of E3SXR6					
			10 of E3SBTH4	11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4
5%	0.75	0.75	4300	4800	5300	5900	6400	7000
10%	1.5	1.5	1800	2100	2300	2500	2800	3000
15%	2.25	2.25	1100	1300	1400	1600	1700	1900
20%	3	3	800	900	1000	1100	1200	1300
25%	3.75	3.75	600	700	700	800	900	1000
30%	4.5	4.5	500	500	600	700	700	800
35%	5.25	5.25	400	400	500	500	600	600
40%	6	6	300	400	400	400	500	500
45%	6.75	6.75	300	300	300	400	400	500
50%	7.5	7.5	280	300	300	300	400	400
55%	8.25	8.25	250	280	300	300	300	400
60%	9	9	225	250	280	300	300	300
65%	9.75	9.75	205	225	255	280	300	300
70%	10.5	10.5	185	210	230	255	280	300
75%	11.3	11.3	170	190	210	235	255	280
80%	12	12	155	175	195	215	235	255
85%	12.8	12.8	145	165	180	200	220	240
90%	13.5	13.5	135	155	170	185	205	225
95%	14.3	14.3	125	145	160	175	190	210
100%	15	15	120	135	150	165	180	195

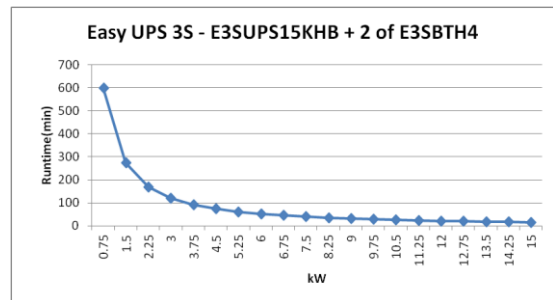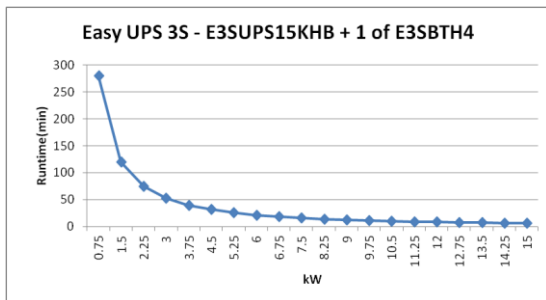

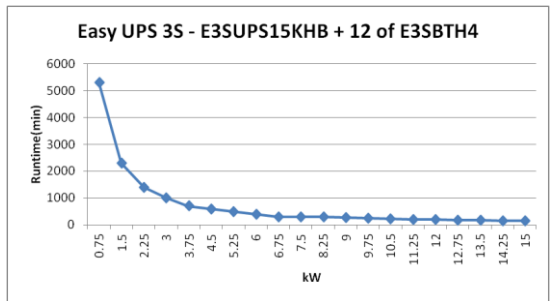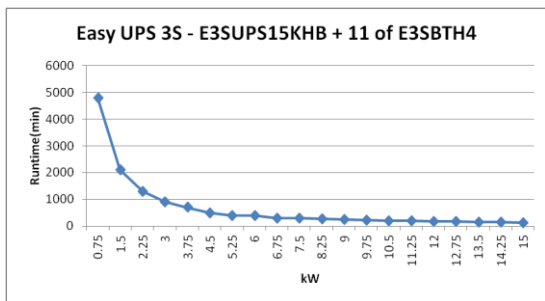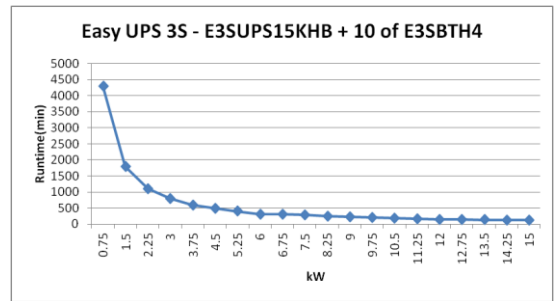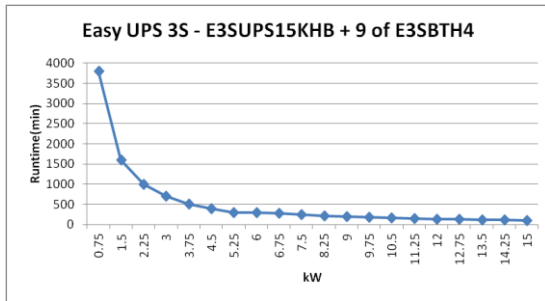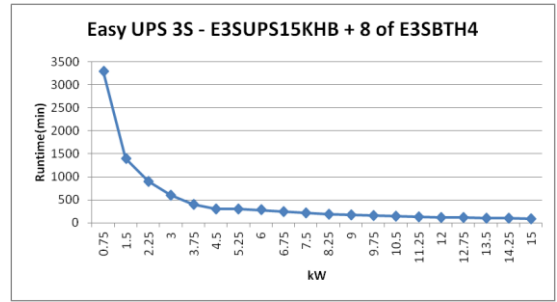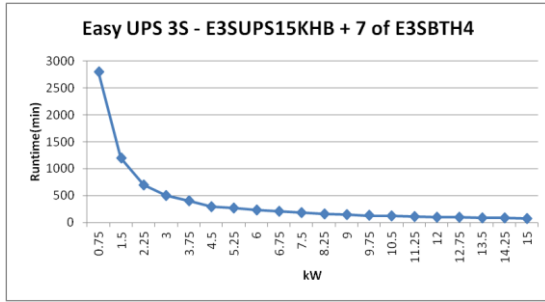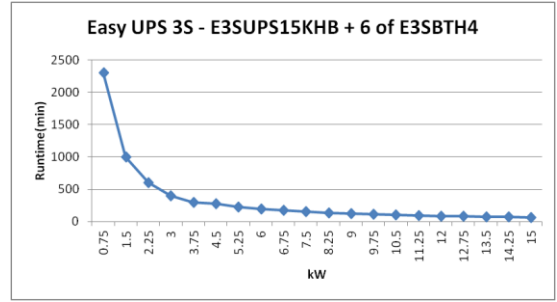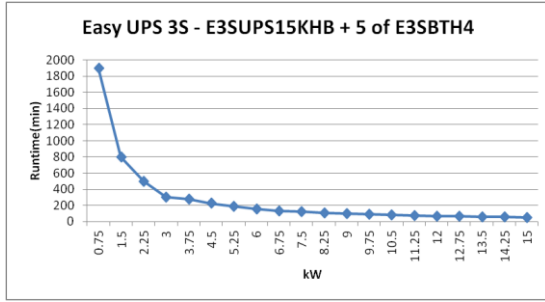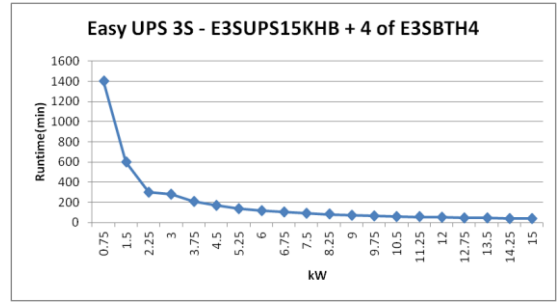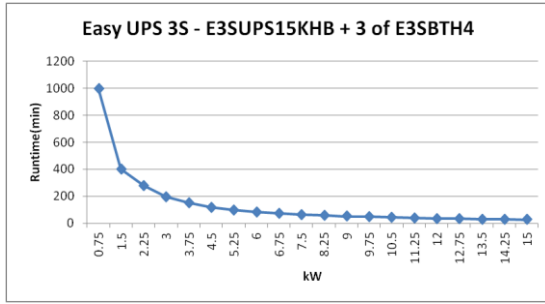

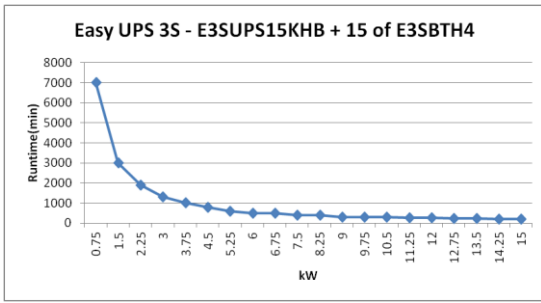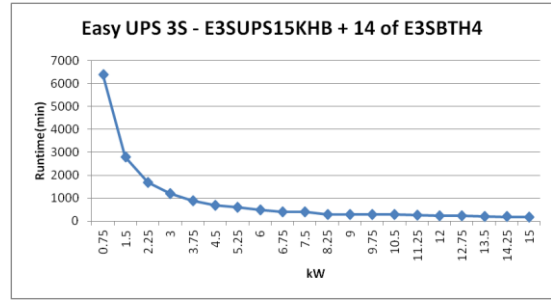
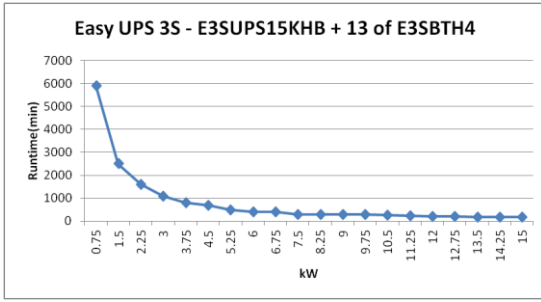












# Easy UPS 3S - 15kVA – Runtime Table




## UPS with battery of E3SBT4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS15KHB1/ E3SUPS15K3IB1 or E3SUPS15KHB/ E3SUPS15K3IB +1 of E3SBT4	E3SUPS15KHB2/ E3SUPS15K3IB2 or E3SUPS15KHB/ E3SUPS15K3IB +2 of E3SBT4	E3SUPS15KHB2/ E3SUPS15K3IB2 +1 of E3SBT4 or E3SUPS15KHB/ E3SUPS15K3IB +3 of E3SBT4	E3SUPS15KHB/ E3SUPS15K3IB + 1 of E3SR6					
						4 of E3SBT4	5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4
5%	0.75	0.75	240	500	900	1200	1600	2000	2500	2900	3400
10%	1.5	1.5	100	240	300	500	700	900	1000	1200	1400
15%	2.25	2.25	63	145	240	300	400	500	600	700	900
20%	3	3	44	100	170	240	300	300	400	500	600
25%	3.75	3.75	33	79	130	185	240	300	300	400	400
30%	4.5	4.5	26	63	100	145	190	240	290	300	300
35%	5.25	5.25	21	52	86	120	160	200	240	285	300
40%	6	6	17.5	44	73	100	135	170	205	240	280
45%	6.75	6.75	15	38	63	90	115	145	175	210	240
50%	7.5	7.5	13	33	55	79	100	130	155	185	210
55%	8.25	8.25	11	29	49	70.5	92.5	115	140	165	190
60%	9	9	9.9	26	44	63	83.5	100	125	145	170
65%	9.75	9.75	8.8	23.5	39.5	57	75.5	94.5	110	135	155
70%	10.5	10.5	7.8	21	36	52	69	86.5	100	120	140
75%	11.3	11.3	7	19	33	47.5	63	79	96	110	130
80%	12	12	6.3	17.5	30.5	44	58	73	88.5	100	120
85%	12.8	12.8	5.6	16	28	40.5	54	67.5	82	96.5	110
90%	13.5	13.5	5.1	15	26	37.5	50	63	76.5	90	100
95%	14.3	14.3		13.5	24	35	47	59	71.5	84	97.5
100%	15	15		12.5	22.5	33	44	55	67	79	91.5

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS15KHB/ E3SUPS15K3IB + 2 of E3SR6					
			10 of E3SBT4	11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4
5%	0.75	0.75	3800	4300	4800	5200	5700	6200
10%	1.5	1.5	1600	1800	2000	2300	2500	2700
15%	2.25	2.25	1000	1100	1200	1400	1500	1600
20%	3	3	700	800	900	1000	1000	1100
25%	3.75	3.75	500	600	600	700	800	900
30%	4.5	4.5	400	500	500	600	600	700
35%	5.25	5.25	300	400	400	500	500	600
40%	6	6	300	300	300	400	400	500
45%	6.75	6.75	275	300	300	300	400	400
50%	7.5	7.5	240	270	300	300	300	300
55%	8.25	8.25	215	240	265	295	300	300
60%	9	9	190	215	240	265	290	300
65%	9.75	9.75	175	195	220	240	265	285
70%	10.5	10.5	160	180	200	220	240	260
75%	11.3	11.3	145	165	185	200	220	240
80%	12	12	135	150	170	185	205	220
85%	12.8	12.8	125	140	155	175	190	205
90%	13.5	13.5	115	130	145	160	175	190
95%	14.3	14.3	110	120	135	150	165	180
100%	15	15	100	115	130	140	155	170

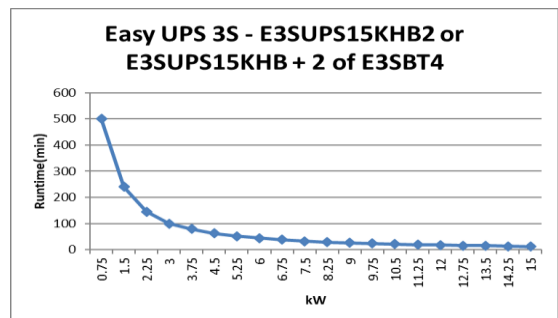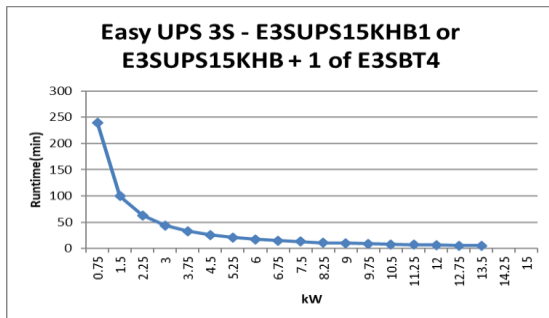

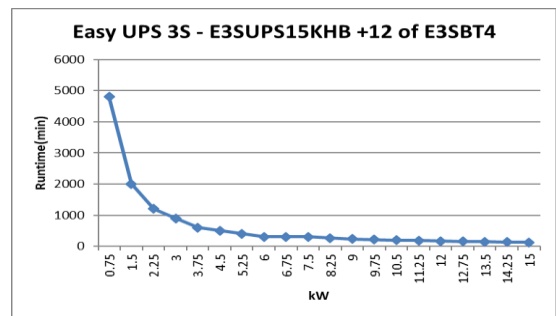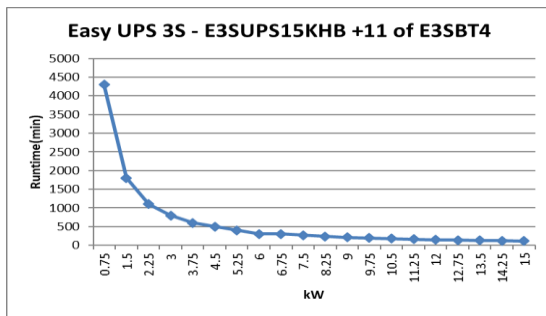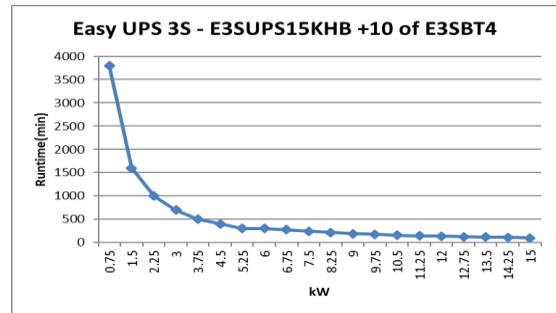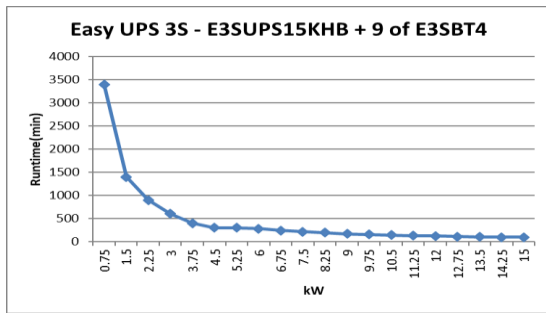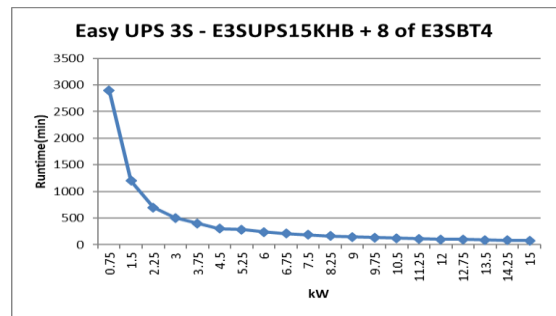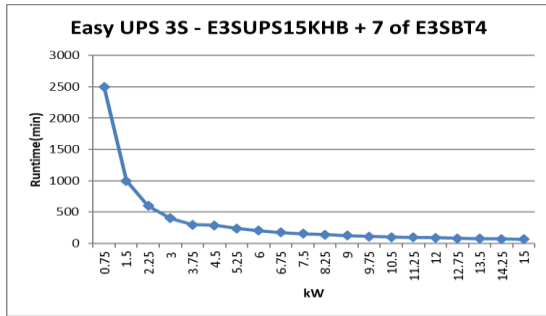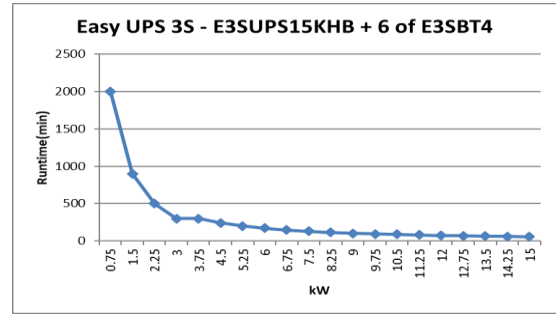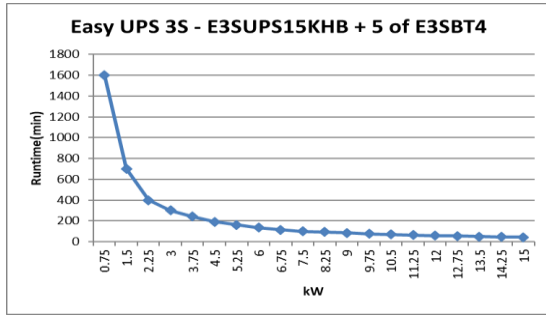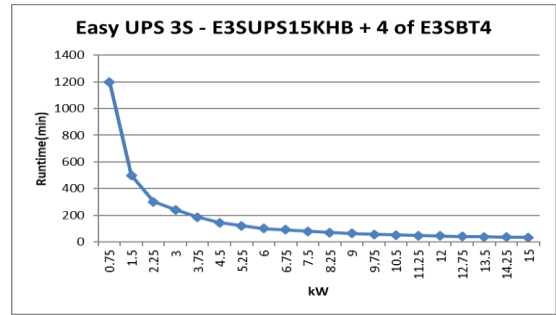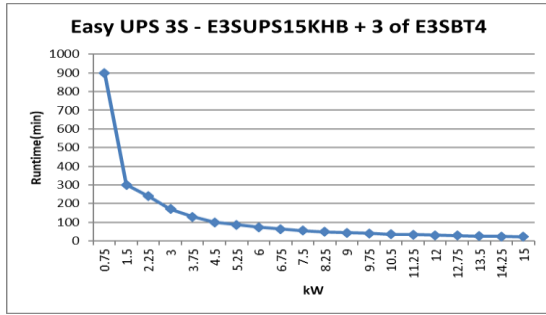

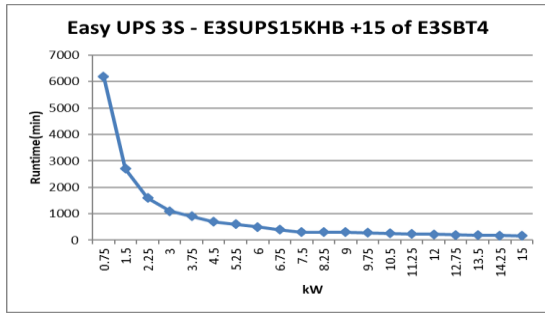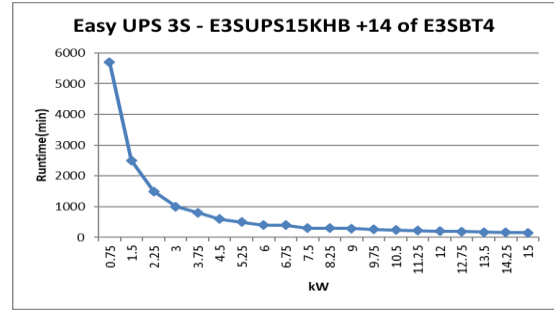
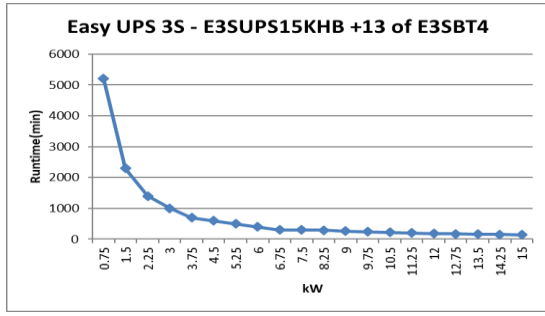












# Easy UPS 3S - 20kVA – Runtime Table




## UPS with battery of E3SBTH4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS20KHB/ E3SUPS20K3IB +			E3SUPS20KHB/ E3SUPS20K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4
5%	1	1	195	400	700	1000	1300	1600	2000	2300	2700
10%	2	2	85.5	195	300	400	500	700	800	1000	1100
15%	3	3	52.5	120	195	280	300	400	500	600	700
20%	4	4	36.5	86	140	195	255	300	300	400	500
25%	5	5	27.5	65.5	105	150	195	245	295	300	400
30%	6	6	21.5	52	86	120	155	195	235	280	300
35%	7	7	17.5	43	71	100	130	160	195	230	265
40%	8	8	14.5	36.5	60.5	86	110	140	165	195	225
45%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195
50%	10	10	10.5	27.5	45.5	65	85.5	105	125	150	170
55%	11	11	9.6	24.5	41	58.5	77	96	115	135	155
60%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140
65%	13	13	7.4	19.5	33	47	62	77.5	93.5	110	125
70%	14	14	6.7	17.5	30	43	57	71	86	100	115
75%	15	15	5.9	16	27.5	39.5	52	65	79	92.5	105
80%	16	16	5.4	14.5	25.5	36.5	48.5	60.5	73	86	99.5
85%	17	17		13.5	23.5	33.5	44.5	56	67.5	79.5	92
90%	18	18		12.5	21.5	31.5	41.5	52.5	63.5	74.5	86
95%	19	19		11.5	20	29.5	39	49	59	69.5	80.5
100%	20	20		10.5	19	27.5	36.5	45.5	55.5	65	75.5

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS20KHB/ E3SUPS20K3IB + 2 of E3SXR6					
			10 of E3SBTH4	11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4
5%	1	1	3000	3400	3800	4100	4500	4900
10%	2	2	1300	1500	1600	1800	2000	2100
15%	3	3	800	900	1000	1100	1200	1300
20%	4	4	500	600	700	800	800	900
25%	5	5	400	500	500	600	600	700
30%	6	6	300	400	400	400	500	500
35%	7	7	300	300	300	400	400	400
40%	8	8	255	290	300	300	300	400
45%	9	9	225	250	280	300	300	300
50%	10	10	195	220	245	270	295	300
55%	11	11	175	195	220	240	265	285
60%	12	12	155	175	195	215	235	255
65%	13	13	140	160	175	195	215	230
70%	14	14	130	145	165	180	195	215
75%	15	15	120	135	150	165	180	195
80%	16	16	110	125	140	155	165	180
85%	17	17	100	115	130	140	155	170
90%	18	18	98	110	120	130	145	160
95%	19	19	91.5	100	110	125	135	145
100%	20	20	85.5	96	105	115	125	140

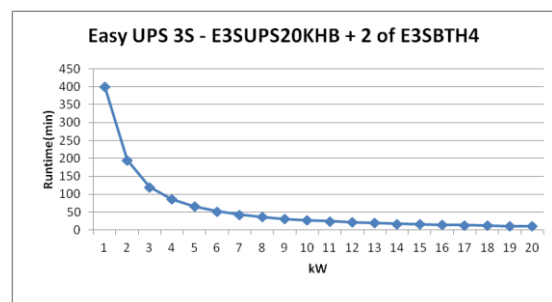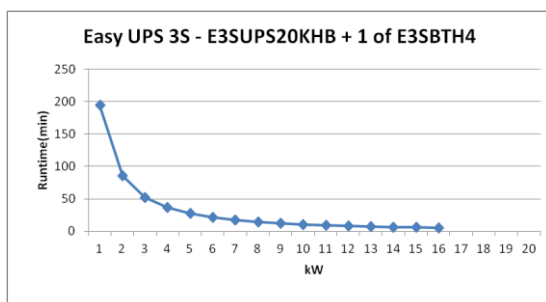

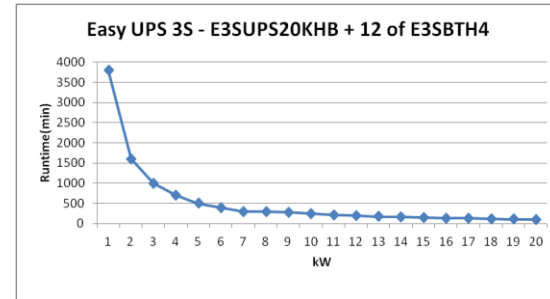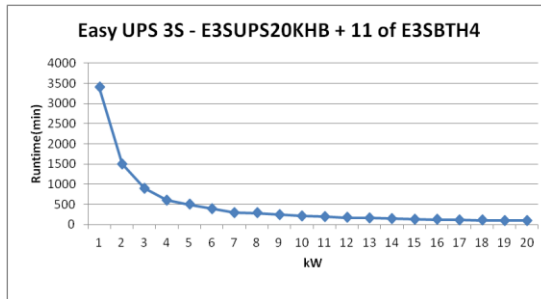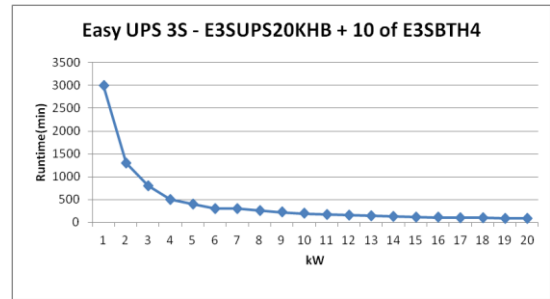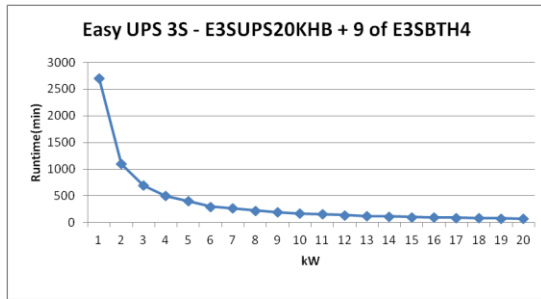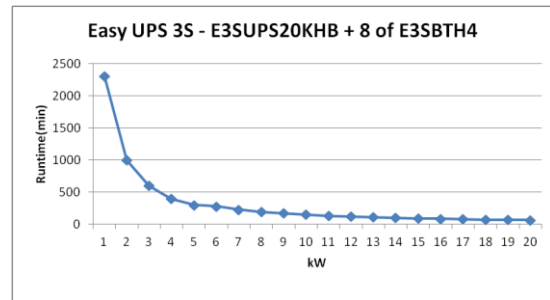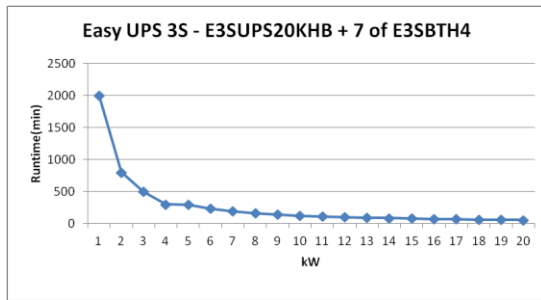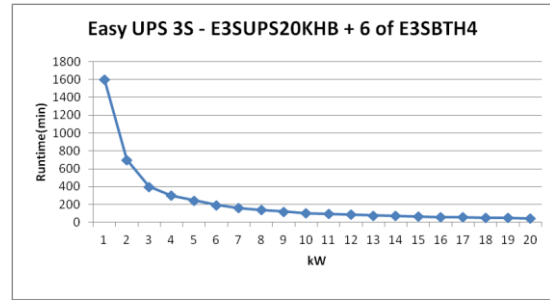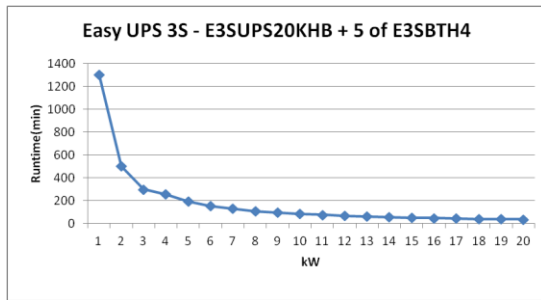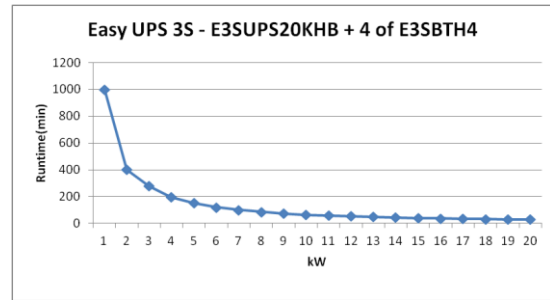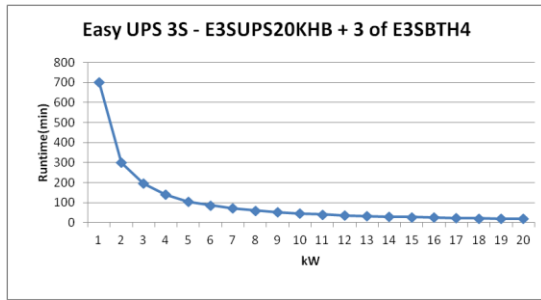

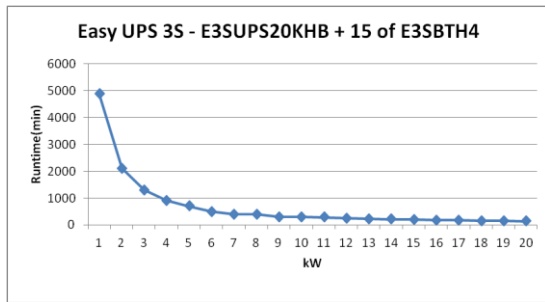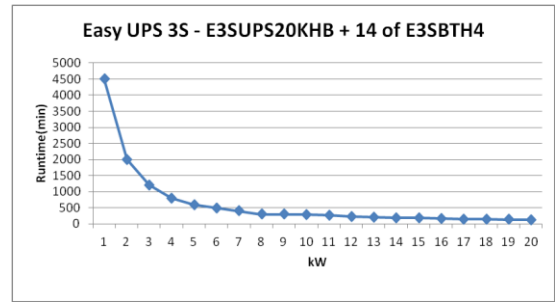
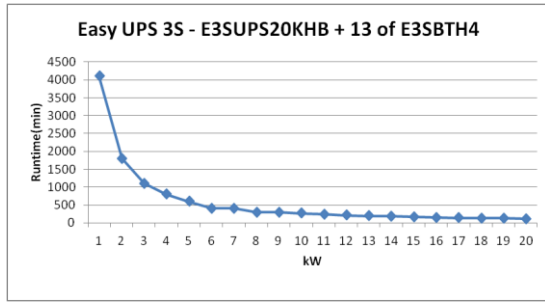












# Easy UPS 3S - 20kVA – Runtime Table



## UPS with battery of E3SBT4

Runtime estimation in minutes										
% of load	kVA	kW	E3SUPS20KHB1/ E3SUPS20K3IB1 or E3SUPS20KHB/ E3SUPS20K3IB + 2 of E3SBT4	E3SUPS20KHB2/ E3SUPS20K3IB2 or E3SUPS20KHB/ E3SUPS20K3IB + 3 of E3SBT4	E3SUPS20KHB/ E3SUPS20K3IB + 1 of E3SXR6					
					4 of E3SBT4	5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4
5%	1	1	300	600	900	1100	1400	1700	2000	2400
10%	2	2	170	275	300	500	600	700	900	1000
15%	3	3	100	170	240	300	300	400	500	600
20%	4	4	73	120	170	220	280	300	300	400
25%	5	5	55.5	91.5	130	170	210	255	300	300
30%	6	6	44	73	100	135	170	205	240	280
35%	7	7	36	60	86	110	140	170	200	230
40%	8	8	30	51	73	96	120	145	170	195
45%	9	9	26	44	63	83.5	120	125	145	170
50%	10	10	22.5	38.5	55	73	120	110	130	150
55%	11	11	20	34	49	65	120	99	115	130
60%	12	12	17.5	30.5	44	58	120	88.5	100	120
65%	13	13	15.5	27	39.5	52.5	120	80	94	105
70%	14	14	14	24.5	36	48	120	73	86.5	100
75%	15	15	12.5	22.5	33	44	120	67	79	91.5
80%	16	16	11.5	20.5	30.5	40.5	120	62	73	84.5
85%	17	17	10.5	19	28	37.5	120	57.5	67.5	78.5
90%	18	18	9.9	17.5	26	35	120	53.5	63.5	73.5
95%	19	19	9.1	16.5	24	32.5	120	50	59	68.5
100%	20	20	8.4	15	22.5	30	120	46.5	55	64

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS20KHB/ E3SUPS20K3IB + 2 of E3SXR6					
			10 of E3SBT4	11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4
5%	1	1	2700	3000	3300	3700	4000	4400
10%	2	2	1100	1300	1400	1600	1700	1900
15%	3	3	700	800	900	1000	1000	1100
20%	4	4	500	500	600	700	700	800
25%	5	5	300	400	400	500	500	600
30%	6	6	300	300	300	400	400	500
35%	7	7	260	295	300	300	300	400
40%	8	8	220	250	275	300	300	300
45%	9	9	190	215	240	265	290	300
50%	10	10	170	190	210	235	255	275
55%	11	11	150	170	190	210	230	250
60%	12	12	135	150	170	185	205	220
65%	13	13	120	135	150	170	185	200
70%	14	14	110	125	140	155	170	185
75%	15	15	100	115	130	140	155	170
80%	16	16	96.5	105	120	130	145	155
85%	17	17	89.5	100	110	120	135	145
90%	18	18	83.5	94	100	115	125	135
95%	19	19	78	87.5	97.5	105	115	125
100%	20	20	73	82	91.5	100	110	120

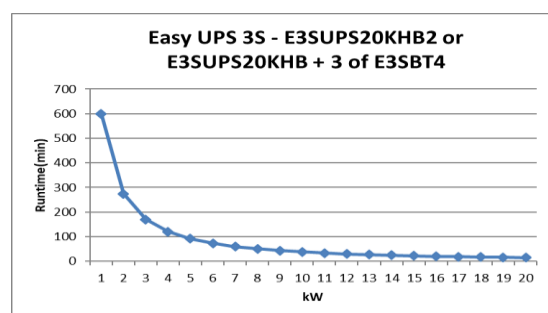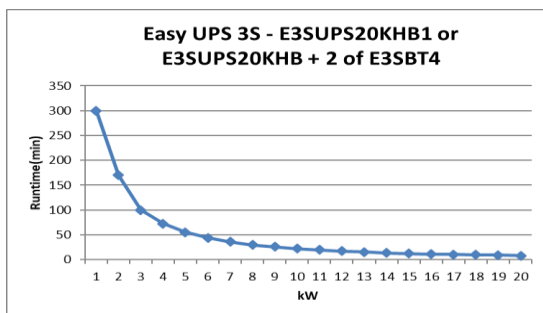

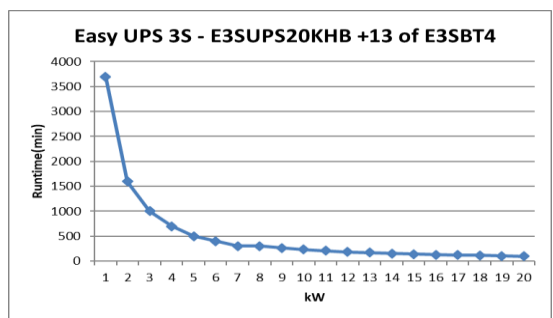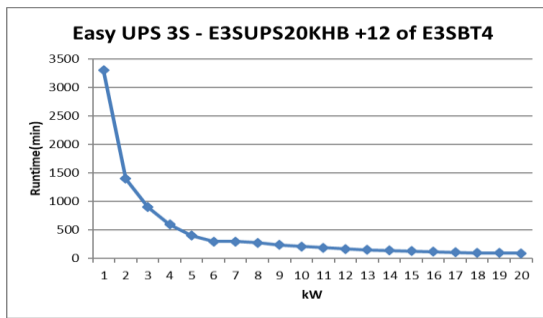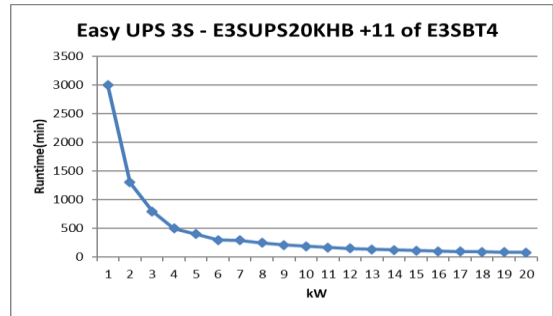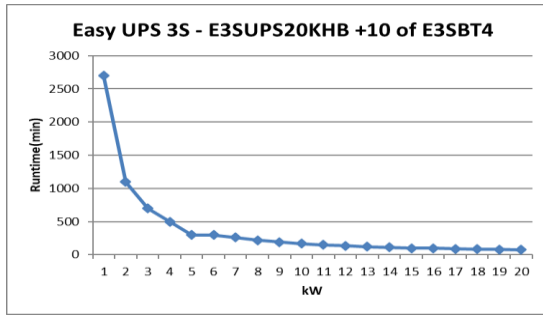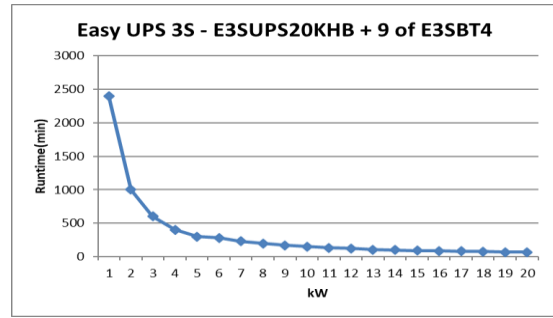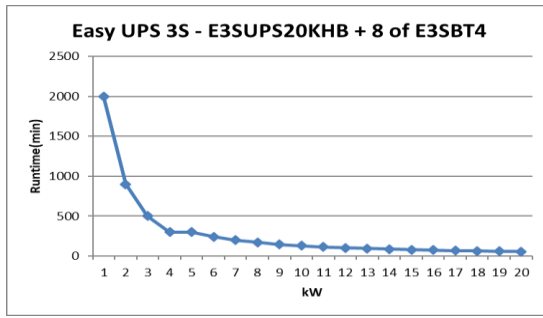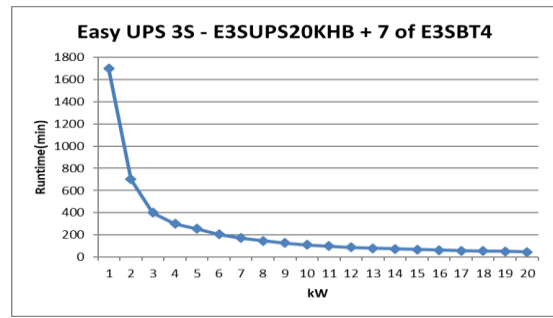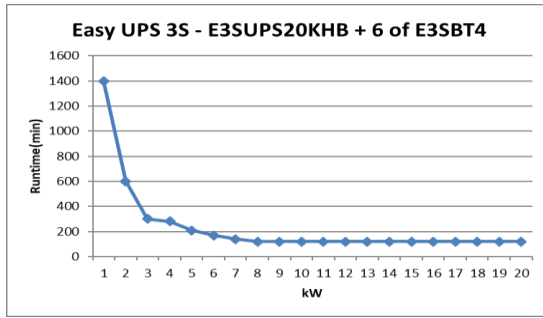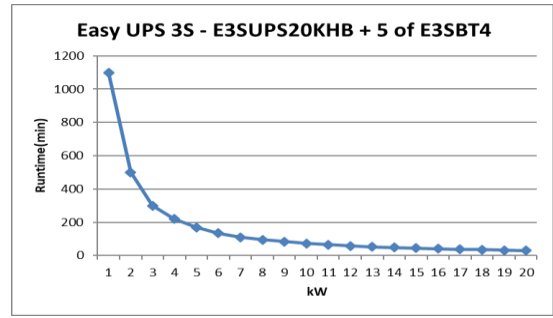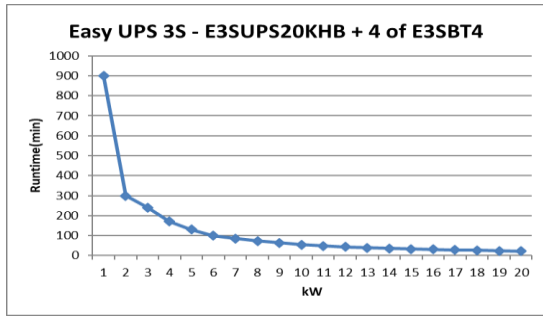

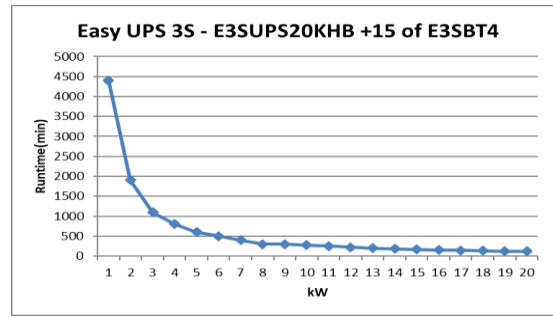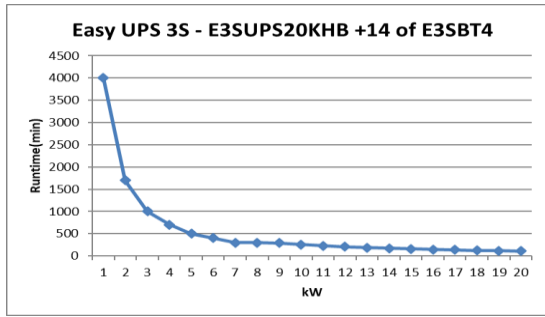











# Easy UPS 3S - 30kVA – Runtime Table











## UPS with battery of E3SBTH4









Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB +				E3SUPS30KHB/ E3SUPS30K3IB + 1 of E3SR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4	10 of E3SBTH4
5%	1.5	1.5	120	275	400	600	800	1000	1200	1400	1600	1800
10%	3	3	52.5	120	195	280	300	400	500	600	700	800
15%	4.5	4.5	31.5	74.5	120	170	225	280	300	300	400	500
20%	6	6	21.5	52	86	120	155	195	235	280	300	300
25%	7.5	7.5	16	39.5	65.5	93	120	150	180	210	245	280
30%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195	225
35%	10.5	10.5	10	26	43	61.5	81	100	120	140	165	185
40%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140	155
45%	13.5	13.5	7	18.5	31.5	45	59.5	74.5	89.5	105	120	135
50%	15	15	5.9	16	27.5	39.5	52	65	79	92.5	105	120
55%	16.5	16.5	5.1	14	24	35	46	58	70	82.5	95	105
60%	18	18		12.5	21.5	31.5	41.5	52.5	63.5	74.5	86	98
65%	19.5	19.5		11	19.5	28.5	37.5	47.5	57.5	67.5	78	88.5
70%	21	21		10	17.5	26	34.5	43	52.5	61.5	71	81
75%	22.5	22.5		9.2	16	23.5	31.5	39.5	48	56.5	65.5	74.5
80%	24	24		8.4	14.5	21.5	29	36.5	44	52	60.5	68.5
85%	25.5	25.5		7.7	13.5	20	26.5	33.5	41	48.5	56	63.5
90%	27	27		7	12.5	18.5	25	31.5	38	45	52	59.5
95%	28.5	28.5		6.4	11.5	17	23	29	35.5	42	48.5	55.5
100%	30	30		6	11	16	21.5	27.5	33.5	39.5	46	52.5

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 2 of E3SR6						E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SR6		
			11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4	16 of E3SBTH4	17 of E3SBTH4	18 of E3SBTH4	19 of E3SBTH4
5%	1.5	1.5	2100	2300	2500	2800	3000	3300	3500	3800	4000
10%	3	3	900	1000	1100	1200	1300	1400	1500	1600	1700
15%	4.5	4.5	500	600	700	700	800	900	900	1000	1100
20%	6	6	400	400	400	500	500	600	600	700	700
25%	7.5	7.5	300	300	300	400	400	400	500	500	600
30%	9	9	250	280	300	300	300	300	400	400	400
35%	10.5	10.5	210	230	255	280	300	300	300	300	400
40%	12	12	175	195	215	235	255	280	300	300	300
45%	13.5	13.5	155	170	185	205	225	240	260	275	295
50%	15	15	135	150	165	180	195	210	230	245	260
55%	16.5	16.5	120	135	145	160	175	190	205	215	230
60%	18	18	110	120	130	145	160	170	185	195	210
65%	19.5	19.5	99.5	110	120	130	145	155	165	180	190
70%	21	21	91	100	110	120	130	140	150	165	175
75%	22.5	22.5	83.5	93	100	110	120	130	140	150	160
80%	24	24	77	86	94.5	100	110	120	130	140	145
85%	25.5	25.5	71.5	79.5	88	96	100	110	120	130	135
90%	27	27	67	74.5	82	89.5	97.5	105	110	120	130
95%	28.5	28.5	62.5	69.5	76.5	84	91	98.5	105	110	120
100%	30	30	59	65.5	72	79	86	93	100	105	110

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SR6				E3SUPS30KHB/ E3SUPS30K3IB + 4 of E3SR6				
			20 of E3SBTH4	21 of E3SBTH4	22 of E3SBTH4	23 of E3SBTH4	24 of E3SBTH4	25 of E3SBTH4	26 of E3SBTH4	27 of E3SBTH4	28 of E3SBTH4
5%	1.5	1.5	4300	4500	4800	5100	5300	5600	5900	6100	6400
10%	3	3	1900	2000	2100	2200	2300	2400	2600	2700	2800
15%	4.5	4.5	1100	1200	1300	1300	1400	1500	1600	1600	1700
20%	6	6	800	800	900	900	1000	1000	1100	1100	1200
25%	7.5	7.5	600	600	700	700	700	800	800	900	900
30%	9	9	500	500	500	600	600	600	700	700	700
35%	10.5	10.5	400	400	400	500	500	500	500	600	600
40%	12	12	300	300	400	400	400	400	400	500	500
45%	13.5	13.5	300	300	300	300	300	400	400	400	400
50%	15	15	275	295	300	300	300	300	300	400	400
55%	16.5	16.5	245	265	275	290	300	300	300	300	300
60%	18	18	225	235	250	265	280	295	300	300	300
65%	19.5	19.5	205	215	225	240	255	265	280	290	300
70%	21	21	185	195	210	220	230	240	255	265	280
75%	22.5	22.5	170	180	190	200	210	225	235	245	255
80%	24	24	155	165	175	185	195	205	215	225	235
85%	25.5	25.5	145	155	165	175	180	190	200	210	220
90%	27	27	135	145	155	160	170	180	185	195	205
95%	28.5	28.5	125	135	145	150	160	165	175	185	190
100%	30	30	120	125	135	140	150	155	165	175	180

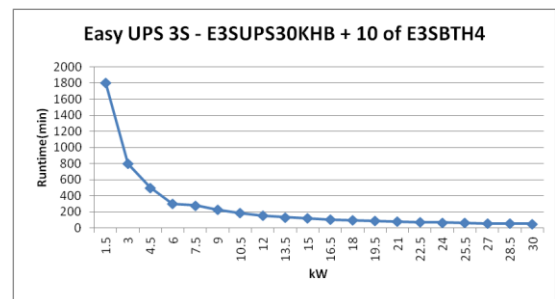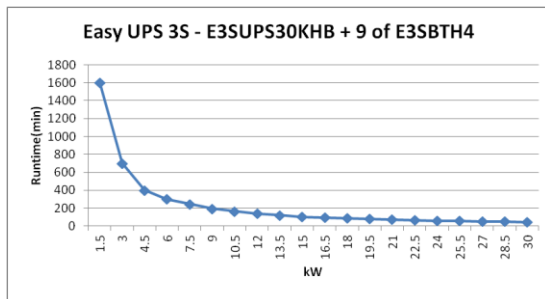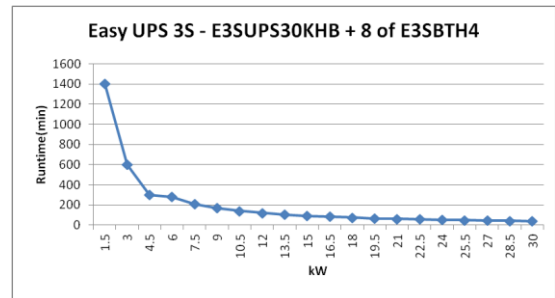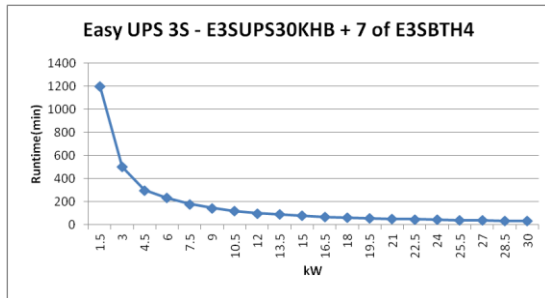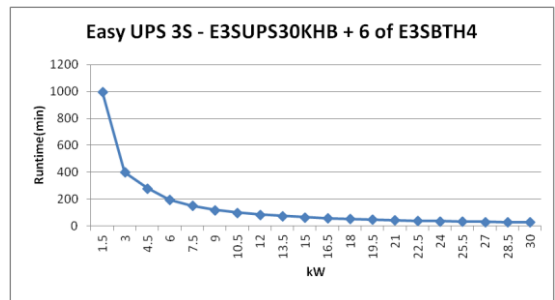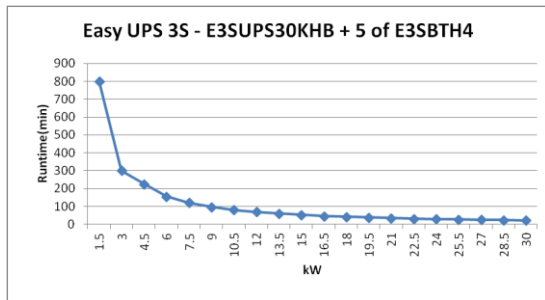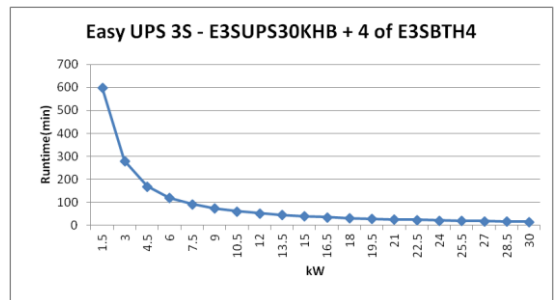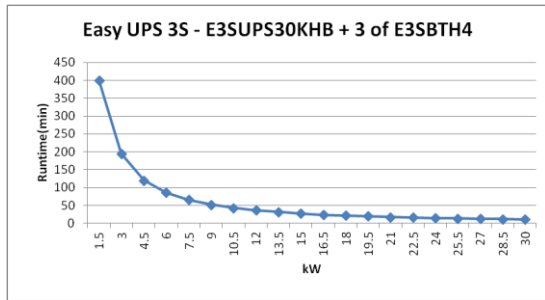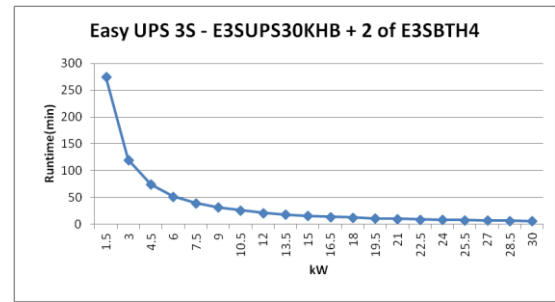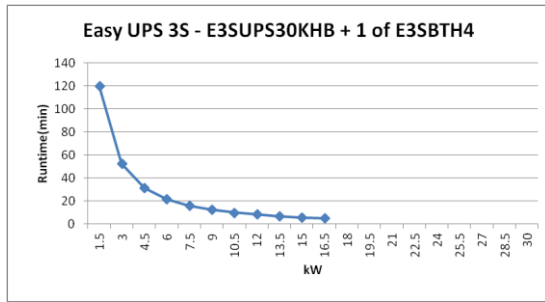

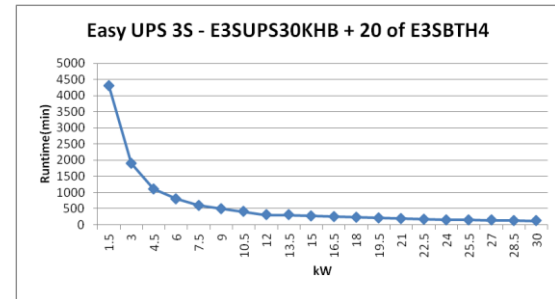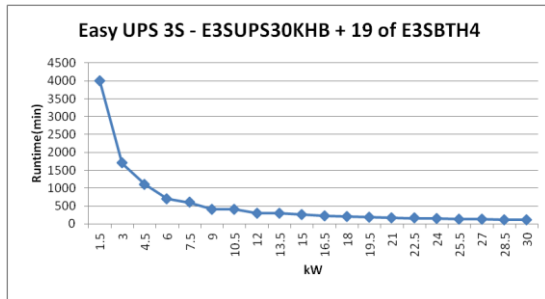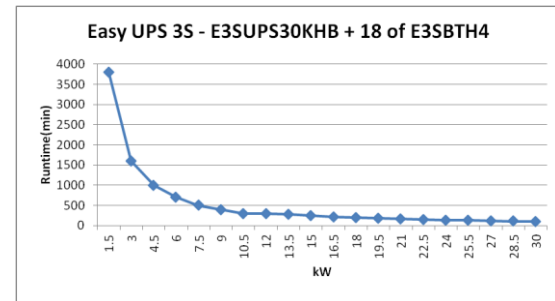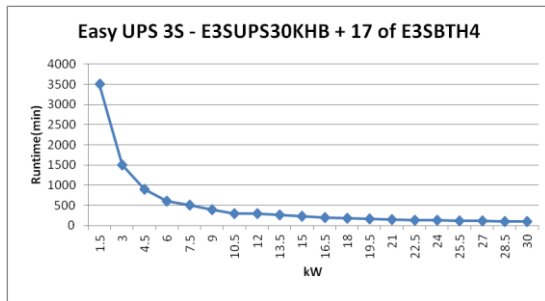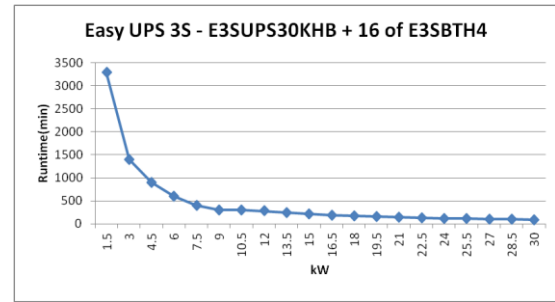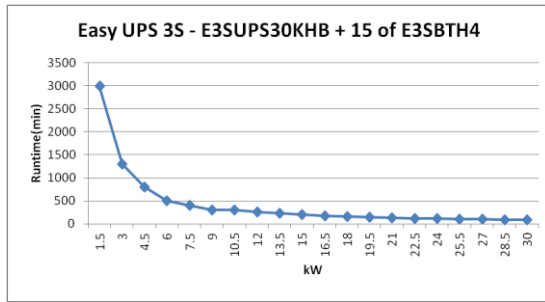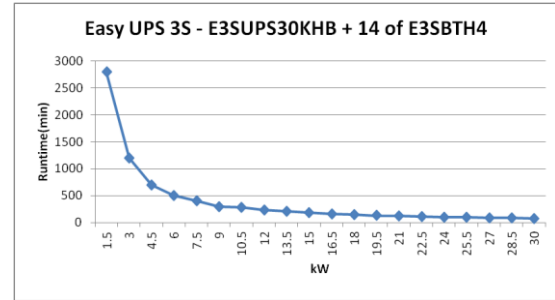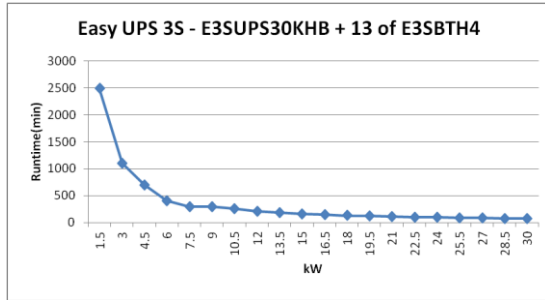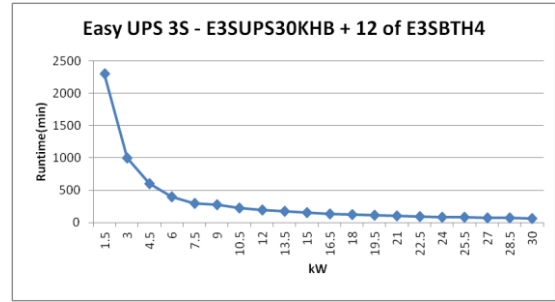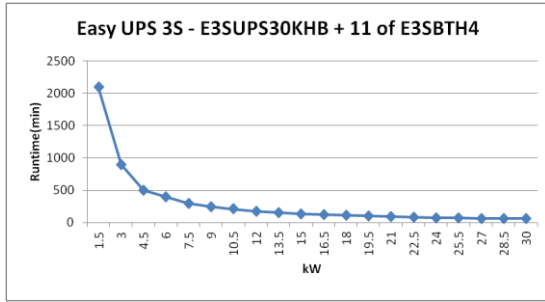

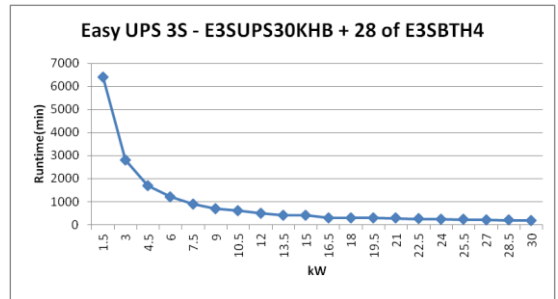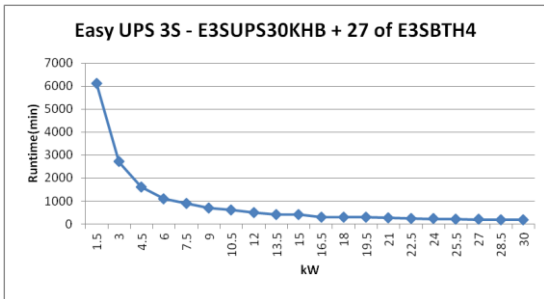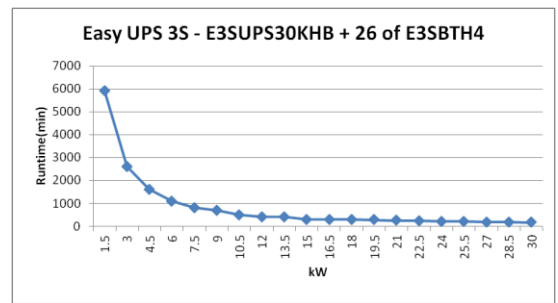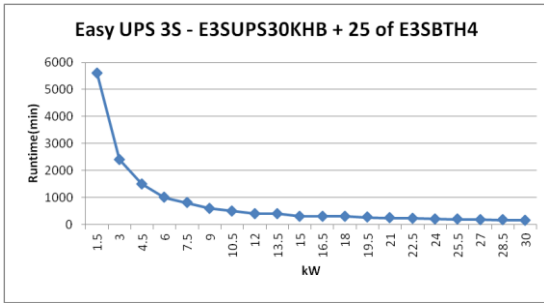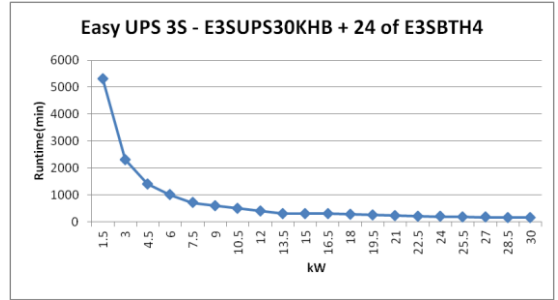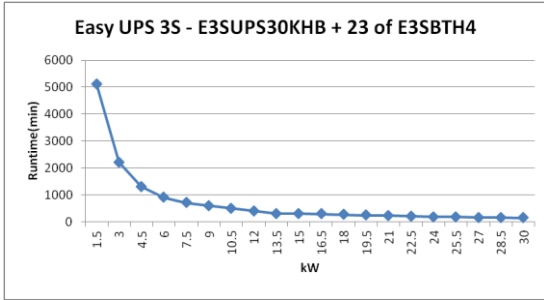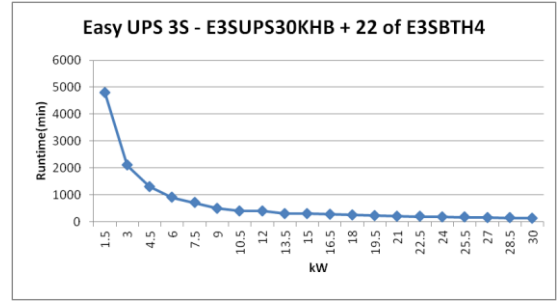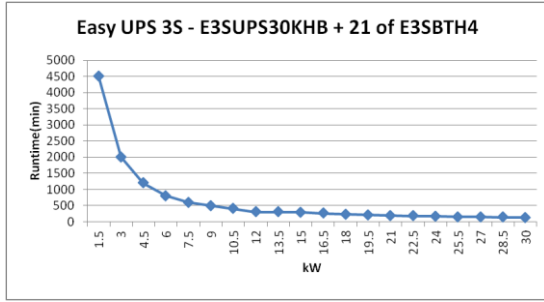











# Easy UPS 3S - 30kVA – Runtime Table











## UPS with battery of E3SBT4








Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB1/ E3SUPS30K3IB1 or E3SUPS30KHB/ E3SUPS30K3IB +2 of E3SBT4	E3SUPS30KHB1/ E3SUPS30K3IB1 +1 of E3SBT4 or E3SUPS30KHB/ E3SUPS30K3IB +3 of E3SBT4	E3SUPS30KHB2/ E3SUPS30K3IB2 or E3SUPS30KHB/ E3SUPS30K3IB +4 of E3SBT4	E3SUPS30KHB/ E3SUPS30K3IB + 1 of E3SXR6					
						5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4	10 of E3SBT4
5%	1.5	1.5	240	300	500	700	900	1000	1200	1400	1600
10%	3	3	100	170	240	300	300	400	500	600	700
15%	4.5	4.5	63	100	145	190	240	290	300	300	400
20%	6	6	44	73	100	135	170	205	240	280	300
25%	7.5	7.5	33	55	79	100	130	155	185	210	240
30%	9	9	26	44	63	83.5	100	125	145	170	190
35%	10.5	10.5	21	36	52	69	86.5	100	120	140	160
40%	12	12	17.5	30.5	44	58	73	88.5	100	120	135
45%	13.5	13.5	15	26	37.5	50	63	76.5	90	100	115
50%	15	15	12.5	22.5	33	44	55	67	79	91.5	100
55%	16.5	16.5	11	19.5	29	38.5	49	59.5	70	81	92.5
60%	18	18	9.9	17.5	26	35	44	53.5	63.5	73.5	83.5
65%	19.5	19.5	8.8	15.5	23.5	31.5	39.5	48.5	57	66.5	75.5
70%	21	21	7.8	14	21	28.5	36	44	52	60.5	69
75%	22.5	22.5	7	13	19	26	33	40	47.5	55.5	63
80%	24	24	6.3	11.5	17.5	24	30.5	37	44	51	58
85%	25.5	25.5	5.6	10.5	16	22	28	34	40.5	47	54
90%	27	27	5.1	9.9	15	20.5	26	31.5	37.5	44	50
95%	28.5	28.5		9.1	13.5	19	24	29.5	35	41	47
100%	30	30		8.4	13	17.5	22.5	27.5	33	38.5	44

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 2 of E3SXR6						E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SXR6		
			11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4	16 of E3SBT4	17 of E3SBT4	18 of E3SBT4	19 of E3SBT4
5%	1.5	1.5	1800	2000	2300	2500	2700	2900	3100	3300	3600
10%	3	3	800	900	1000	1000	1100	1200	1300	1400	1500
15%	4.5	4.5	500	500	600	600	700	700	800	900	900
20%	6	6	300	300	400	400	500	500	600	600	600
25%	7.5	7.5	270	300	300	300	300	400	400	400	500
30%	9	9	215	240	265	290	300	300	300	300	400
35%	10.5	10.5	180	200	220	240	260	285	300	300	300
40%	12	12	150	170	185	205	220	240	260	280	295
45%	13.5	13.5	130	145	160	175	190	210	225	240	255
50%	15	15	115	130	140	155	170	185	195	210	225
55%	16.5	16.5	100	115	125	135	150	160	175	185	200
60%	18	18	94	100	115	125	135	145	160	170	180
65%	19.5	19.5	85	94.5	100	110	120	135	145	155	165
70%	21	21	77.5	86.5	95.5	100	110	120	130	140	150
75%	22.5	22.5	71	79	87.5	96	100	110	120	130	135
80%	24	24	65.5	73	80.5	88.5	96.5	100	110	120	125
85%	25.5	25.5	60.5	67.5	75	82	89.5	96.5	100	110	115
90%	27	27	56.5	63	69.5	76.5	83	90	97	100	110
95%	28.5	28.5	52.5	59	65	71.5	77.5	84	91	97.5	100
100%	30	30	49.5	55.5	61	67	73	79.5	85.5	91.5	98

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SXR6			E3SUPS30KHB/ E3SUPS30K3IB + 4 of E3SXR6					
			20 of E3SBT4	21 of E3SBT4	22 of E3SBT4	23 of E3SBT4	24 of E3SBT4	25 of E3SBT4	26 of E3SBT4	27 of E3SBT4	28 of E3SBT4
5%	1.5	1.5	3800	4000	4300	4500	4700	5000	5200	5500	5700
10%	3	3	1600	1700	1800	1900	2000	2200	2300	2400	2500
15%	4.5	4.5	1000	1000	1100	1200	1200	1300	1400	1400	1500
20%	6	6	700	700	800	800	900	900	1000	1000	1000
25%	7.5	7.5	500	500	600	600	600	700	700	800	800
30%	9	9	400	400	500	500	500	500	600	600	600
35%	10.5	10.5	300	300	400	400	400	400	500	500	500
40%	12	12	300	300	300	300	300	400	400	400	400
45%	13.5	13.5	275	290	300	300	300	300	300	300	400
50%	15	15	240	255	270	285	300	300	300	300	300
55%	16.5	16.5	215	225	240	255	265	280	295	300	300
60%	18	18	195	205	215	230	240	255	265	280	290
65%	19.5	19.5	175	185	195	205	220	230	240	250	265
70%	21	21	160	170	180	190	200	210	220	230	240
75%	22.5	22.5	145	155	165	175	185	190	200	210	220
80%	24	24	135	145	150	160	170	180	185	195	205
85%	25.5	25.5	125	135	140	150	155	165	175	180	190
90%	27	27	115	125	130	140	145	155	160	170	175
95%	28.5	28.5	110	115	120	130	135	145	150	160	165
100%	30	30	100	110	115	120	130	135	140	150	155

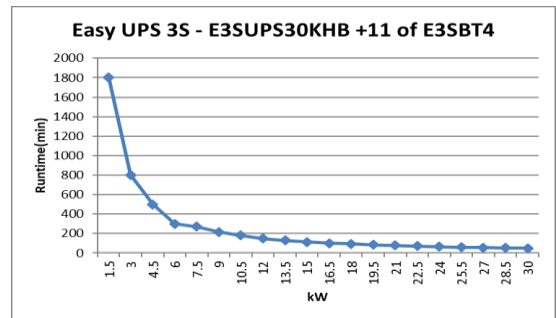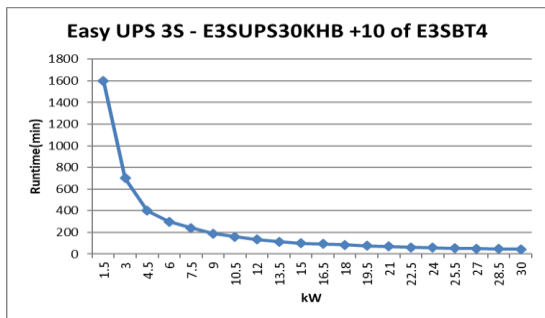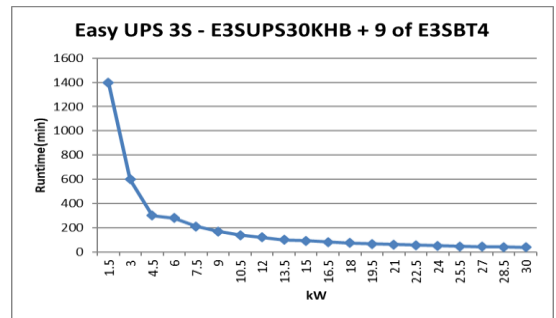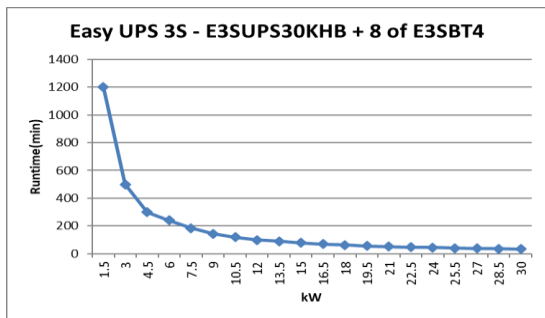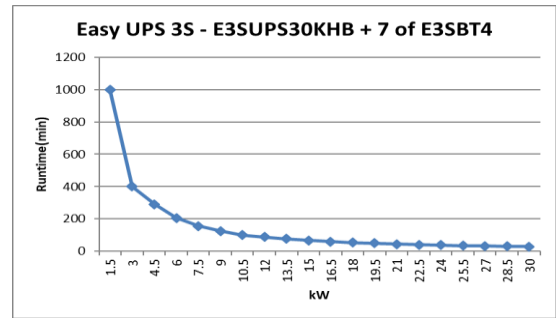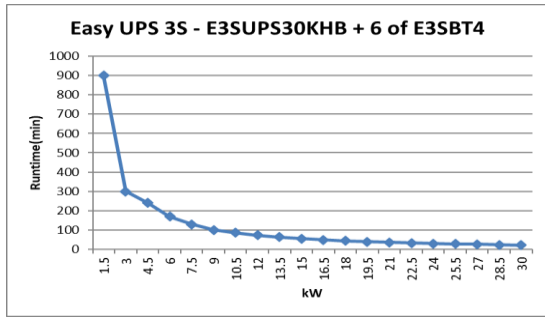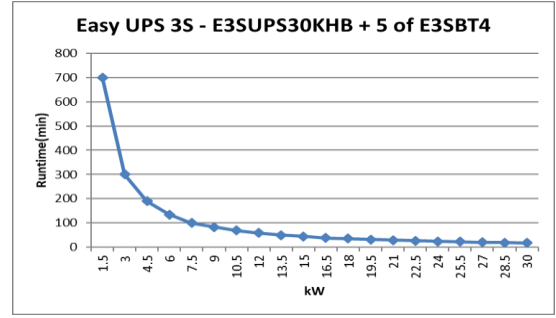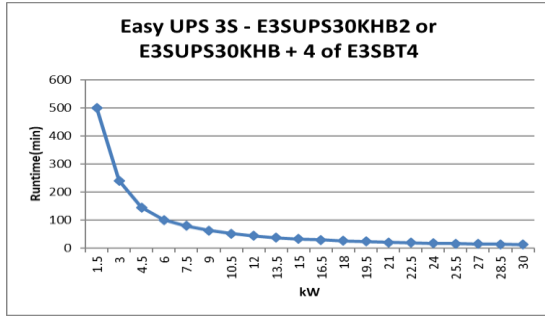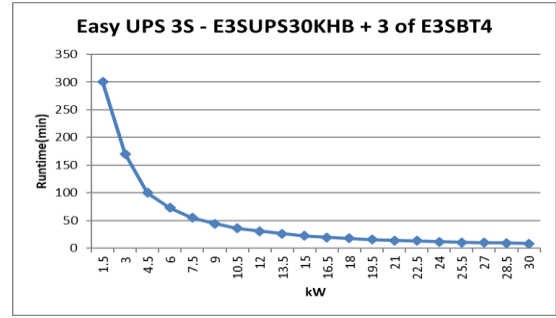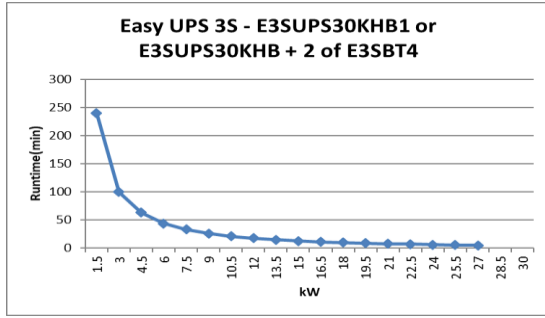

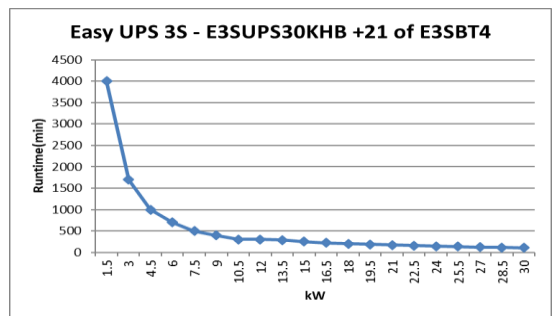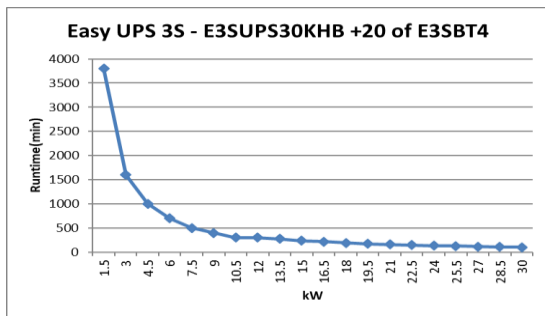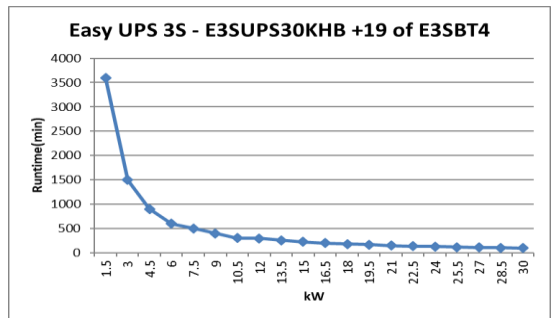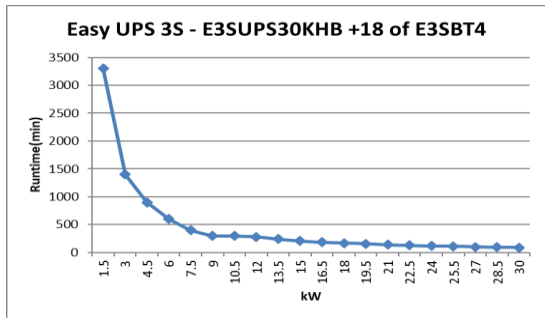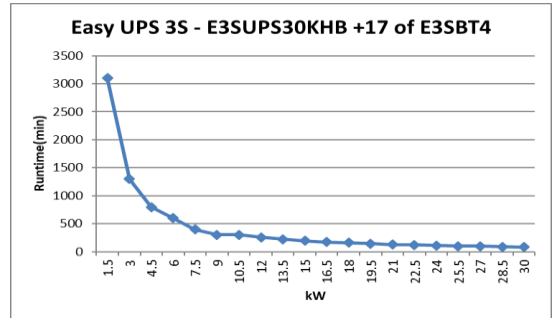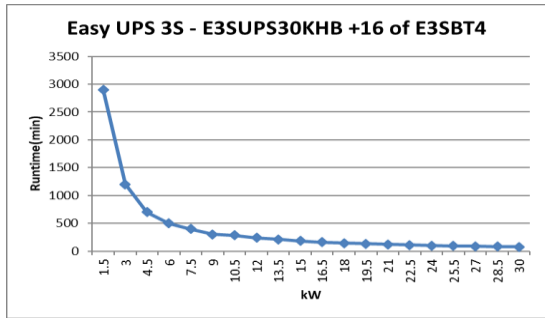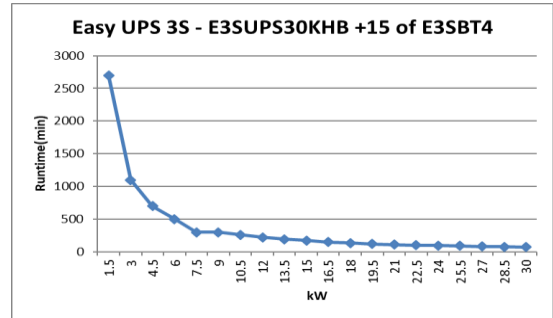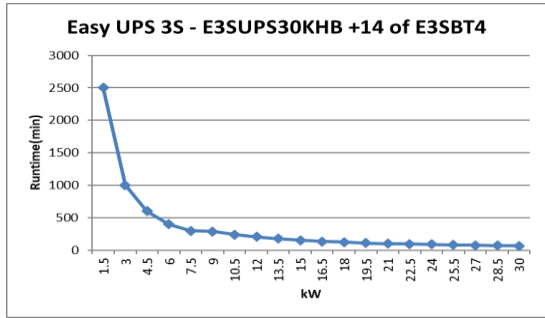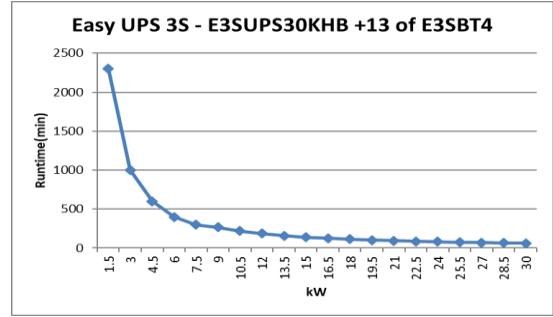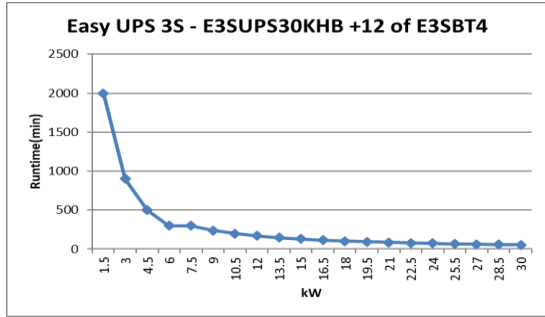

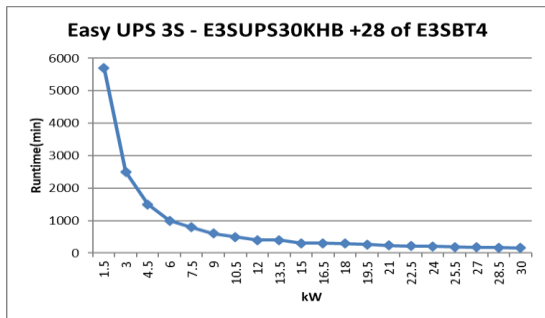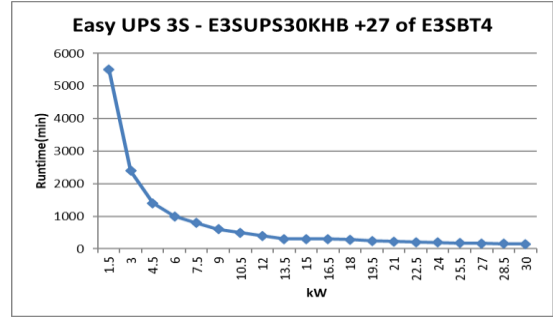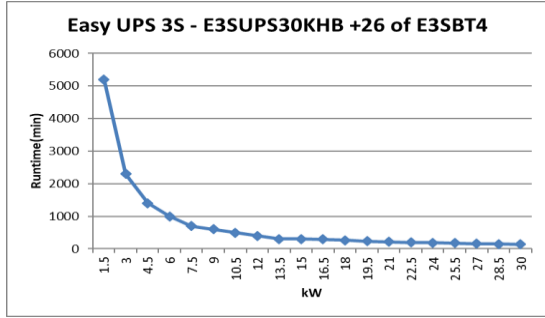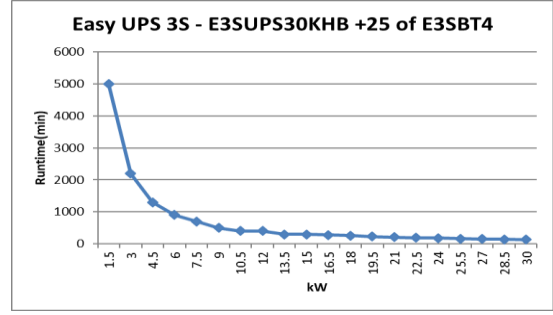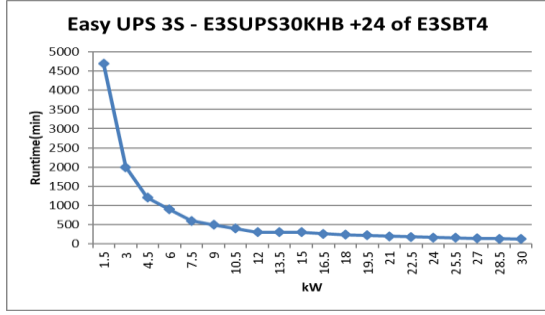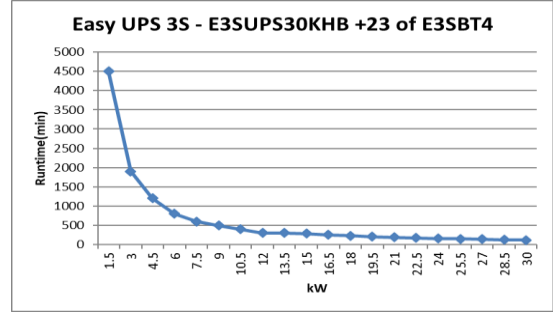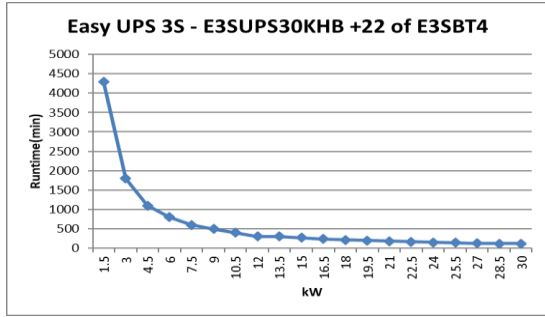











# Easy UPS 3S - 40kVA – Runtime Table











## UPS with battery of E3SBTH4









Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS40KHB +				E3SUPS40KHB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4	10 of E3SBTH4
5%	2	2	85.5	195	300	400	500	700	800	1000	1100	1300
10%	4	4	36.5	86	140	195	255	300	300	400	500	500
15%	6	6	21.5	52	86	120	155	195	235	280	300	300
20%	8	8	14.5	36.5	60.5	86	110	140	165	195	225	255
25%	10	10	10.5	27.5	45.5	65	85.5	105	125	150	170	195
30%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140	155
35%	14	14	6.7	17.5	30	43	57	71	86	100	115	130
40%	16	16	5.4	14.5	25.5	36.5	48.5	60.5	73	86	99.5	110
45%	18	18		12.5	21.5	31.5	41.5	52.5	63.5	74.5	86	98
50%	20	20		10.5	19	27.5	36.5	45.5	55.5	65	75.5	85.5
55%	22	22		9.5	16.5	24	32	40.5	49	58	67	76.5
60%	24	24		8.4	14.5	21.5	29	36.5	44	52	60.5	68.5
65%	26	26		7.5	13	19.5	26	33	40	47.5	54.5	62.5
70%	28	28		6.7	12	17.5	23.5	30	36.5	43	50	57
75%	30	30		6	11	16	21.5	27.5	33.5	39.5	46	52.5
80%	32	32		5.3	10	14.5	20	25	30.5	36.5	42	48
85%	34	34			9.1	13.5	18.5	23.5	28.5	33.5	39	44.5
90%	36	36			8.4	12.5	17	21.5	26.5	31.5	36.5	41.5
95%	38	38			7.8	11.5	16	20	24.5	29.5	34	39
100%	40	40			7.2	11	14.5	19	23	27.5	32	36.5

Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS40KHB + 2 of E3SXR6						E3SUPS40KHB + 3 of E3SXR6			
			11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4	16 of E3SBTH4	17 of E3SBTH4	18 of E3SBTH4	19 of E3SBTH4	20 of E3SBTH4
5%	2	2	1500	1600	1800	2000	2100	2300	2500	2700	2800	
10%	4	4	600	700	800	800	900	1000	1100	1100	1200	
15%	6	6	400	400	400	500	500	600	600	700	700	
20%	8	8	290	300	300	300	400	400	400	500	500	
25%	10	10	220	245	270	295	300	300	300	400	400	
30%	12	12	175	195	215	235	255	280	300	300	300	
35%	14	14	145	165	180	195	215	230	250	265	285	
40%	16	16	125	140	155	165	180	195	210	225	240	
45%	18	18	110	120	130	145	160	170	185	195	210	
50%	20	20	96	105	115	125	140	150	160	170	185	
55%	22	22	86	95.5	105	115	125	135	145	155	165	
60%	24	24	77	86	94.5	100	110	120	130	140	145	
65%	26	26	70	78	86	94	100	110	115	125	135	
70%	28	28	64	71	78.5	86	93.5	100	105	115	120	
75%	30	30	59	65.5	72	79	86	93	100	105	110	
80%	32	32	54	60.5	66.5	73	79	85.5	92.5	99	105	
85%	34	34	50.5	56	62	67.5	73.5	79.5	86	92	98	
90%	36	36	47	52	57.5	63	68.5	74.5	80	86	91.5	
95%	38	38	44	49	54	59	64.5	69.5	75	80.5	86	
100%	40	40	41	46	50.5	55.5	60.5	65.5	70.5	75.5	80.5	

Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS40KHB + 3 of E3SXR6					E3SUPS40KHB + 4 of E3SXR6				
			20 of E3SBTH4	21 of E3SBTH4	22 of E3SBTH4	23 of E3SBTH4	24 of E3SBTH4	25 of E3SBTH4	26 of E3SBTH4	27 of E3SBTH4	28 of E3SBTH4	
5%	2	2	3000	3200	3400	3600	3800	4000	4100	4300	4500	
10%	4	4	1300	1400	1500	1500	1600	1700	1800	1900	2000	
15%	6	6	800	800	900	900	1000	1000	1100	1100	1200	
20%	8	8	500	600	600	600	700	700	800	800	800	
25%	10	10	400	400	500	500	500	500	600	600	600	
30%	12	12	300	300	400	400	400	400	500	500	500	
35%	14	14	300	300	300	300	300	300	400	400	400	
40%	16	16	255	275	290	300	300	300	300	300	300	
45%	18	18	225	235	250	265	280	295	300	300	300	
50%	20	20	195	210	220	230	245	255	270	280	295	
55%	22	22	175	185	195	205	220	230	240	250	260	
60%	24	24	155	165	175	185	195	205	215	225	235	
65%	26	26	140	150	160	170	180	185	195	205	215	
70%	28	28	130	140	145	155	165	170	180	190	195	
75%	30	30	120	125	135	140	150	155	165	175	180	
80%	32	32	110	115	125	130	140	145	150	160	165	
85%	34	34	100	110	115	120	130	135	140	150	155	
90%	36	36	97.5	100	105	115	120	125	130	140	145	
95%	38	38	91.5	97	100	105	110	120	125	130	135	
100%	40	40	86	91	96.5	100	105	110	115	120	125	

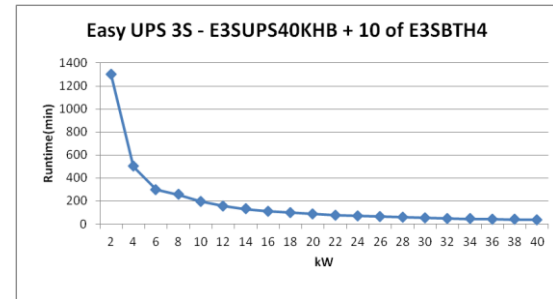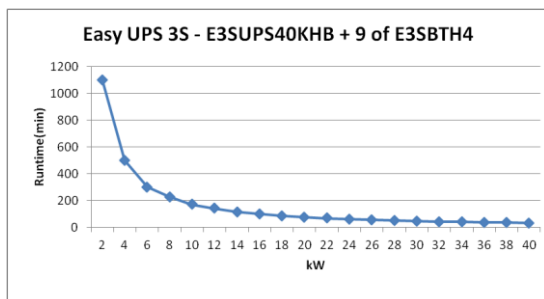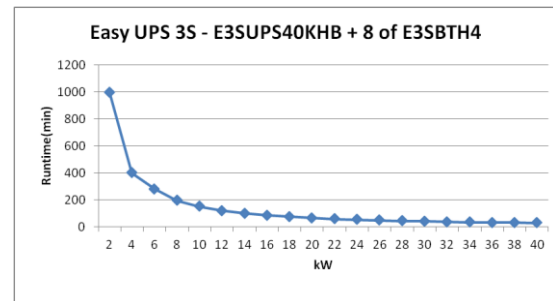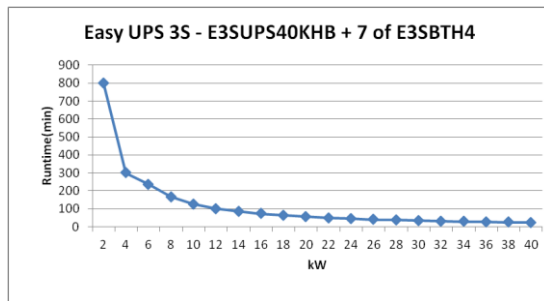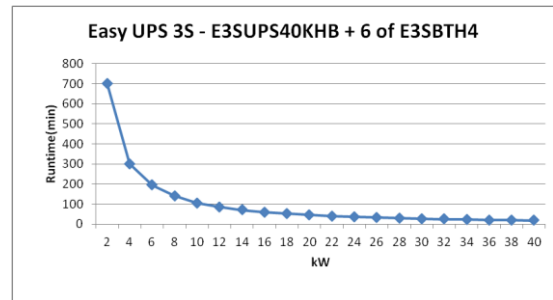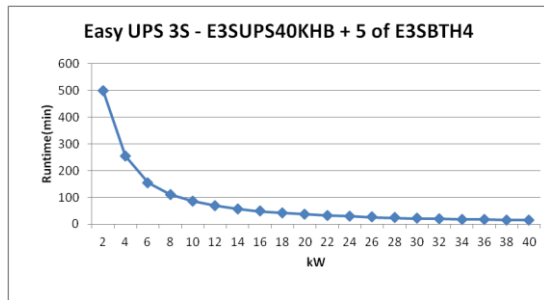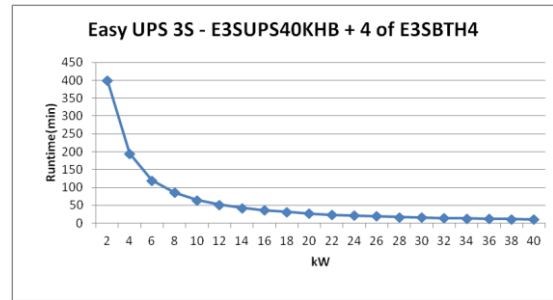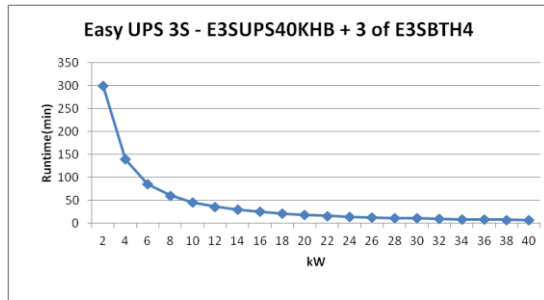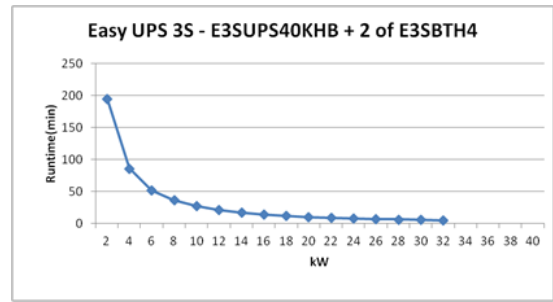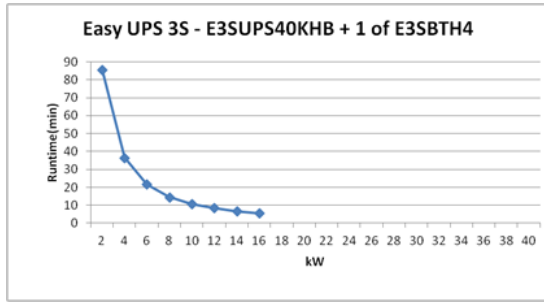

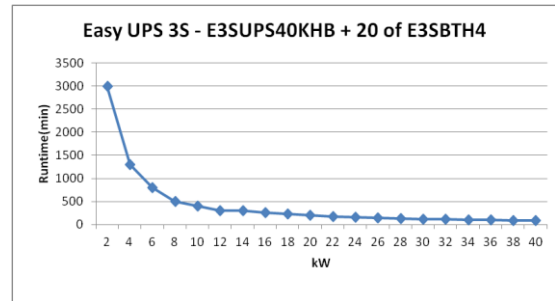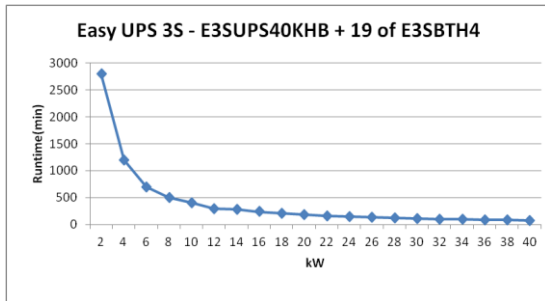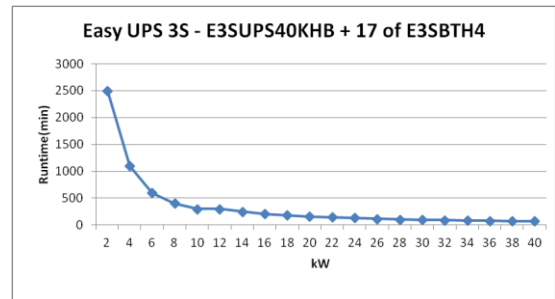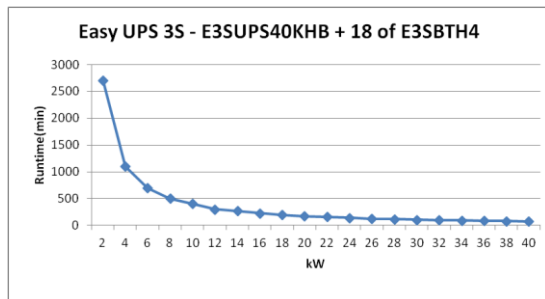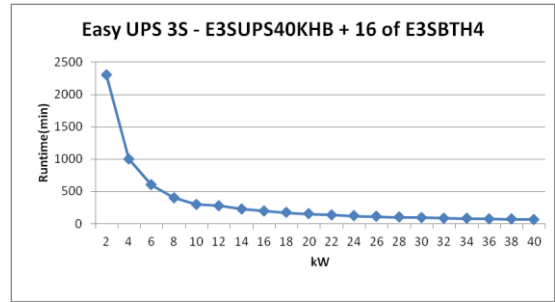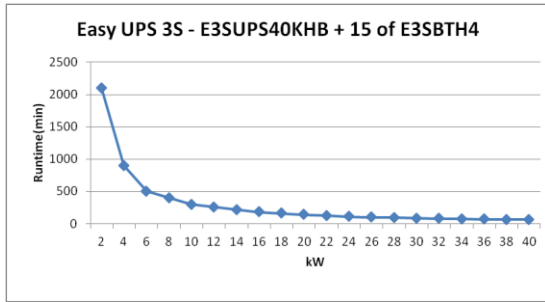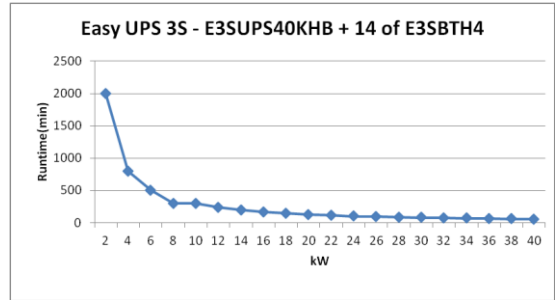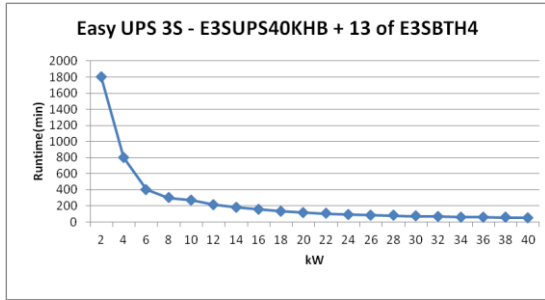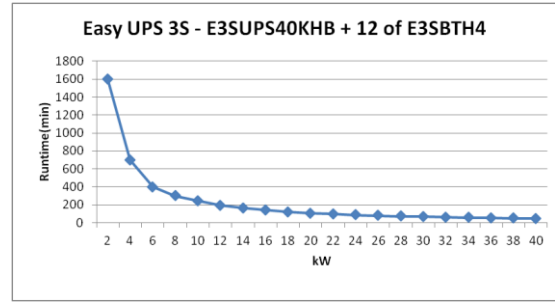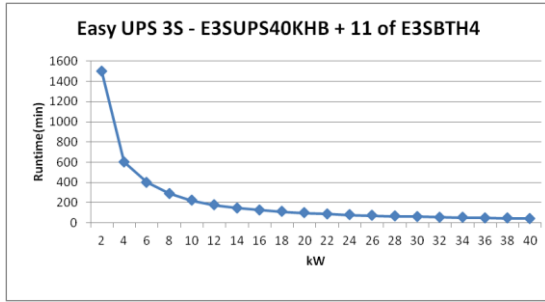

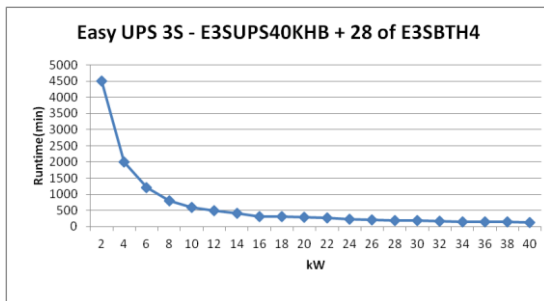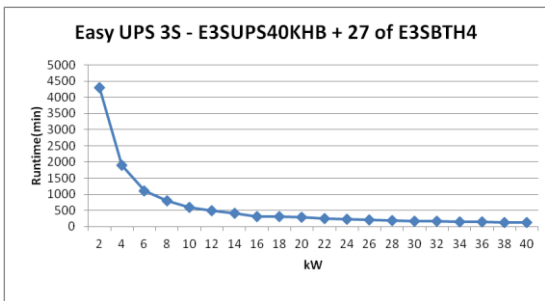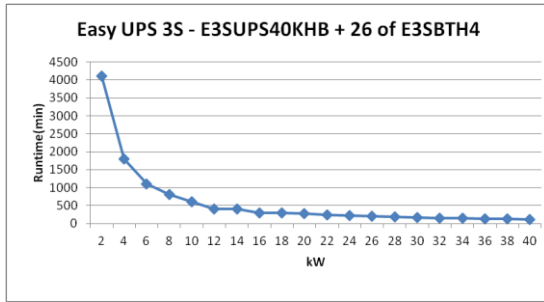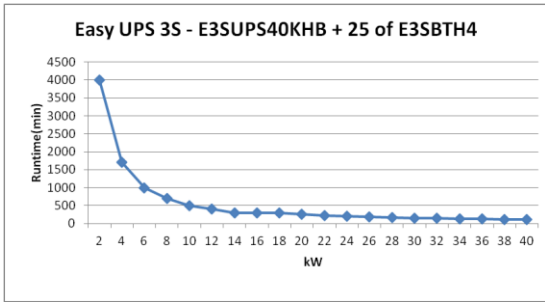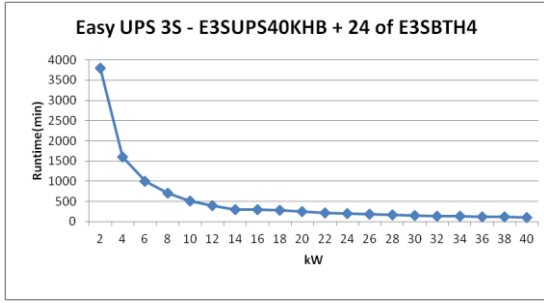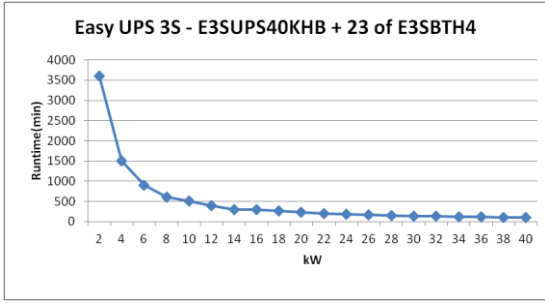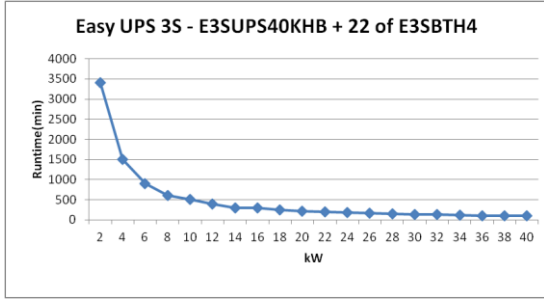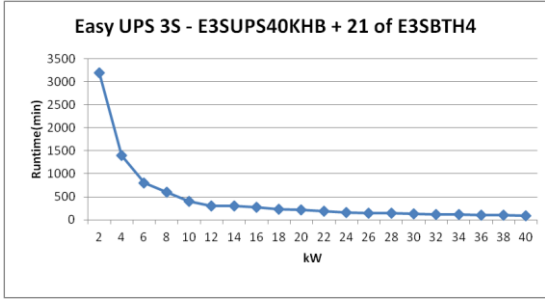

# Easy UPS 3S - 40kVA – Runtime Table

## UPS with battery of E3SBT4

Runtime estimation in minutes										
% of load	kVA	kW	E3SUPS40KHB1 or E3SUPS40KHB + 3 of E3SBT4	E3SUPS40KHB2 or E3SUPS40KHB + 4 of E3SBT4	E3SUPS40KHB + 1 of E3SXR6					
					5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4	10 of E3SBT4
5%	2	2	275	300	500	600	700	900	1000	1100
10%	4	4	120	170	220	280	300	300	400	500
15%	6	6	73	100	135	170	205	240	280	300
20%	8	8	51	73	96	120	145	170	195	220
25%	10	10	38.5	55	73	91.5	110	130	150	170
30%	12	12	30.5	44	58	73	88.5	100	120	135
35%	14	14	24.5	36	48	60.5	73	86.5	100	110
40%	16	16	20.5	30.5	40.5	51	62	73	84.5	96.5
45%	18	18	17.5	26	35	44	53.5	63.5	73.5	83.5
50%	20	20	15	22.5	30	38.5	46.5	55	64	73
55%	22	22	13	20	26.5	34	41.5	49	57	65
60%	24	24	11.5	17.5	24	30.5	37	44	51	58
65%	26	26	10.5	15.5	21.5	27.5	33.5	39.5	46	52.5
70%	28	28	9.4	14	19.5	24.5	30.5	36	42	48
75%	30	30	8.4	13	17.5	22.5	27.5	33	38.5	44
80%	32	32	7.6	11.5	16	20.5	25.5	30	35	40.5
85%	34	34	6.9	10.5	14.5	19	23.5	28	32.5	37.5
90%	36	36	6.3	9.9	13.5	17.5	21.5	26	30.5	34.5
95%	38	38	5.7	9.1	12.5	16.5	20	24	28	32.5
100%	40	40	5.2	8.4	11.5	15	19	22.5	26.5	30.5

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS40KHB + 2 of E3SXR6						E3SUPS40KHB + 3 of E3SXR6		
			11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4	16 of E3SBT4	17 of E3SBT4	18 of E3SBT4	19 of E3SBT4
5%	2	2	1300	1400	1600	1700	1900	2000	2200	2400	2500
10%	4	4	500	600	700	700	800	900	900	1000	1100
15%	6	6	300	300	400	400	500	500	600	600	600
20%	8	8	250	275	300	300	300	300	400	400	400
25%	10	10	190	210	235	255	275	300	300	300	300
30%	12	12	150	170	185	205	220	240	260	280	295
35%	14	14	125	140	155	170	185	200	215	230	245
40%	16	16	105	120	130	145	155	170	180	195	210
45%	18	18	94	100	115	125	135	145	160	170	180
50%	20	20	82	91.5	100	110	120	130	140	150	160
55%	22	22	73	81.5	90	98.5	105	115	125	130	140
60%	24	24	65.5	73	80.5	88.5	96.5	100	110	120	125
65%	26	26	59.5	66	73	80	87.5	94.5	100	105	115
70%	28	28	54	60.5	66.5	73	79.5	86.5	93	100	105
75%	30	30	49.5	55.5	61	67	73	79.5	85.5	91.5	98
80%	32	32	45.5	51	56.5	62	67.5	73	78.5	84.5	90.5
85%	34	34	42	47	52	57.5	62.5	67.5	73	78.5	84
90%	36	36	39	44	48.5	53.5	58	63	68	73	78
95%	38	38	36.5	41	45.5	50	54.5	59	63.5	68.5	73
100%	40	40	34.5	38.5	42.5	46.5	51	55.5	59.5	64	68.5

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS40KHB + 3 of E3SXR6			E3SUPS40KHB + 4 of E3SXR6					
			20 of E3SBT4	21 of E3SBT4	22 of E3SBT4	23 of E3SBT4	24 of E3SBT4	25 of E3SBT4	26 of E3SBT4	27 of E3SBT4	28 of E3SBT4
5%	2	2	2700	2800	3000	3200	3300	3500	3700	3900	4000
10%	4	4	1100	1200	1300	1400	1400	1500	1600	1700	1700
15%	6	6	700	700	800	800	900	900	1000	1000	1000
20%	8	8	500	500	500	600	600	600	700	700	700
25%	10	10	300	400	400	400	400	500	500	500	500
30%	12	12	300	300	300	300	300	400	400	400	400
35%	14	14	260	280	295	300	300	300	300	300	300
40%	16	16	225	235	250	265	280	290	300	300	300
45%	18	18	195	205	215	230	240	255	265	280	290
50%	20	20	170	180	190	200	210	220	235	245	255
55%	22	22	150	160	170	180	190	195	205	215	225
60%	24	24	135	145	150	160	170	180	185	195	205
65%	26	26	120	130	135	145	155	160	170	175	185
70%	28	28	110	120	125	135	140	145	155	160	170
75%	30	30	100	110	115	120	130	135	140	150	155
80%	32	32	96	100	105	110	120	125	130	135	145
85%	34	34	89.5	95	100	105	110	115	120	125	135
90%	36	36	83	88.5	93.5	99	100	105	115	120	125
95%	38	38	78	82.5	87.5	92.5	97.5	100	105	110	115
100%	40	40	73	77.5	82.5	87	91.5	96.5	100	105	110

