
Updating the Firmware via Web Server

Requirements:

- AT-GAIN-M120 / M240
- Firmware file
- Computer on the same network as the AT-GAIN-M120 / M240

1. Download the firmware file from atlona.com and extract the contents of the .zip file to a folder on the computer desktop. The firmware file will be in `.dat` format.
2. Power on the unit and connect an Ethernet cable from the computer, containing the firmware, to the same network where the AT-GAIN-M120 / M240 is connected.
3. Login to the web server.
4. Click **System** > **Maintenance** in the menu bar.

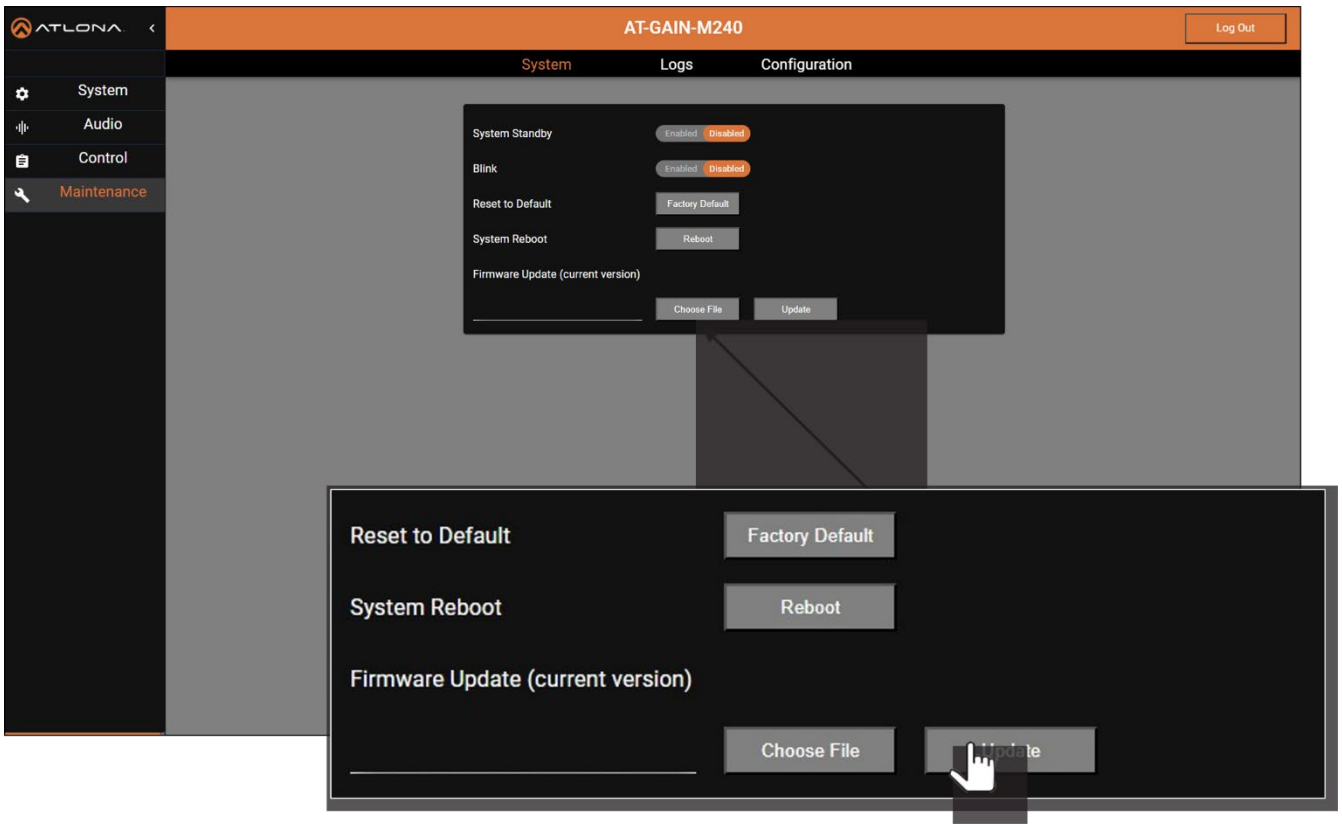

5. Click the **Choose File** button.
6. Browse to the location of the firmware file, select it, and click the **Open** button.
7. Click the **Update** button.

IMPORTANT: Do not power off the AT-GAIN-M120 / M240 during the update procedure.

8. After the update process has been completed, the AT-GAIN-M120 / M240 will automatically reboot.
9. After rebooting, the **Login** screen will be displayed.

