



Belanko™
British standard socket outlets
USB Type-A - Type-C charger

Cat. No(s): 6 170 57/58 - 6 171 44
6 173 44/57/58 - 6 174 44/57/58



6 17X 57

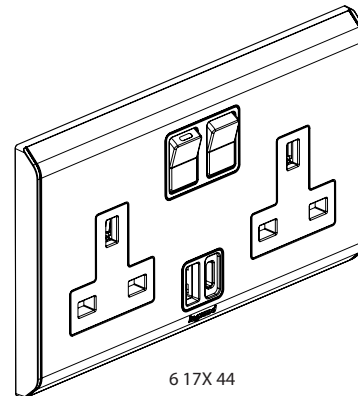

6 17X 44


1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks. Delivered complete Shuttered for child safety.

2. RANGE

Description	White	Dark Grey	Brown
2P+E 1 gang unswitched + 1 USB Type-A (1 output Type-A)	6 170 57	6 173 57	6 174 57
2P+E 1 gang switched + 1 USB Type-A (1 output Type-A)	6 170 58	6 173 58	6 174 58
2 x 2P+E 2 gang switched + 1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)	6 171 44	6 173 44	6 174 44

3. DIMENSIONS (mm)

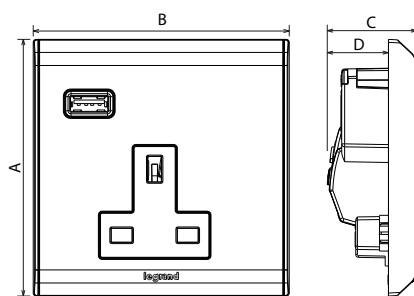

References	A	B	C	D
6 17X 57	86.2	86	30.1	20.6
6 17X 58	86.2	86	32.6	20.6
6 17X 44	86.2	146	30.5	18.5

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 4 x 2.5 mm² - 3 x 4 mm² - 2 x 6mm²
 Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 02

■ **5.2 Material characteristics**

Base: PP
 Cover-plate: PC
 Support frame: PC
 Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Climatic characteristics**

Storage temperature: - 20° C to + 70° C
 Operating temperature: 0° C to + 45° C

■ **5.4 Electrical characteristics**

Voltage: 250 V~
 Current: 13 A
 Frequency: 50/60 Hz

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Type	1 USB	2 USB
Nominal input voltage	220 - 250 V~	
Nominal input frequency	50-60 Hz	
Power consumption	12 W	15 W
Maximum input current	300 mA	
Maximum power consumption in standby	0.075 W	
Power average efficiency	80.3 %	
Nominal output voltage	5 V=	
Maximum output current	2.4 A	3 A*
No-load consumption and average energy efficiency: Level VI**		
Protection class	II - Low voltage	

* **Note** : shared on A and C output

****Note** : European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure to turn it off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.