

SINGLE WAY SMART INTERCOM SYSTEMS



FUNCTION »

- :. Monitoring: See and speak to visitors via the APP from anywhere
- :. Unlock door: when someone pressess the button on the outdoor unit, the smartphone and the indoor unit will ring together. The local remote video intercom will be pushed to your smartphone APP, you can also unlock the door strike remotely by APP, or unlock by the door monitor unit. The door strike needs extra power supply.
- :. Recording: User can take photos or record video via APP
- : Intercom: Two-way voice communication



OUTDOOR UNITS TECHNICAL DATA »




- ... Working Voltage: 12VDC
- ∴ Working Current: ≤ 500mA
- :. IP Rating: IP44
- ... Body material: Metal: anti-oxidation and anti-vandal outdoor unit
- : Night Vision: Supported

INDOOR MONITOR TECHNICAL DATA»



- .:. Connecting wire: 4- core
- ... Ring tone: 16 melody
- .: Working Voltage: 12VDC
- :. Resolution: 800x400
- ∴ Working Current: ≤ 1100mA
- ... Talking time: 120s±10%
- :. Monitoring time: 40s±10%

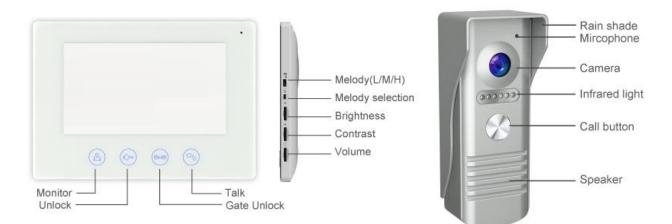

PRODUCT DETAILS »

Model	Description	Monitors QTY	Voltage	Screen	Catalogue number
EL-WF1DP	Single way smart intercom system	1	12VDC	7 inch	195071
EL-WF1DP+1	Single way intercom with 2 monitors	2	12VDC	7 inch	195080
EL-WF1DP+2	Single way intercom with 3 monitors	3	12VDC	7 inch	195076
EL-WF1DP+3	Single way intercom with 4 monitors	4	12VDC	7 inch	195078
EL-WF1DP+4	Single way intercom with 5 monitors	5	12VDC	7 inch	195079



ADDITIONAL INFORMATION »

Catalogue number	Barcode	Packing (pcs) / carton
195071	3800131229700	1
195076	3800131229731	1
195078	3800131229748	1
195079	3800131229755	1

