

TECHNICAL SPECIFICATION

FOUR CHANEL POWER REPEATER



- Used with various LED constant voltage controller, expand output power of the controller to control more lamps.
- A controller can connect unlimited number of LED power repeaters in series or in parallel, and achieve the synchronous control effects.




Technical data:

| Input voltage: | 12-36VDC |
|----------------------|----------------|
| Output current: | 4CH, 5A/CH |
| Output power: | 4 x (60-180) W |
| Working temperature: | -30°C~55°C |
| Product size: | L175×W45×H27mm |
| Net weight: | 114g |
| Catalogue number: | 99REPEATER4 |

LED power supply voltage and power select:

- 12V lamp, Input 12V power supply, can load 0~240W, 24V lamp, Input 24V power supply, can load 0~480W,
- 36V lamp, Input 36V power supply, can load 0~760W. The power supply power must larger than load power 20%.

Dimensions:

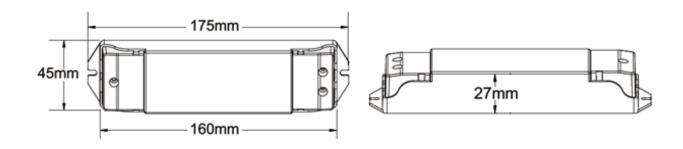

Interface Specification:




elmarkholding.eu



Wiring Diagram:


Series connection

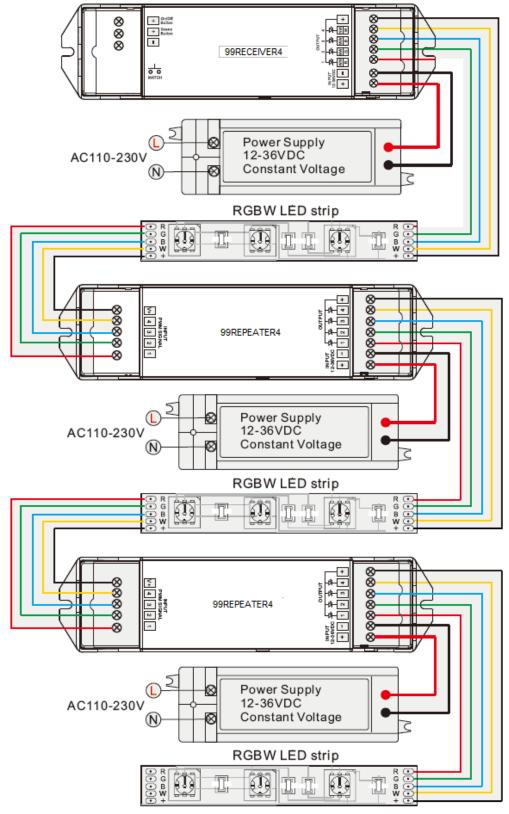

<u>eimarκnolding.eu</u>



Parallel connection

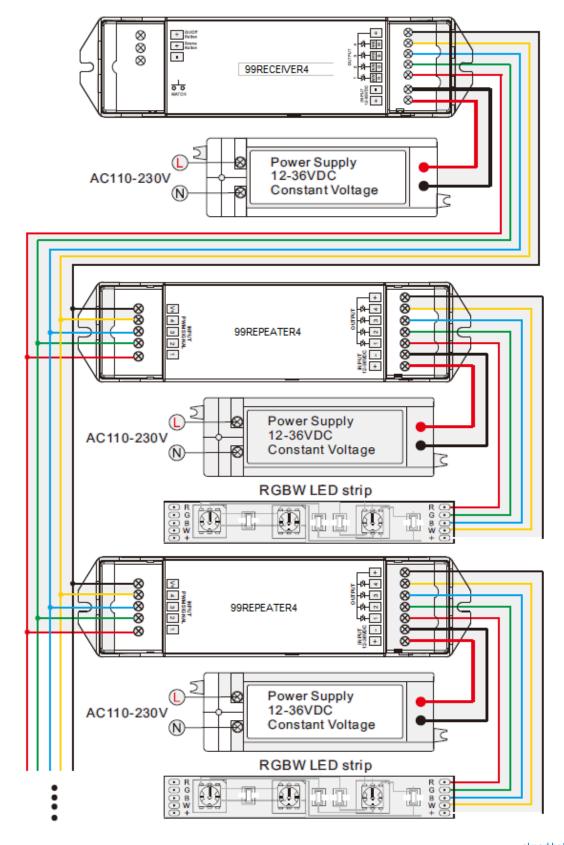

<u>elmarkholding.eu</u>