


Fișă tehnică | Număr articol: 899-631  
Distribution box; for self-assembly; black

[www.wago.com/899-631](http://www.wago.com/899-631)

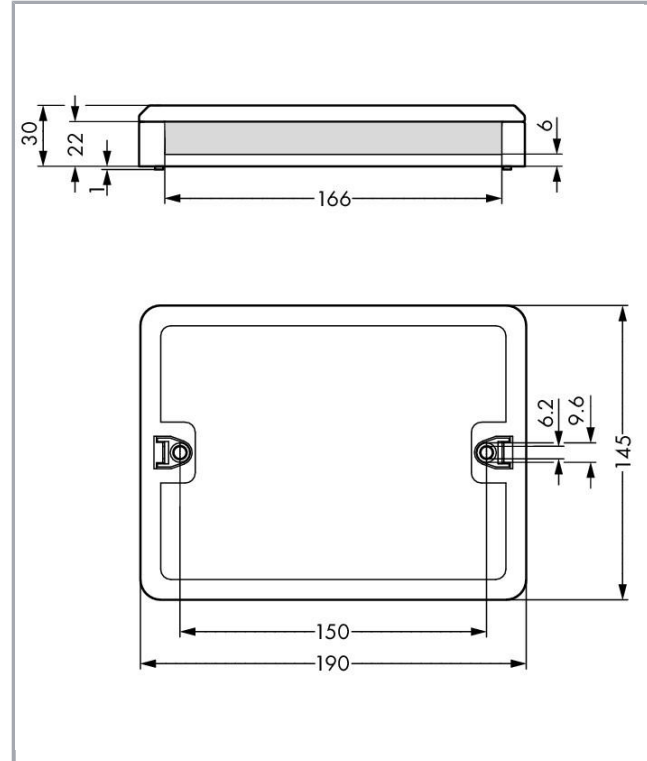

## Descriere articol

### Note on mismatching protection:

All WINSTA<sup>®</sup> components are 100% protected against mismatching when:

- plugging different numbers of poles
- plugging while rotated 180
- plugging while laterally staggered
- plugging one pole

## Date

### Electrical data

Note on Contact Resistance

approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/socket

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

**Ratings per IEC/EN 60664-1**

Ratings per	IEC/EN 60664-1
Legend (ratings)	(III / 3) $\triangleq$ Overvoltage category III / Pollution degree 3

**Geometrical Data**

Width	190 mm / 7.48 inch
Height	30 mm / 1.181 inch
Depth	145 mm / 5.709 inch

**Mechanical data**

Mounting type	Wall, screw mount Installation on mounting plate
Protection type	IP20
Note on protection type	Only when mated (these compact connectors are not designed for use in open, easily accessible areas).

**Plug connection**

Mismating protection	Yes
Locking of plug-in connection	locking lever

**Material Data**

Color	black
Insulation material	Polyamide 66 (PA 66)
Contact material	Copper or copper alloy (surface-treated)
Weight	195,4 g

**Environmental Requirements**

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures $\leq$ 105 °C

**Commercial data**

Packaging type	BOX
Country of origin	DE
GTIN	4055143315630

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.







Customs tariff number

85366990990

## Counterpart

## Produse compatibile

### assembling

	<b>Nr. articol: 770-630</b> Fixing pin; for distribution boxes; Plastic; gray	<a href="http://www.wago.com/770-630">www.wago.com/770-630</a>
	<b>Nr. articol: 770-680</b> Mounting plate; for distribution boxes	<a href="http://www.wago.com/770-680">www.wago.com/770-680</a>
	<b>Nr. articol: 890-302</b> Mounting carrier; 2-pole; for sockets and plugs; Plastic; gray	<a href="http://www.wago.com/890-302">www.wago.com/890-302</a>
	<b>Nr. articol: 890-303</b> Mounting carrier; 3-pole; for sockets and plugs; Plastic; gray	<a href="http://www.wago.com/890-303">www.wago.com/890-303</a>
	<b>Nr. articol: 890-304</b> Mounting carrier; 4-pole; for sockets and plugs; Plastic; gray	<a href="http://www.wago.com/890-304">www.wago.com/890-304</a>
	<b>Nr. articol: 890-305</b> Mounting carrier; 5-pole; for sockets and plugs; Plastic; gray	<a href="http://www.wago.com/890-305">www.wago.com/890-305</a>

## Installation Notes

### Installation




Securing the mounting plate with WINSTA<sup>®</sup>  
Distribution Box to the wall (e.g., via stud gun).

### Application


Supus modificărilor.




The set includes: 1 bottom, 1 lid, 2 sidewalls and 16 mounting pins.

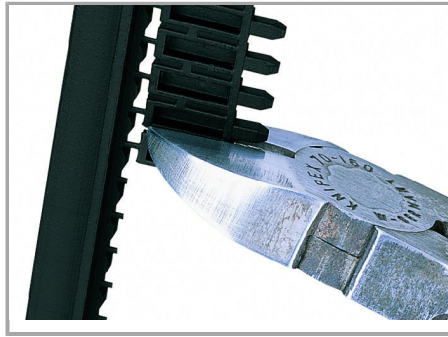

Remove unrequired areas from the sidewalls.

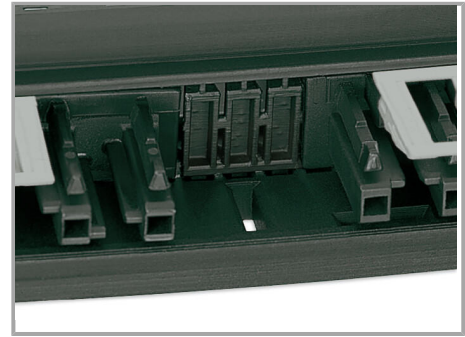

Unassigned slots and spaces are closed by inserting a sidewall.

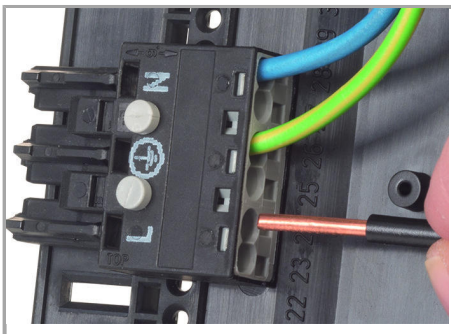

Using mounting pins to secure WINSTA<sup>®</sup> MIDI and WINSTA<sup>®</sup> MIDI special connectors in a distribution box.



Adapter for WINSTA<sup>®</sup> MINI and WINSTA<sup>®</sup> MINI special connectors

## Familie de produse

### <i>WINSTA</i><sup>®</sup> Boxen

WINSTA<sup>®</sup> ist das Steckverbindersystem, das optimal auf die hohen Anforderungen in der Gebäudeinstallation zugeschnitten ist. Es macht die Elektroinstallation steckbar und dadurch schnell, sicher und fehlerfrei. Dies gilt auch in weiteren Anwendungen wie z. B. im Schiffbau, in der Bahntechnik oder in der Industrie.

[Afișare globală produse din familie.](#)

Supus modificărilor.