


Photo shooting table

Installation direction

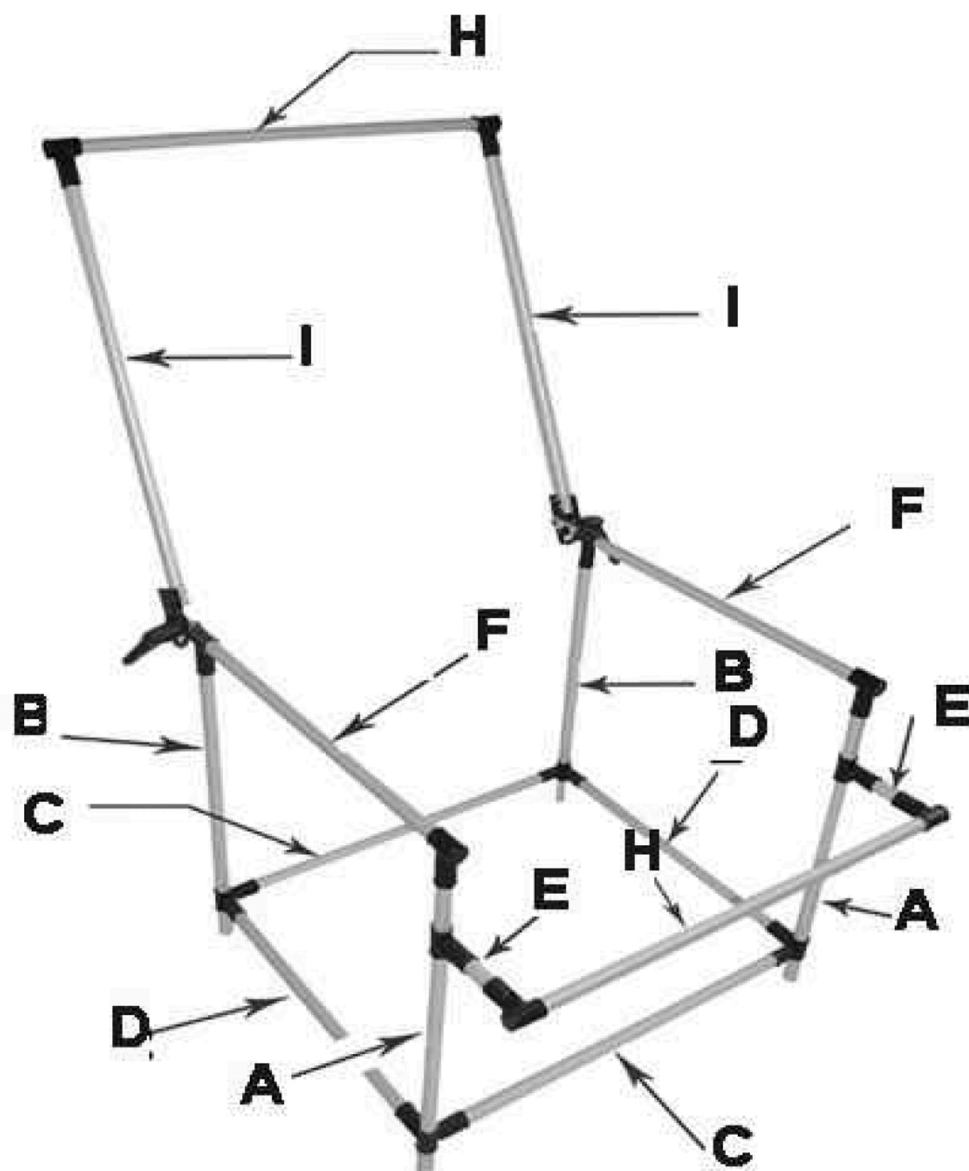

1. According to the schematic drawing, install both A and B tube connect with C tube, install D tube on on both A B C tube.
2. Install the tow F tube up on A&B according to the chart, and lock tighten by rotary switch.
3. Install the corresponding clamp to the tail of F tube on both side, lock tighten the hand shank in a needed angle as the chart.
4. Install two II tube on the corresponding clamps, and lock tighten
5. Install I tube on the top of the two II tube
6. Install the two shortest E tube on both A tube, fix I tube on the top of E tube, lock and tighten.
7. User can decide the position of the two K clamp with copper, is mainly used to when placed below the film and television lamp lighting with.
8. Put the plastic board on the frame, In the most top shall prevail to down well, tighten by J clamp(note: clip should be evenly distributed)

Measures

Name	Units	Diameter	Length
A	2	19mm	500mm
B	2	19mm	500mm
C	2	19mm	458mm
D	2	19mm	558mm
E	2	19mm	100mm
F	2	19mm	600mm
H	2	19mm	500mm
I	2	19mm	608mm