

## LED Light User Instruction


Thanks for purchasing YAKE products. LED60WSI is a professional integrated LED fluorescent light with high light, accurate color temperature and aluminum robust construction, build-in cooling fan without noise, can provide a longer lifetime, perfect for video and photography use in the studio. Accessories includes soft-box, umbrella and 3-in-1 barn door are optional.

### Precaution

- 1、 Do not vibrate the products strongly, otherwise may cause damage.
- 2、 Please turn off the power when not use the product frequently.
- 3、 Keep away from the direct sunlight, high temperature and closed car.
- 4、 Keep drying or it may lead to damage when the products immerge into water or in touch with wet hand.
- 5、 It can cause fire and explosion in flammable and explosive occasions.

### Structure

- 1、 power switch
- 2、 input plug for AC110-220V
- 3、 output power dimmer
- 4、 head locking handle
- 5、 stands locking screw
- 6、 integrate chip
- 7、 radiator hole

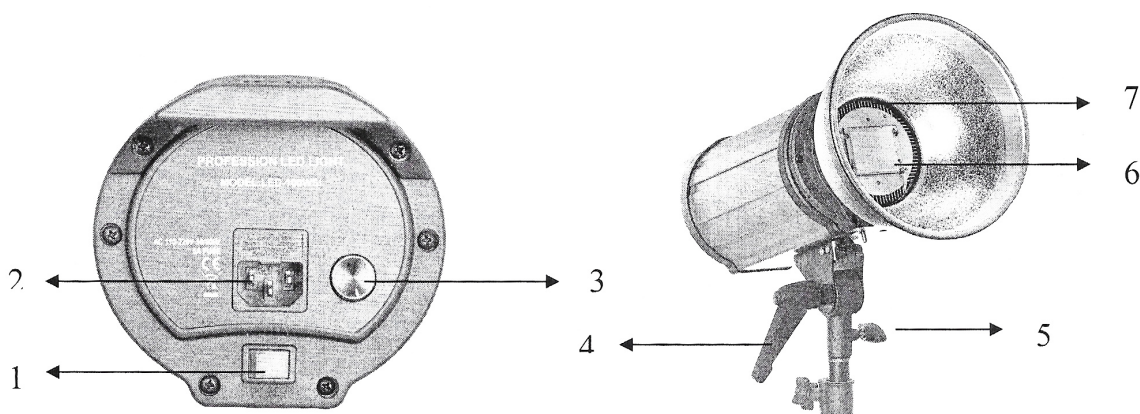

BUY ON  
[www.cablematic.com](http://www.cablematic.com)

### Installation

- 1、install the power
  - a、Insert the power adapter (enclosed accessories) into the lamp body's input power socket correctly.
- 2、install the LED light
  - a、Put the LED light mounted into the light stand then lock the screw.
  - b、Adjust the angle of light then lock the handle.

### **Usage method**

- 1、turn on the power
  - a、Turn on the power switch.
  - b、Adjust the output power dimmer, searching for the best bright.

### **Specification**

input voltage: 110-220V

power : 60W

Lux: 6000LM

color temperature: 5500K

color rendering index:  $\geq 85$

bright angle: 55°

average lifetime: 60,000 hours