☆ 4S-RECORD ☆ 4S-USB ☆ 4S-USB/TF ☆ 4S-BLUETOOTH

Max power : 15w(20w)

Body material :plastic

Portable, strong, loud, broadcast range 400m

Built-in lithium battery, charging cable included

Read pen-driver, play MP3/WAV

Built-in siren &45-345 seconds recording

SPECIFICATIONS

Power Output: 10w Rated / 15w (20w) Max

Voice Range: 0.4km

Power Source: Rechargeable Lithium Battery

Battery Life: 6-15 hrs.

Working Voltage: DC-3.7V

Dimensions: Horn Dia.130mm(150mm), Length 210mm(230mm)

Weight: 0. 50 kg with cells

OPERATION

1. Insert one lithium battery into the hand shank.

Shortly press the first button on the left, the power indicator light is on. You can speak now.

 Shortly press the MUSIC/S button to play music. Long press the music/s button to play the alarm.

4. Shortly press the REC button, you will see the recording indicator light will be on. Now you can speak to the microphone to record. And the recording time is 120 seconds.

When you finish recording, shortly press the REC button, and then the recording indicator light will be off, it means the recording is over.

Shortly press the PLAY button, the machine can play the material of your record circularly. And press it again to stop.

6. Insert U-disk or TF-card, MP3 can be played.

Select the former piece of the music (Press shortly)

Decrease volume (Press long)

Pause/ Play (Press shortly)

Single Cycle (Press long)

Select the next piece of the music (Press shortly)

increase volume (Press long)

7. When the machine is playing the Mp3 songs, you can long press the button of the LED will be flash quickly, and the current song will be looping. If you do it again, the single cycle will be cancel.


8. When the lithium battery is completely charged, the LED will be off.

How to connect the mobile phone by Bluetooth?

Shortly press the POWER button, the LED is on. Then long press the POWER button, the LED flashed slowly, the megaphone is waiting for be connected. Now open the Bluetooth setup menu from your Bluetooth-enable device in your mobile phone, search for the Bluetooth ID (Megaphone Bluetooth) then connect it. When the LED flashed quickly. It means Bluetooth connect Successfully. If long prees the POWER button, the LED stop flashing. The Bluetooth connect is broken.

LITHIUM BATTERY INSTALLAND REMOVE ILLUSTRATE



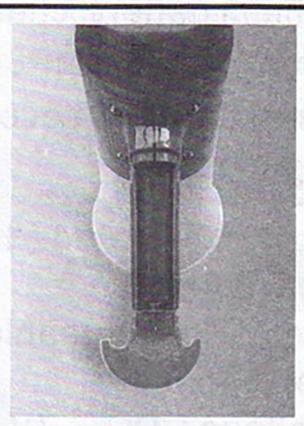

Open the battery cover Put the battery into the hand shank

⚠ Notes

- 1. Make sure the polarities of the lithium battery when you insert.

 Normally the end with spring should be connecting with the negative polarity.
- 2. Charge the lithium battery for 5-8 hours before the first use.
- 3. After the lithium battery is fully charged, the indicator light will be off.
- Please recharging the lithium battery when you notice the indicator light darken, the sound turns lower than normal or the megaphone does not run correctly.
- You must turn off the power when you do not use it. Otherwise the lithium battery will be damaged.
- 6. You must charge the lithium battery fully when you prepare to stop using the machine tor long.

BATTERY CHARGING

Charger Adaptor Input: AC 110-240V 50/60Hz Output: DC 5V === 500MA

