with USB Disk / USB-Audio

200M USB HID Extender over CATx Cable

Specifications

Model	Local Unit	Remote Unit	Remote Unit
	USBX-120L	USBX-120R	USBX-130R
Interface	Mini-USB x 1	USB-A x 4	USB-A x 4
Extension Distance*	200M (CAT5e)		
LED Indicator	x 1	x 1	x 1
Power Supply	Power by PC	DC 5V, 2A (typical)	DC 5V, 2A (typical)
USB Disk/ USB-Audio Switch	N/A	N/A	x 1
Link Connection	RJ45 (CATx)		
Dimensions (H x W x D)	22 x 52 x 80 (mm)		
Weight (g)	150-175		

*Above video resolution and extension distance are based on a single CAT5e/6 24AWG solid cable without cascade. STP cabling is recommended for environments with high EMI or RFI. For the best performance results, using stranded cabling or other thinner cables, and coiling of excess cable lengths should be avoided.



[USBX-M120] (USBX-120L + USBX-120R)



[USBX-M130] with USB Disk / USB-Audio

(USBX-120L + USBX-130R)

➤ Related Products

0.13411.44050.7	
SHMU-M250 / SHMU-M250WW USB2.0 + HDMI Extender (Short Haul) 1080p Box / Wallplate	50M
HDRaseT LISE HID + HDMI Extender 4K@60Hz Boy	100M 70M
EVBMU-M2010 HDBaseT 2.0 USB 2.0 + HDMI Extender 4K@30Hz Box 1	100M
EVXU-M210 USB HID + VGA Extender 1080p Box 1	150M
NXMU-M220	100M

Features


- Extend 4 USB signal transmission up to 200M by CAT5e/6/7 Cable
- Support USB 1.2 high-speed host controllers (USB 1.1, 2.0 compatible)
- Plug-n-Play system without requiring any drivers or software installation
- Suitable for most of popular USB HID devices (USB keyboards, USB mouses, and USB touch screens)
- 4 USB ports available and expandable via applying additional USB hubs
- Unique mechanism design of two ports on top for easily connecting USB peripherals.
- Local Unit can be powered by the host PC
- Compact size for convenient installation and space saving
- Fully compatible with Windows, Mac and Linux system
- USB-Disk or USB-Audio Support (For USBX-M130 only)

Remarks: For USBX-M130

*USB Disk Mode: Support Transmission of USB Storage Device (USB1.1 mode) USB-Audio Mode: Support USB Audio transmission. (Connect to Speaker) Note: For the USB-Disk or USB-Audio, you can only use one at one time. Also, for either one device, you can only insert one on the unit. Otherwise, the USB-devices may not be functioning properly.

Connection Pattern



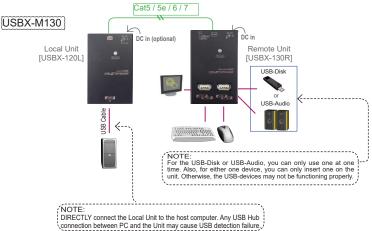

* Actual product may vary from photos.

