


# LED Phoenix Light

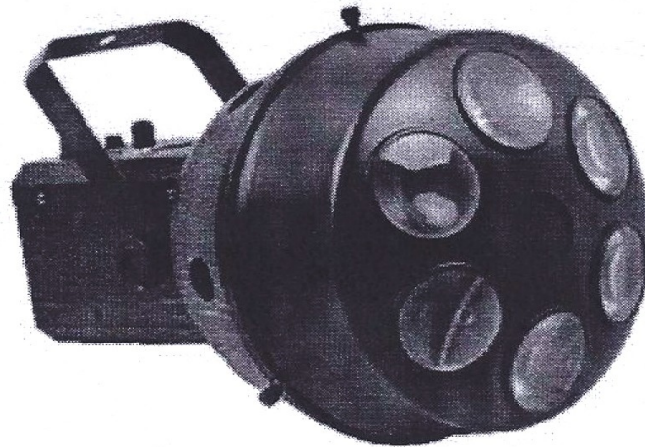

## Address code setting:

ON	OFF	Function
1 10	2 3 4 5 6 7 8 9	DMX512 can be link with other light
9	1 2 3 4 5 6 7 8 10	Color changing
2 9	1 3 4 5 6 7 8 10	Full color, strobe effect, speed adjustable
1 2 3 9	4 5 6 7 8 10	Color changing, speed adjustable

Channel	512 value	Effect
CH1	0-152	Light on
CH1	153-242	Strobe
CH1	243-255	All lights on
CH2	0-255	Blue light on
CH3	0-255	Green light on
CH4	0-255	Red light on

## DMX 512 Address code setting

No.	(ID) Initial value	Binary value (ON)
1	1	1 10
2	2	1 5 10
3	3	1 6 10
4	4	1 5 6 10
5	5	1 7 10
6	6	1 5 7 10
7	7	1 6 7 10
8	8	1 5 6 7 10
9	9	1 8 10
10	10	1 5 8 10
.....	.....	.....