

User' s Manual

Product name:Moonflower 469 LED colorful light

Thanks you to chooseing our prduct. For your safety, please carefully read this manual before your operation.

Features as the following:

LED Lamp 162pcs high power LED. RGB three colors, change 35 kinds of innervation change also the speed can adjust.

4 DMX Channels

4 operation modes:Automatic running, DMX, Sound Active, Master/Slave

Strobe function

Long life LEDlight source-no light bulbs to replace

Razor sharp beams, Colors do not fade in time

Produce bright mulit-colored beams of light, but very little heat

162pcs total LEDs:60 Red, 36 Green, 66 Blue

Voltage: AC110V/120V OR AC220V/240V 50/60HZ

Power Supply:50W


Size: L340*W340*H340mm Weight:5kg

INSTALLATION:

1. Fixud it at any place, but the distance between the colorful gobo light and other objects and person should be at least 1M. and ensure fastness well

Do safety measure will. The light should earthing safety.

2. Ensure the voltage and frequency of the factory enactment are suit your loeale you can open it after connect it will.

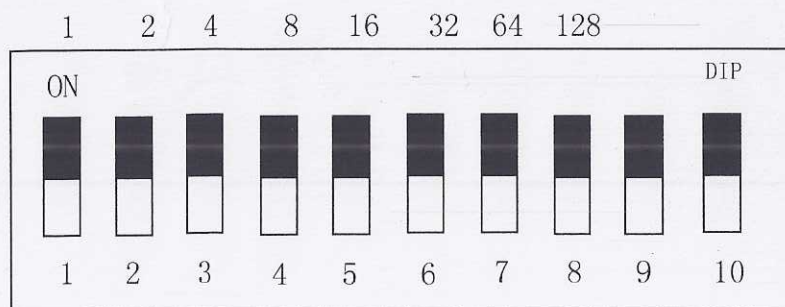

OPERATION INTRODUCTION

DMX512 controller control introduction

DMX channel	DMX value	Specitication
Channe2-4 RGB color control	CH2 0 ↔ 255	RED Iuminance weak ↔ strong
	CH3 0 ↔ 255	Green Iuminance weak ↔ strong
	CH4 0 ↔ 255	Blue Iuminance weak ↔ strong
Channel1	0 ↔ 24	RGB color control
	25 ↔ 49	Model1
	50 ↔ 74	Model2
	75 ↔ 99	Model3
	100 ↔ 124	Model4
	125 ↔ 149	Model5
	150 ↔ 174	Model6
	175 ↔ 199	Model7
	200 ↔ 224	Automatic mode
	225 ↔ 255	Red LED all bright displly

DMX address instroction under master slave mode

Function	Introduction
8	Auto-running mode
7	Sound control model
6	All bright
5	Model1
4	Model2
3	Model3
2	Self-motion run speed2(quick)
1	DMX Program stand by