Cartridge Fuses Glass, Time-Lag, Ф5.2mm x 20mm





RoHS Compliant


Description

This series time-lag fuse with low breaking capacity for use with printed circuit boards is used in a large variety of applications. This Φ 5mm × 20mm device is constructed of a glass tube with electro-plated brass end caps. This series with 250V AC rating and 35A or 10In Ampere breaking capacity, offers excellent quality and is 100% tested for cold resistance and precise length.


Features

- · Miniature fuse with time-lag, low breaking capacity
- Φ5mm × 20mm physical dimensions
- · Glass tube, encapsulated design with nickel plated brass end caps
- · Protection against harmful over-currents in primary and secondary applications.
- · Designed compliant to IEC 60127-2/III

Mechanical Specifications



Dimensions



Electrical Specifications

Time vs Current Characteristics Table

(measured with constant current power supply)

Time vs Current Characteristics: IEC 60127-2/III									
Rated Current	100%	210%	275%	400%	1000%				
100mA	>1h	<2min	200ms-10s	40ms-3s	10ms~300ms				
125mA~10A	>1h	<2min	600ms~10s	150ms~3s	20ms~300ms				
12A~16A	>30min	<5min	600ms~15s	150ms~5s	20ms~400ms				

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro




Dimensions: Millimetres

Cartridge Fuses Glass, Time-Lag, Ф5.2mm x 20mm



Average Time Current (I-T) Curves

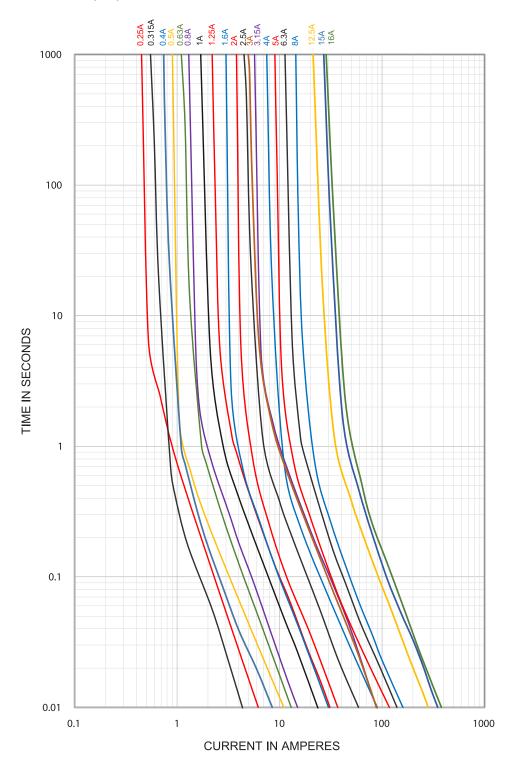

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



Cartridge Fuses Glass, Time-Lag, Φ5.2mm x 20mm




Electrical characteristics

Electrical Characteristics at 25°C														
Amp Code Rated Current	Rated		Max Voltage Drop(mV)	Max.Power Dissipation (W)	Nominal Melting I²t (A²sec)	Typical cold Resistance (mΩ)	Breaking Capacity	Approvals						
	Current							VDE	cqc	cURus	PSE	CCC	KC	TUV
MP008903	3.00A	250V AC	120	1.6	78	19.1	35A or 10In@250V AC	0	0	•	0	0	0	0
MP008904	3.15A		100		98	17.2		•	0	•	•	•	•	0
MP008905	5.00A				139	10.8		•	0	•	•	•	•	0

Notes: (1) Permissible continuous operating current is 100% at ambient temperature of 23°C (73.4°F)

(2) The current values used for calculating I2T should be within the standard range of 8ms ~ 10ms.

Temperature Derating Curve

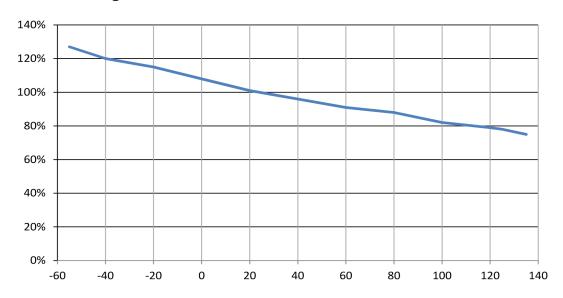

Part Number Table

Description	Part Number		
Cartridge Fuse,Time-Lag, Φ5.2mm × 20mm, 3A, 125V AC, Clip Mount	MP008903		
Cartridge Fuse,Time-Lag, Φ5.2mm × 20mm, 3.15A, 125V AC, Clip Mount	MP008904		
Cartridge Fuse,Time-Lag, Φ5.2mm × 20mm, 5A, 125V AC, Clip Mount	MP008905		

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Page <3>

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

