### **ZB5AW743**

Head for illuminated emergency switching off push button, Harmony XB5, plastic, red mushroom 40mm, 22mm, universal LED, turn to release





#### Main

Range of product	Harmony XB5
Product or component type	Head for illuminated emergency switching off push- button
Device short name	ZB5
Product compatibility	Universal LED
Bezel material	Dark grey plastic
Mounting diameter	22 mm
Sale per indivisible quantity	1
Head type	Standard
Shape of signaling unit head	Round
Type of operator	latching
Reset	Turn to release
Operator profile	Red mushroom Ø 40 mm, unmarked

#### Complementary

CAD overall width	40 mm		
CAD overall height	40 mm		
CAD overall depth	50 mm		
Product weight	0.022 kg		
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m		
Mechanical durability	300000 cycles		
Main group	Switching off		
Group of product	Emer swi off illum turn to rel		
Station name	XALD 1 cut-out		
	XALK 1 cut-out		
Cap/operator or lens colour	Red		
Marking	Unmarked		
Electrical composition code	M6 for <2 contacts using single blocks in front mounting with integral LED and transformer		
	M10 for <2 contacts using single blocks in front mounting with integral LED		
	MF1 for <2 contacts using single blocks in front mounting with integral LED MR1 for <2 contacts using single blocks in rear mounting with integral LED		
Device presentation	Basic sub-assemblies		

#### Environment

Protective treatment	TC			
Ambient air temperature for storage	-4070 °C			
Ambient air temperature for operation	-4070 °C			
Overvoltage category	Class II conforming to IEC 60536			
IP degree of protection	IP66 conforming to IEC 60529 IP69 IP69K			
NEMA degree of protection	NEMA 13 NEMA 4X			
IK degree of protection	IK05 conforming to EN 50102			

Standards	EN/IEC 60947-5-4		
Claridardo	EN/IEC 60947-1		
	GB 14048.5		
	EN/IEC 60947-5-1		
	CSA C22.2 No 14		
	JIS C8201-5-1		
	UL 508		
	JIS C8201-1		
Product certifications	UL listed		
	LROS (Lloyds register of shipping)		
	BV		
	GL		
	CSA		
	DNV		
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6		
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC		
	60068-2-27		
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27		

#### **Packing Units**

. doming office	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.6 cm
Package 1 Width	4.2 cm
Package 1 Length	5.4 cm
Package 1 Weight	36.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	120
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	4.85 kg

## Offer Sustainability

Green Premium product			
☑ REACh Declaration			
Yes			
Pro-active compliance (Product out of EU RoHS legal scope) EVEL RoHS  Declaration			
Yes			
Yes			
☑ China RoHS Declaration			
₽¥Yes			
Product Environmental Profile			
<sup>©</sup> End Of Life Information			


#### Contractual warranty

Warranty	18 months

# Product data sheet Dimensions Drawings


# **ZB5AW743**

#### **Dimensions**



#### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

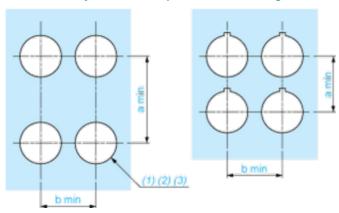

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0$  <sup>+0.4</sup>) / Ø0.89 in. recommended (Ø0.88 in.  $_0$  <sup>+0.016</sup>)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


#### **Detail of Lug Recess**



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_{0}$  <sup>+0.4</sup>) / Ø0.89 in. recommended (Ø0.88 in.  $_{0}$  <sup>+0.016</sup>)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

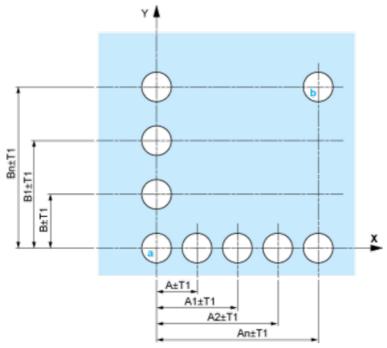


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

#### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

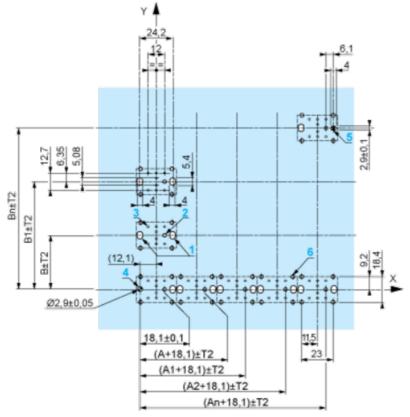

A: 30 mm min.

B: 40 mm min.

Dimensions in in.

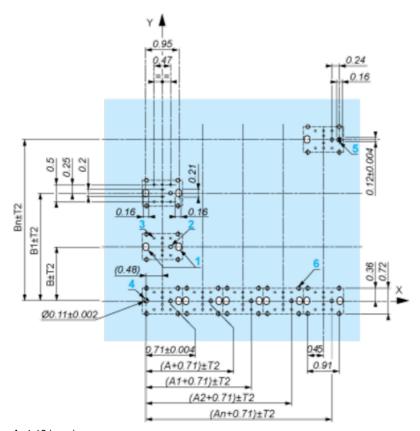

A: 1.18 in. min. B: 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - o every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

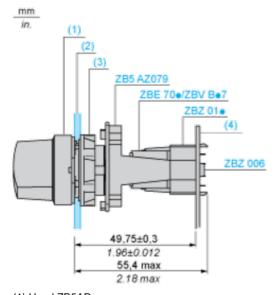

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut

#### (4) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01 $\cdot$ .

# Product data sheet Technical Description

## **ZB5AW743**

Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



#### Legend

Single contact

Double contact

Light block

Possible location