

FEATURES

- Fix input unregulated single output
- Continuous short-circuit protection.
- Industry standard pin-out
- I/O isolation test voltage 1.5KVDC
- No-load input current as low as 8mA
- Operating temperature range
 40°C to +105°C
- High efficiency up to 81%
- IEC62368, UL62368, EN62368 approved

RS PRO 1W isolated DC-DC converters

- 2233666,2233667,2233669,2233672,2233674,
- 2233675,2233677,2233680,2233681



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



Product Description

PCB Mount DC-DC converters are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits. Featuring continuous short circuit protection and no-load input current as low as 8mA

General Specifications

| Model | DC-DC 1W Isolated DC-DC converter | |
|---------------|--|--|
| Mounting Type | PCB | |
| MTBF | MIL-HDBK-217F@25°C > 3,500,000 hrs | |
| Applications | Industrial control systems, instrumentation, analog, relay-driven and data switching circuits. | |

| 20.01 1 11 | Input Voltage | (Vdc) | Output | Output | | Max. Capacitive | Efficiency |
|-----------------|---------------|-------|---------|--------------------|---------|-----------------|------------|
| RS Stock# | Nominal | Max | Voltage | Current Max/Min | Wattage | Load(μF) | (Тур) |
| 2233666 | | | 3.3V | 303/30mA | 1W | 2400 | 75% |
| 2233667 | 12V | | 5V | 200/20mA | 1W | 2400 | 80% |
| 2233669 | (10.8-13.2) | | 12V | 83/9mA | 1W | 560 | 80% |
| 2233672 | | | 24V | 42/5mA | 1W | 220 | 81% |
| 2233674 | | | 3.3V | 303/30mA | 1W | 2400 | 75% |
| 2233675 | | | 5V | 200/20mA | 1W | 2400 | 79% |
| 2233677 | 24V | | 9V | 111/12mA | 1W | 1000 | 80% |
| B2412S-1WR3(RS) | (21.6-26.4) | | 12V | 83/9mA | 1W | 560 | 81% |
| 2233680 | | | 15V | 67/7mA | 1W | 560 | 81% |
| 2233681 | | | 24V | 42/5mA | 1W | 220 | 81% |



Input Specifications

| Input Specification | | | | | | |
|--|---------------|--------------------------|------|------------|----------|------|
| Item | Operating Con | ditions | Min. | Тур. | Max. | Unit |
| | | 3.3VDC output | - | 112/8 | 118/ | |
| | 12VDC input | 5VDC/12VDC output | | 105/8 | 110/ | |
| | | 24V output | | 103/8 | 109 / | |
| Input Current (full load / no-load) | | 3.3VDC output | - | 56/8 | 61/ | |
| no loddy | 24VDC input | 5VDC output | | 53/8 | 58/ | mA |
| | | 9VDC output | | 53/8 | 57/ | |
| | | 12VDC/15VDC/24VDC output | | 52/8 | 56/ | |
| Reflected Ripple Current | Nominal input | Nominal input voltage | | 15 | - | |
| Constitution (Assessed) | 12VDC input | | -0.7 | - | 18 | VDC |
| Surge Voltage (1sec. max.) 24VDC input | | | -0.7 | - | 30 | VDC |
| Input Filter | | | (| Capacitanc | e Filter | |
| Hot Plug | | | | Unavaila | able | |

Output Specifications

| Output Specification | | | | | | |
|--------------------------------|---------------------------|--|---------|------------|--------------|----------|
| Item | Operating Con | Operating Conditions | | Тур. | Max | Unit |
| Voltage Accuracy | | | See out | put regula | ition curves | (Fig. 1) |
| | Innut voltago | 3.3VDC output | - | - | ±1.5 | |
| Linear Regulation | Input voltage change: ±1% | 5VDC/9VDC/12VDC/15VDC & 24VDC output | - | - | ±1.2 | |
| | | 3.3VDC output | - | 8 | 20 | 0/ |
| Load Regulation 10% -100% load | | 5VDC output | | 5 | 15 | % |
| | | 9VDC/12VDC & 15VDC output | | 3 | 10 | |
| | 24VDC output | - | 2 | 10 | | |
| Temperature Coefficient | 100% load | | - | ±0.02 | - | %/°C |
| Rinnle & Noise * | 20MHz | 3.3VDC/5VDC/9VDC/12VDC & 15VDC output | - | 30 | 75 | mV p-p |
| | bandwidth 2 | 24VDC output | | 50 | 100 | |
| Short circuit Protection | | | Со | ntinuous, | self-recove | ery |
| | | | | | | |


Note: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.





General Specifications

| Item | Operating Conditions | Min | Тур | Max. | Unit |
|---|---|---------|--------------------|-----------|-----------|
| Isolation | Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max. | 1500 | - | - | VDC |
| Insulation Resistance | Input-output resistance at 500VDC | 1000 | - | - | МΩ |
| Isolation Capacitance | Input-output capacitance at 100KHz/0.1V | | 20 | | pF |
| Operating Temperature | Derating when operating temperature≥85°C, (see Fig. 2) | -40 | - | +105 | °C |
| Storage Temperature | | -55 | - | +125 | |
| Case Temperature Rise | Ta=25°C | - | 25 | - | |
| Storage Humidity | Non-condensing | 5 | - | 95 | %RH |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds | - | - | +300 | °C |
| Vibration | | 10-150H | z, 5G, 0.75 Z a | imm. alon | g X,Y and |
| Switching Frequency * | Full load, nominal input voltage | | 260 | - | KHz |
| MTBF | MIL-HDBK-217F@25°C | | 3500 | | K hours |


Typical Performance Curves

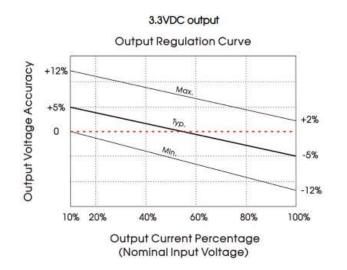

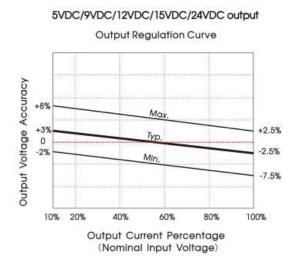






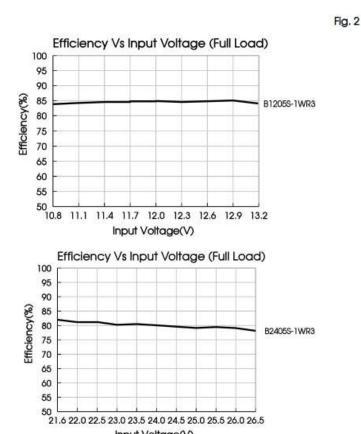

Input Voltage(V)

Efficiency Vs Output Load(Vin=12V) 100 90 B1205S-1WR3 80 70 Efficiency(%) 60 50 40 30 20 10 10 30 40 50 60 Output Current Percentage (%)

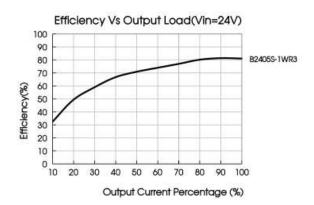

Design Reference

Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3. Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.





Table 1: Recommended input and output capacitor values

| Vin | Cin | Vout | Cout |
|-------|-----------|--------|-----------|
| 12VDC | 2.2μF/25V | 3.3VDC | 10μF/16V |
| 24VDC | 1μF/50V | 5VDC | 10μF/16V |
| | | 9VDC | 2.2μF/16V |
| | | 12VDC | 2.2μF/25V |
| | | 15VDC | 1μF/25V |
| | | 24VDC | 1μF/50V |



EMC compliance circuit

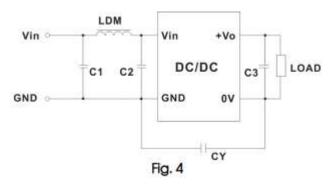

| | C1 | 4.7μF /50V |
|-----------|-----|------------------------------|
| | C2 | 4.7μF /50V |
| Emissions | CY | 270pF/2kV |
| | C3 | Refer to the Cout in table 1 |
| | LDM | 6.8µH |

EMC Specifications


| Funitariana | CE | CISPR32/EN55032 CLASS B | |
|---|-----|--|------------------|
| Emissions | RE | CISPR32/EN55032 CLASS B | |
| Immunity | ESD | IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. | Perf. Criteria B |
| Note: Refer to Fig.4 for recommended circuit test | | | |


Mechanical Specifications

| Case material | Black plastic; flame-retardant and heat-resistant (UL94-V0) | |
|----------------|---|--|
| Dimensions | 1.60 x 6.00 x 10.16 mm | |
| Weight | 1.3g (Typ.) | |
| Cooling Method | ree air convection | |



Dimensions and recommended layout

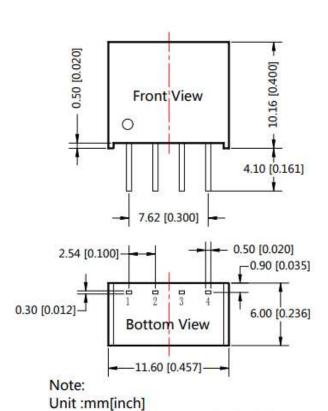

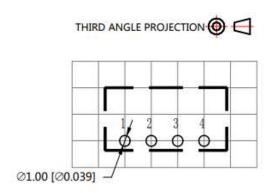

Note: Grid 2.54*2.54mm

| Pin-Out | | |
|---------|----------|--|
| Pin | Function | |
| 1 | GND | |
| 2 | Vin | |
| 3 | OV | |
| 4 | +Vo | |

Approvals

Safety Certification IEC62368, UL62368, EN62368 approved

Pin section tolerances :±0.10[±0.004] General tolerances:±0.25[±0.010]

- 1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet.
- 2. The maximum capacitive load offered were tested at input voltage range and full load.
- 3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $Ta=25^{\circ}C$, humidity
- 4. Our products shall be classified according to ISO14001 and related environmental laws and regulations.