# **PHILIPS** Lighting



# EB-Certalume for TL5 lamps

## EB-Ci 1-2 14-28W 220-240V 50/60 Hz

Affordable, reliable, high-frequency electronic ballast for TL5 fluorescent lamps, ideal alternative to electromagnetic fluorescent systems The cost-saving and reliable EB-C has energy efficiency class A2, and its robust design meets all necessary international standards for safety and EMC. ;The ballast is primarily designed for Indoor application. For outdoor application, the luminaire should be minimum Classland need to be sufficiently protected against water & dust. The installation should also be guard against any lightening surge or any other necessary electrical protection as deemed in such typical installation & application.

#### **Product data**

General Information			
Lamp Type	TL5		
Number of Lamps	1-3 piece/unit		
Suitable For Outdoor Use	No		
Number of Products on MCB (16A Type B)	30		
(Max)			
Automatic Restart	Yes		
Operating and Electrical			
Input Voltage	220-240 V		
Input Frequency	50 or 60 Hz		
Operating Frequency (Nom)	42-60 kHz		
Ignition Method	Warm Start		
Crestfactor (Max)	1.7		
Ignition Time (Nom)	2.0 s		
Mains Voltage Performance (AC)	-10%-+10%		
Mains Voltage Safety (AC)	198264V		


Earth Leakage Current (Max)	0.5 mA
Inrush Current Width	0.224 ms
Ballast Factor (Nom)	1
Power Factor (Max)	0.98
Power Factor (Min)	0.90
Input Power (Max)	60.1 W
Input Power (Min)	16.6 W
Power Losses (Max)	4.8 W
Power Losses (Nom)	2.1 W
Inrush Current Peak (Max)	17 A
Rated Lamp Power	14-28 W
Wiring	
Connector Type Input Terminals	Insert
Cable Capacity Output Wires Mutual (Max)	150 pF
Connector Type Output Terminals	Insert
Cable Length Hot Wiring	0.75 m

### EB-Certalume for TL5 lamps

Wire Striplength	7.5-8.5 mm		
Input Terminal Cross Section	0.50-1.50 mm²		
Output Terminal Cross Section	0.50-1.50 mm²		
Cable Capacity Output Wires to Earth (Max)	150 pF		
Connector Type	Insert		
System characteristics			
Rated Lamp Power on TL5	14-28 W		
System Power on TL5	16.6-60.1 W		
Lamp Power on TL5	14.5-27.8 W		
Power Loss on TL5	2.1-4.8 W		
Temperature			
T-Ambient (Max)	50 °C		
T-Case Lifetime (Max)	75 ℃		
T-Case Maximum (Max)	75 ℃		
T-Ignition (Max)	50 °C		
T-Ignition (Min)	-10 °C		
Mechanical and Housing			
Housing Material	Plastic		
Housing	L210x30x26mm		
Emergency Operation			
Battery Voltage Lamp Ignition	165-253 V		
Approval and Application			
Energy Efficiency Index	A2		

IP Classification	IP 20 [ Ingress Protection 20]
EMI 9 kHz 30 MHz	EN55015
EMI 30 MHz 1000 MHz	EN 55015
Safety Standard	IEC 61347-2-3,IEC 61347-1
Quality Standard	ISO 9001
Environmental Standard	ISO 14001
EMC Immunity Standard	EN 55015
Vibration Standard	IEC 60068-2-29 FB
Bumps Standard	Not specified
Approval Marks	CB Certificate CCC certificate TISI
	marking PSB certification RCM
	compliance SNI Certificate CS
	Compliance IRAM Compliance
Temperature Marking	Yes
Hum And Noise Level	< 30 dB(A)
Product Data	
Full product code	694793913355000
Order product name	EB-Ci 1-2 14-28W 220-240V 50/60 Hz
EAN/UPC - Product	6947939133550
Order code	913713043280
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	30
Material Nr. (12NC)	913713043280
Net Weight (Piece)	0.080 kg

#### Dimensional drawing

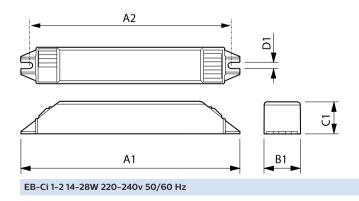

Product	A1	A2	B1	C1	D1
EB-Ci 1-2 14-28W 220-240V 50/60	210 mm	200 mm	30 mm	26 mm	4.3 mm
Hz					

#### EB-Certalume for TL5 lamps



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, November 17 - data subject to change