THEM-CLC Flux LED

multicomp PRO



Features:

- Long operating life
- Energy efficiency
- Low thermal resistance
- Compact design
- Instant light
- Fully dimmable
- No UV
- Superior ESD protection

Typical Applications:

- Reading lights
- Security light
- Portable light
- Ceiling light
- Orientation
- Architectural lighting
- Entertainment
- General lighting
- Garden
- Jewel display illumination

Absolute Maximum Ratings:

Parameter	1W	
DC Forward Current	350mA	
Peak Pulse Current	500mA	
LED Junction Temperature	110°C	
Operating Temperature	-30°C to +100°C	
Storage Temperature	-40°C to +120°C	
Soldering Temperature	Manual 260°C(max) 5 Seconds	
Reverse Voltage	Manual 260°C (max) 5 Seconds	

Flux Characteristics at 350mA, Junction Temperature, TJ=25°C

Colour	Minimum Luminous Flux(Im)	Typical Luminous Flux(Im)	Max. Luminous Flux(lm)	Beam Pattern
Amber	40	50	-	Lambertian

Notes:

Optical Characteristics at 350mA, Junction Temperature, T_J=25°C

Colour	Dominant Wavelength λd Peak Wavelength λp or Colour Temperature (CCT)		Viewing Angle Degree
	Min.	Max.	201/2
Amber	585 nm	595 nm	135

Notes:

- 1. CCT ±5% tester tolerance.
- 2. Wavelength is measured with an accuracy of ±0.5nm.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



^{1.} Luminous flux is measured with an accuracy of ±10%

THEM-CLC Flux LED




Electrical Characteristics at 350mA, Junction Temperature, TJ=25°C

Colour	Forward Voltage V _F (V)		e V _F (V)	Temperature Coefficient of V _F (mV/°C)	Thermal Resistance Junction to lead
	Min.	Тур.	Max.	ΔV _F /ΔΤj	(°C/W)
Amber	-	2.2	2.6	-2	12


Notes:

1. VF ±0.1V tester tolerance.

Colour spectrum, T_J = 25°C

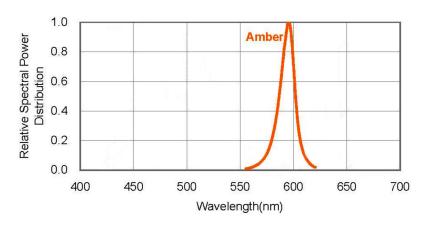


Radiation Diagram




Typical Spatial distribution for Amber

Forward Voltage & Forward Current



Typical Spatial distribution for Amber

Luminous Flux & Forward Current



Typical Spatial distribution for Amber


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro





THEM-CLC Flux LED

multicomp PRO

Drawing:

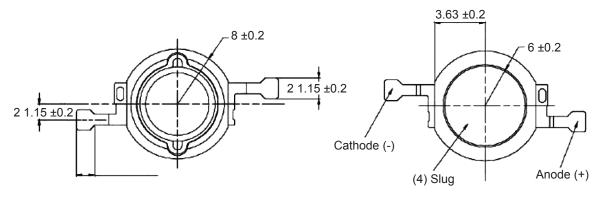





Dimensions : Millimetres Tolerance : ±0.2 mm

Notes:

The polarity of slug at bottom is anode.

It is important that the slug can't contact aluminium surface, it is strongly recommended that there should coat a uniform electrically isolated heat dissipation film on the surface.

It is strongly recommended that the temperature of lead be not higher than 70°C.

Part Number Table

Description	Part Number
THEM-CLC Flux Amber LED	THEM-CLAX(Amber)

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

