

Thick Film Chip Resistor 0603

multicomp PRO




Features

- Small size and light weight
- Suitable for both wave and reflow soldering
- Reduction of assembly costs

Performance Specification

Temperature Coefficient	: 1Ω to 10Ω ±400PPM/°C 11Ω to 100Ω ±200PPM/°C >100Ω ±100PPM/°C
Short Time Overload	: ±5% : ±(2% +0.1Ω)Max. ±1% : ±(1% +0.1Ω)Max.
Insulation Resistance	: Min. 1,000MΩ
Dielectric Withstanding Voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal Bending	: ±(1% +0.05Ω) Max.
Soldering Heat	: ±(1% +0.05Ω) Max.
Solderability	: Min. 95% coverage
Temperature Cycling	: ±5% : ±(1% +0.05Ω) Max. ±1% : ±(0.5% +0.05Ω) Max.
Humidity (Steady State)	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(0.5% +0.1Ω) Max.
Load Life in Humidity	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(1% +0.1Ω) Max.
Load Life	: ±5% : ±(3% +0.1Ω) Max. ±1% : ±(1% +0.1Ω) Max.


Derating Curve

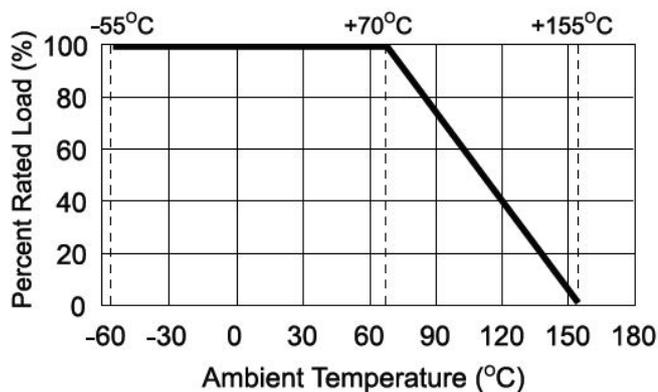

Thick Film Chip Resistor 0603

multicomp PRO

Dimension

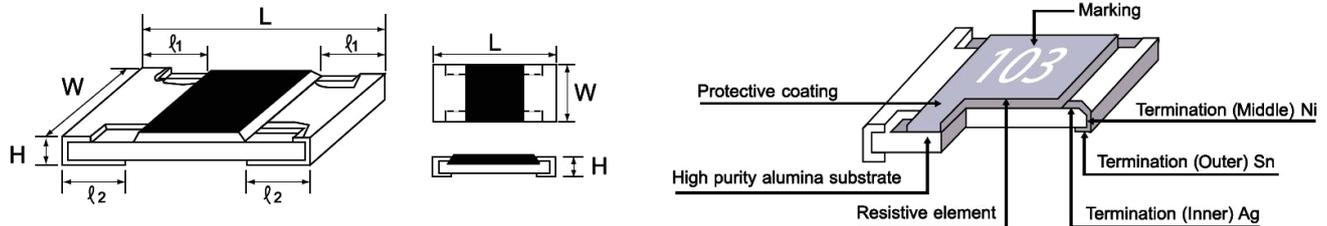

Type	Dimension (mm)				
	L	W	H	ℓ ₁	ℓ ₂
0603	1.6 ±0.1	0.8 ^{+0.15} / _{-0.1}	0.45 ±0.1	0.3 ±0.2	0.3 ±0.2

Type	Power Rating at 70°C	Max. Working Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Tolerance %	Resistance Range
0603	1/10W-S	1A	2A	-	Jumper	<50mΩ
		75V	150V	300V	±1% ±5%	1Ω to 10MΩ

Part Number Table

Description	Part Number	Description	Part Number
Resistor, Thick Film, 100R, 1%, 0.1W, 0603	MC0100W06031100R	Resistor, Thick Film, 12K, 1%, 0.1W, 0603	MC0100W0603112K
Resistor, Thick Film, 1K, 1%, 0.1W, 0603	MC0100W060311K	Resistor, Thick Film, 120K, 1%, 0.1W, 0603	MC0100W06031120K
Resistor, Thick Film, 10K, 1%, 0.1W, 0603	MC0100W0603110K	Resistor, Thick Film, 1M2, 1%, 0.1W, 0603	MC0100W060311M20
Resistor, Thick Film, 100K, 1%, 0.1W, 0603	MC0100W06031100K	Resistor, Thick Film, 12R, 1%, 0.1W, 0603	MC0100W0603112R
Resistor, Thick Film, 1M, 1%, 0.1W, 0603	MC0100W060311M	Resistor, Thick Film, 1R2, 1%, 0.1W, 0603	MC0100W060311R20
Resistor, Thick Film, 10M, 1%, 0.1W, 0603	MC0100W0603110M0	Resistor, Thick Film, 12K1, 1%, 0.1W, 0603	MC0100W0603112K1
Resistor, Thick Film, 10R, 1%, 0.1W, 0603	MC0100W0603110R	Resistor, Thick Film, 121K, 1%, 0.1W, 0603	MC0100W06031121K
Resistor, Thick Film, 1R, 1%, 0.1W, 0603	MC0100W060311R0	Resistor, Thick Film, 12K4, 1%, 0.1W, 0603	MC0100W0603112K4
Resistor, Thick Film, 10K5, 1%, 0.1W, 0603	MC0100W0603110K5	Resistor, Thick Film, 1K27, 1%, 0.1W, 0603	MC0100W060311K27
Resistor, Thick Film, 105K, 1%, 0.1W, 0603	MC0100W06031105K	Resistor, Thick Film, 12K7, 1%, 0.1W, 0603	MC0100W0603112K7
Resistor, Thick Film, 110R, 1%, 0.1W, 0603	MC0100W06031110R	Resistor, Thick Film, 127K, 1%, 0.1W, 0603	MC0100W06031127K
Resistor, Thick Film, 1K1, 1%, 0.1W, 0603	MC0100W060311K1	Resistor, Thick Film, 130R, 1%, 0.1W, 0603	MC0100W06031130R
Resistor, Thick Film, 11K, 1%, 0.1W, 0603	MC0100W0603111K	Resistor, Thick Film, 1K3, 1%, 0.1W, 0603	MC0100W060311K3
Resistor, Thick Film, 110K, 1%, 0.1W, 0603	MC0100W06031110K	Resistor, Thick Film, 13K, 1%, 0.1W, 0603	MC0100W0603113K
Resistor, Thick Film, 11R, 1%, 0.1W, 0603	MC0100W0603111R	Resistor, Thick Film, 130K, 1%, 0.1W, 0603	MC0100W06031130K
Resistor, Thick Film, 11K5, 1%, 0.1W, 0603	MC0100W0603111K5	Resistor, Thick Film, 13K3, 1%, 0.1W, 0603	MC0100W0603113K3
Resistor, Thick Film, 115K, 1%, 0.1W, 0603	MC0100W06031115K	Resistor, Thick Film, 140R, 1%, 0.1W, 0603	MC0100W06031140R
Resistor, Thick Film, 120R, 1%, 0.1W, 0603	MC0100W06031120R	Resistor, Thick Film, 1K4, 1%, 0.1W, 0603	MC0100W060311K4
Resistor, Thick Film, 1K2, 1%, 0.1W, 0603	MC0100W060311K2	Resistor, Thick Film, 14K, 1%, 0.1W, 0603	MC0100W0603114K

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

Thick Film Chip Resistor 0603

multicomp PRO

Description	Part Number	Description	Part Number
Resistor, Thick Film, 140K, 1%, 0.1W, 0603	MC0100W06031140K	Resistor, Thick Film, 220R, 1%, 0.1W, 0603	MC0100W06031220R
Resistor, Thick Film, 14K3, 1%, 0.1W, 0603	MC0100W0603114K3	Resistor, Thick Film, 2K2, 1%, 0.1W, 0603	MC0100W060312K2
Resistor, Thick Film, 1K47, 1%, 0.1W, 0603	MC0100W060311K47	Resistor, Thick Film, 22K, 1%, 0.1W, 0603	MC0100W0603122K
Resistor, Thick Film, 147K, 1%, 0.1W, 0603	MC0100W06031147K	Resistor, Thick Film, 220K, 1%, 0.1W, 0603	MC0100W06031220K
Resistor, Thick Film, 14R7, 1%, 0.1W, 0603	MC0100W0603114R7	Resistor, Thick Film, 2M2, 1%, 0.1W, 0603	MC0100W060312M20
Resistor, Thick Film, 150R, 1%, 0.1W, 0603	MC0100W06031150R	Resistor, Thick Film, 22R, 1%, 0.1W, 0603	MC0100W0603122R
Resistor, Thick Film, 1K5, 1%, 0.1W, 0603	MC0100W060311K5	Resistor, Thick Film, 2R2, 1%, 0.1W, 0603	MC0100W060312R2
Resistor, Thick Film, 15K, 1%, 0.1W, 0603	MC0100W0603115K	Resistor, Thick Film, 22K1, 1%, 0.1W, 0603	MC0100W0603122K1
Resistor, Thick Film, 150K, 1%, 0.1W, 0603	MC0100W06031150K	Resistor, Thick Film, 2K26, 1%, 0.1W, 0603	MC0100W060312K26
Resistor, Thick Film, 1M5, 1%, 0.1W, 0603	MC0100W060311M50	Resistor, Thick Film, 226K, 1%, 0.1W, 0603	MC0100W06031226K
Resistor, Thick Film, 15R, 1%, 0.1W, 0603	MC0100W0603115R	Resistor, Thick Film, 2K32, 1%, 0.1W, 0603	MC0100W060312K32
Resistor, Thick Film, 1R5, 1%, 0.1W, 0603	MC0100W060311R5	Resistor, Thick Film, 240R, 1%, 0.1W, 0603	MC0100W06031240R
Resistor, Thick Film, 160R, 1%, 0.1W, 0603	MC0100W06031160R	Resistor, Thick Film, 2K4, 1%, 0.1W, 0603	MC0100W060312K4
Resistor, Thick Film, 1K6, 1%, 0.1W, 0603	MC0100W060311K6	Resistor, Thick Film, 24K, 1%, 0.1W, 0603	MC0100W0603124K
Resistor, Thick Film, 16K, 1%, 0.1W, 0603	MC0100W0603116K	Resistor, Thick Film, 240K, 1%, 0.1W, 0603	MC0100W06031240K
Resistor, Thick Film, 160K, 1%, 0.1W, 0603	MC0100W06031160K	Resistor, Thick Film, 24R, 1%, 0.1W, 0603	MC0100W0603124R
Resistor, Thick Film, 16R, 1%, 0.1W, 0603	MC0100W0603116R	Resistor, Thick Film, 249R, 1%, 0.1W, 0603	MC0100W06031249R
Resistor, Thick Film, 16K2, 1%, 0.1W, 0603	MC0100W0603116K2	Resistor, Thick Film, 2K49, 1%, 0.1W, 0603	MC0100W060312K49
Resistor, Thick Film, 169R, 1%, 0.1W, 0603	MC0100W06031169R	Resistor, Thick Film, 24K9, 1%, 0.1W, 0603	MC0100W0603124K9
Resistor, Thick Film, 1K69, 1%, 0.1W, 0603	MC0100W060311K69	Resistor, Thick Film, 249K, 1%, 0.1W, 0603	MC0100W06031249K
Resistor, Thick Film, 169K, 1%, 0.1W, 0603	MC0100W06031169K	Resistor, Thick Film, 24R9, 1%, 0.1W, 0603	MC0100W0603124R9
Resistor, Thick Film, 17K8, 1%, 0.1W, 0603	MC0100W0603117K8	Resistor, Thick Film, 270R, 1%, 0.1W, 0603	MC0100W06031270R
Resistor, Thick Film, 178K, 1%, 0.1W, 0603	MC0100W06031178K	Resistor, Thick Film, 2K7, 1%, 0.1W, 0603	MC0100W060312K7
Resistor, Thick Film, 180R, 1%, 0.1W, 0603	MC0100W06031180R	Resistor, Thick Film, 27K, 1%, 0.1W, 0603	MC0100W0603127K
Resistor, Thick Film, 1K8, 1%, 0.1W, 0603	MC0100W060311K8	Resistor, Thick Film, 270K, 1%, 0.1W, 0603	MC0100W06031270K
Resistor, Thick Film, 18K, 1%, 0.1W, 0603	MC0100W0603118K	Resistor, Thick Film, 27R, 1%, 0.1W, 0603	MC0100W0603127R
Resistor, Thick Film, 180K, 1%, 0.1W, 0603	MC0100W06031180K	Resistor, Thick Film, 27K4, 1%, 0.1W, 0603	MC0100W0603127K4
Resistor, Thick Film, 1M8, 1%, 0.1W, 0603	MC0100W060311M80	Resistor, Thick Film, 274K, 1%, 0.1W, 0603	MC0100W06031274K
Resistor, Thick Film, 18R, 1%, 0.1W, 0603	MC0100W0603118R	Resistor, Thick Film, 2K8, 1%, 0.1W, 0603	MC0100W060312K8
Resistor, Thick Film, 1R8, 1%, 0.1W, 0603	MC0100W060311R80	Resistor, Thick Film, 2K87, 1%, 0.1W, 0603	MC0100W060312K87
Resistor, Thick Film, 18K2, 1%, 0.1W, 0603	MC0100W0603118K2	Resistor, Thick Film, 28K7, 1%, 0.1W, 0603	MC0100W0603128K7
Resistor, Thick Film, 1K87, 1%, 0.1W, 0603	MC0100W060311K87	Resistor, Thick Film, 287K, 1%, 0.1W, 0603	MC0100W06031287K
Resistor, Thick Film, 191K, 1%, 0.1W, 0603	MC0100W06031191K	Resistor, Thick Film, 300R, 1%, 0.1W, 0603	MC0100W06031300R
Resistor, Thick Film, 200R, 1%, 0.1W, 0603	MC0100W06031200R	Resistor, Thick Film, 3K, 1%, 0.1W, 0603	MC0100W060313K
Resistor, Thick Film, 2K, 1%, 0.1W, 0603	MC0100W060312K	Resistor, Thick Film, 30K, 1%, 0.1W, 0603	MC0100W0603130K
Resistor, Thick Film, 20K, 1%, 0.1W, 0603	MC0100W0603120K	Resistor, Thick Film, 300K, 1%, 0.1W, 0603	MC0100W06031300K
Resistor, Thick Film, 200K, 1%, 0.1W, 0603	MC0100W06031200K	Resistor, Thick Film, 3M, 1%, 0.1W, 0603	MC0100W060313M00
Resistor, Thick Film, 2M, 1%, 0.1W, 0603	MC0100W060312M00	Resistor, Thick Film, 30R, 1%, 0.1W, 0603	MC0100W0603130R
Resistor, Thick Film, 20R, 1%, 0.1W, 0603	MC0100W0603120R	Resistor, Thick Film, 30K1, 1%, 0.1W, 0603	MC0100W0603130K1
Resistor, Thick Film, 21K, 1%, 0.1W, 0603	MC0100W0603121K	Resistor, Thick Film, 3K16, 1%, 0.1W, 0603	MC0100W060313K16
Resistor, Thick Film, 215K, 1%, 0.1W, 0603	MC0100W06031215K	Resistor, Thick Film, 31K6, 1%, 0.1W, 0603	MC0100W0603131K6

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

Thick Film Chip Resistor 0603

multicomp PRO

Description	Part Number	Description	Part Number
Resistor, Thick Film, 316K, 1%, 0.1W, 0603	MC0100W06031316K	Resistor, Thick Film, 470K, 1%, 0.1W, 0603	MC0100W06031470K
Resistor, Thick Film, 330R, 1%, 0.1W, 0603	MC0100W06031330R	Resistor, Thick Film, 4M7, 1%, 0.1W, 0603	MC0100W060314M70
Resistor, Thick Film, 3K3, 1%, 0.1W, 0603	MC0100W060313K3	Resistor, Thick Film, 47R, 1%, 0.1W, 0603	MC0100W0603147R
Resistor, Thick Film, 33K, 1%, 0.1W, 0603	MC0100W0603133K	Resistor, Thick Film, 4R7, 1%, 0.1W, 0603	MC0100W060314R7
Resistor, Thick Film, 330K, 1%, 0.1W, 0603	MC0100W06031330K	Resistor, Thick Film, 4K75, 1%, 0.1W, 0603	MC0100W060314K75
Resistor, Thick Film, 3M3, 1%, 0.1W, 0603	MC0100W060313M30	Resistor, Thick Film, 4K87, 1%, 0.1W, 0603	MC0100W060314K87
Resistor, Thick Film, 33R, 1%, 0.1W, 0603	MC0100W0603133R	Resistor, Thick Film, 499R, 1%, 0.1W, 0603	MC0100W06031499R
Resistor, Thick Film, 3R3, 1%, 0.1W, 0603	MC0100W060313R3	Resistor, Thick Film, 4K99, 1%, 0.1W, 0603	MC0100W060314K99
Resistor, Thick Film, 3K32, 1%, 0.1W, 0603	MC0100W060313K32	Resistor, Thick Film, 49K9, 1%, 0.1W, 0603	MC0100W0603149K9
Resistor, Thick Film, 33K2, 1%, 0.1W, 0603	MC0100W0603133K2	Resistor, Thick Film, 499K, 1%, 0.1W, 0603	MC0100W06031499K
Resistor, Thick Film, 34K8, 1%, 0.1W, 0603	MC0100W0603134K8	Resistor, Thick Film, 49R9, 1%, 0.1W, 0603	MC0100W0603149R9
Resistor, Thick Film, 34R8, 1%, 0.1W, 0603	MC0100W0603134R8	Resistor, Thick Film, 510R, 1%, 0.1W, 0603	MC0100W06031510R
Resistor, Thick Film, 360R, 1%, 0.1W, 0603	MC0100W06031360R	Resistor, Thick Film, 5K1, 1%, 0.1W, 0603	MC0100W060315K1
Resistor, Thick Film, 3K6, 1%, 0.1W, 0603	MC0100W060313K6	Resistor, Thick Film, 51K, 1%, 0.1W, 0603	MC0100W0603151K
Resistor, Thick Film, 36K, 1%, 0.1W, 0603	MC0100W0603136K	Resistor, Thick Film, 510K, 1%, 0.1W, 0603	MC0100W06031510K
Resistor, Thick Film, 360K, 1%, 0.1W, 0603	MC0100W06031360K	Resistor, Thick Film, 51R, 1%, 0.1W, 0603	MC0100W0603151R
Resistor, Thick Film, 36R, 1%, 0.1W, 0603	MC0100W0603136R	Resistor, Thick Film, 5R1, 1%, 0.1W, 0603	MC0100W060315R10
Resistor, Thick Film, 3K65, 1%, 0.1W, 0603	MC0100W060313K65	Resistor, Thick Film, 52K3, 1%, 0.1W, 0603	MC0100W0603152K3
Resistor, Thick Film, 3R65, 1%, 0.1W, 0603	MC0100W060313R65	Resistor, Thick Film, 560R, 1%, 0.1W, 0603	MC0100W06031560R
Resistor, Thick Film, 390R, 1%, 0.1W, 0603	MC0100W06031390R	Resistor, Thick Film, 5K6, 1%, 0.1W, 0603	MC0100W060315K6
Resistor, Thick Film, 3K9, 1%, 0.1W, 0603	MC0100W060313K9	Resistor, Thick Film, 56K, 1%, 0.1W, 0603	MC0100W0603156K
Resistor, Thick Film, 39K, 1%, 0.1W, 0603	MC0100W0603139K	Resistor, Thick Film, 560K, 1%, 0.1W, 0603	MC0100W06031560K
Resistor, Thick Film, 390K, 1%, 0.1W, 0603	MC0100W06031390K	Resistor, Thick Film, 56R, 1%, 0.1W, 0603	MC0100W0603156R
Resistor, Thick Film, 3M9, 1%, 0.1W, 0603	MC0100W060313M90	Resistor, Thick Film, 56K2, 1%, 0.1W, 0603	MC0100W0603156K2
Resistor, Thick Film, 39R, 1%, 0.1W, 0603	MC0100W0603139R	Resistor, Thick Film, 59K, 1%, 0.1W, 0603	MC0100W0603159K
Resistor, Thick Film, 4K02, 1%, 0.1W, 0603	MC0100W060314K02	Resistor, Thick Film, 6K04, 1%, 0.1W, 0603	MC0100W060316K04
Resistor, Thick Film, 40K2, 1%, 0.1W, 0603	MC0100W0603140K2	Resistor, Thick Film, 6K19, 1%, 0.1W, 0603	MC0100W060316K19
Resistor, Thick Film, 402K, 1%, 0.1W, 0603	MC0100W06031402K	Resistor, Thick Film, 61K9, 1%, 0.1W, 0603	MC0100W0603161K9
Resistor, Thick Film, 40R2, 1%, 0.1W, 0603	MC0100W0603140R2	Resistor, Thick Film, 620R, 1%, 0.1W, 0603	MC0100W06031620R
Resistor, Thick Film, 41K2, 1%, 0.1W, 0603	MC0100W0603141K2	Resistor, Thick Film, 6K2, 1%, 0.1W, 0603	MC0100W060316K2
Resistor, Thick Film, 422R, 1%, 0.1W, 0603	MC0100W06031422R	Resistor, Thick Film, 62K, 1%, 0.1W, 0603	MC0100W0603162K
Resistor, Thick Film, 42R2, 1%, 0.1W, 0603	MC0100W0603142R2	Resistor, Thick Film, 620K, 1%, 0.1W, 0603	MC0100W06031620K
Resistor, Thick Film, 430R, 1%, 0.1W, 0603	MC0100W06031430R	Resistor, Thick Film, 62R, 1%, 0.1W, 0603	MC0100W0603162R
Resistor, Thick Film, 4K3, 1%, 0.1W, 0603	MC0100W060314K3	Resistor, Thick Film, 6R2, 1%, 0.1W, 0603	MC0100W060316R20
Resistor, Thick Film, 43K, 1%, 0.1W, 0603	MC0100W0603143K	Resistor, Thick Film, 63K4, 1%, 0.1W, 0603	MC0100W0603163K4
Resistor, Thick Film, 43R, 1%, 0.1W, 0603	MC0100W0603143R	Resistor, Thick Film, 6K49, 1%, 0.1W, 0603	MC0100W060316K49
Resistor, Thick Film, 44K2, 1%, 0.1W, 0603	MC0100W0603144K2	Resistor, Thick Film, 64K9, 1%, 0.1W, 0603	MC0100W0603164K9
Resistor, Thick Film, 46K4, 1%, 0.1W, 0603	MC0100W0603146K4	Resistor, Thick Film, 680R, 1%, 0.1W, 0603	MC0100W06031680R
Resistor, Thick Film, 470R, 1%, 0.1W, 0603	MC0100W06031470R	Resistor, Thick Film, 6K8, 1%, 0.1W, 0603	MC0100W060316K8
Resistor, Thick Film, 4K7, 1%, 0.1W, 0603	MC0100W060314K7	Resistor, Thick Film, 68K, 1%, 0.1W, 0603	MC0100W0603168K
Resistor, Thick Film, 47K, 1%, 0.1W, 0603	MC0100W0603147K	Resistor, Thick Film, 680K, 1%, 0.1W, 0603	MC0100W06031680K

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

Thick Film Chip Resistor 0603

multicomp PRO

Description	Part Number	Description	Part Number
Resistor, Thick Film, 68R, 1%, 0.1W, 0603	MC0100W0603168R	Resistor, Thick Film, 90K9, 1%, 0.1W, 0603	MC0100W0603190K9
Resistor, Thick Film, 6R8, 1%, 0.1W, 0603	MC0100W060316R8	Resistor, Thick Film, 910R, 1%, 0.1W, 0603	MC0100W06031910R
Resistor, Thick Film, 68K1, 1%, 0.1W, 0603	MC0100W0603168K1	Resistor, Thick Film, 9K1, 1%, 0.1W, 0603	MC0100W060319K1
Resistor, Thick Film, 69K8, 1%, 0.1W, 0603	MC0100W0603169K8	Resistor, Thick Film, 91K, 1%, 0.1W, 0603	MC0100W0603191K
Resistor, Thick Film, 715R, 1%, 0.1W, 0603	MC0100W06031715R	Resistor, Thick Film, 910K, 1%, 0.1W, 0603	MC0100W06031910K
Resistor, Thick Film, 71K5, 1%, 0.1W, 0603	MC0100W0603171K5	Resistor, Thick Film, 91R, 1%, 0.1W, 0603	MC0100W0603191R
Resistor, Thick Film, 750R, 1%, 0.1W, 0603	MC0100W06031750R	Resistor, Thick Film, 9K53, 1%, 0.1W, 0603	MC0100W060319K53
Resistor, Thick Film, 7K5, 1%, 0.1W, 0603	MC0100W060317K5	Resistor, Thick Film, 0R, 0.1W, 0603	MC0100W06030R
Resistor, Thick Film, 75K, 1%, 0.1W, 0603	MC0100W0603175K	Resistor, Thick Film, 10R, 5%, 0.1W, 0603	MC0100W0603510R
Resistor, Thick Film, 75R, 1%, 0.1W, 0603	MC0100W0603175R	Resistor, Thick Film, 100R, 5%, 0.1W, 0603	MC0100W06035100R
Resistor, Thick Film, 7K87, 1%, 0.1W, 0603	MC0100W060317K87	Resistor, Thick Film, 1K, 5%, 0.1W, 0603	MC0100W060351K
Resistor, Thick Film, 78K7, 1%, 0.1W, 0603	MC0100W0603178K7	Resistor, Thick Film, 10K, 5%, 0.1W, 0603	MC0100W0603510K
Resistor, Thick Film, 8K06, 1%, 0.1W, 0603	MC0100W060318K06	Resistor, Thick Film, 100K, 5%, 0.1W, 0603	MC0100W06035100K
Resistor, Thick Film, 820R, 1%, 0.1W, 0603	MC0100W06031820R	Resistor, Thick Film, 1K5, 5%, 0.1W, 0603	MC0100W060351K5
Resistor, Thick Film, 8K2, 1%, 0.1W, 0603	MC0100W060318K2	Resistor, Thick Film, 22R, 5%, 0.1W, 0603	MC0100W0603522R
Resistor, Thick Film, 82K, 1%, 0.1W, 0603	MC0100W0603182K	Resistor, Thick Film, 2K2, 5%, 0.1W, 0603	MC0100W060352K2
Resistor, Thick Film, 820K, 1%, 0.1W, 0603	MC0100W06031820K	Resistor, Thick Film, 2K7, 5%, 0.1W, 0603	MC0100W060352K7
Resistor, Thick Film, 82R, 1%, 0.1W, 0603	MC0100W0603182R	Resistor, Thick Film, 33R, 5%, 0.1W, 0603	MC0100W0603533R
Resistor, Thick Film, 8R2, 1%, 0.1W, 0603	MC0100W060318R20	Resistor, Thick Film, 330R, 5%, 0.1W, 0603	MC0100W06035330R
Resistor, Thick Film, 82K5, 1%, 0.1W, 0603	MC0100W0603182K5	Resistor, Thick Film, 47R, 5%, 0.1W, 0603	MC0100W0603547R
Resistor, Thick Film, 866R, 1%, 0.1W, 0603	MC0100W06031866R	Resistor, Thick Film, 470R, 5%, 0.1W, 0603	MC0100W06035470R
Resistor, Thick Film, 86K6, 1%, 0.1W, 0603	MC0100W0603186K6	Resistor, Thick Film, 4K7, 5%, 0.1W, 0603	MC0100W060354K7
Resistor, Thick Film, 909R, 1%, 0.1W, 0603	MC0100W06031909R	Resistor, Thick Film, 47K, 5%, 0.1W, 0603	MC0100W0603547K

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO