

# Standard MOV Varistor

## Square, 25mm

**multicomp** PRO

**RoHS  
Compliant**



### Description

Metal Oxide Varistor (MOV) as one nonlinear resistance element is mainly made of zinc oxide (ZnO), which has very high surge capacity and big nonlinear coefficient. Below the threshold voltage, its resistance is very high, nearly no current flows through, but above the threshold voltage, the resistance reduces sharply, huge current can be discharged. Due to this characteristic, varistor as a protection component in electronic and electrical equipment can absorb abnormal over-voltage and lightning surge.

varistor is with High Surge Current Density, Low Clamping Voltage, and Good Surge Capacity. It can also be customized as required.


### Applications

- Power Supplies
- Home Electrical Appliances
- Industrial Devices
- Surge Protectors
- Telecom Devices


### Features

- Epoxy Resin Coating
- Silicone Resin Coating
- Low Leakage Current
- Bidirectional and Symmetrical V/I Characteristics
- Operating Temperature Range  
Low Temperature: -40°C  
High Temperature: +85°C / +105°C

### Product Structure

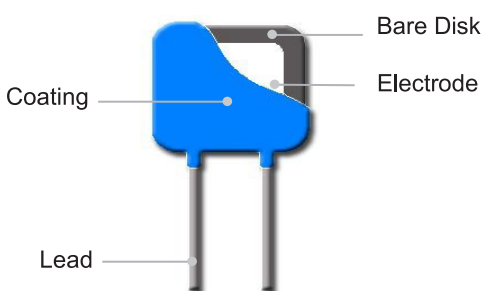


### Lead Types

| Lead Types                                                                           |                      | Codes |
|--------------------------------------------------------------------------------------|----------------------|-------|
|  | Little Straight Lead | I     |

# Standard MOV Varistor Square, 25mm

**multicomp** PRO

## Temp. Derating Curve

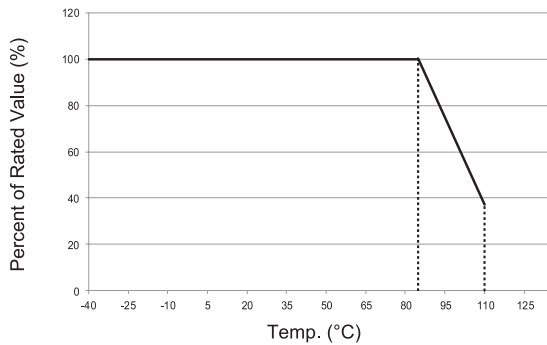

For Normal Temp. Series

Note:

When ambient Temp. exceeds 85°C, the peak surge current and energy rating should be reduced as shown in the left curve.

## General Technical Data

| Item                  | Value       | Unit |
|-----------------------|-------------|------|
| Operating Temperature | -40 to +85  | °C   |
| Storage Temperature   | -40 to +125 | °C   |
| Voltage Proof         | ≥2500       | Vac  |
| Insulation Resistance | ≥100        | MΩ   |

| Item                     | Description                                                                                                                                                                                                                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>V<sub>N</sub></b>     | <b>Nominal Varistor Voltage</b><br>Voltage, at specified D.C. current used as a reference point in the component characteristics.                                                                                                    |
| <b>I<sub>L</sub></b>     | <b>Leakage Current</b><br>Measuring at 75% of varistor voltage.                                                                                                                                                                      |
| <b>UCT</b>               | <b>Upper Category Temp.</b><br>Max. ambient temp. for which a varistor has been designed to operate continuously.                                                                                                                    |
| <b>UCT</b>               | <b>Lower Category Temp.</b><br>Minimum ambient temp. at which a varistor has been designed to operate continuously.                                                                                                                  |
| <b>Max. Peak Current</b> | <b>Max. Peak Current</b><br>Max. current per pulse, which may be passed by a varistor at an ambient temp. of 25 °C, for a given number of pulses.                                                                                    |
| <b>V<sub>c</sub></b>     | <b>Clamping Voltage</b><br>Peak voltage developed across the varistor terminations under standard atmospheric conditions, when passing an 8/20 μs class current pulse.                                                               |
| <b>Voltage Proof</b>     | <b>Voltage Proof</b><br>Max. peak voltage, which may be applied under continuous operating conditions between the varistor terminations and any conducting mounting surface (Applicable only to insulated varistors).                |
| <b>C<sub>v</sub></b>     | <b>Capacitance</b><br>Capacitance across the MOV measured at a specified frequency and voltage.                                                                                                                                      |
| <b>V<sub>ac</sub></b>    | <b>Max. Continuous a.c. Voltage</b><br>Max. a.c. r.m.s. voltage of a substantially sinusoidal waveform (less than 5% total harmonic distortion) which can be applied to the component under continuous operating conditions at 25°C. |
| <b>V<sub>dc</sub></b>    | <b>Max. Continuous d.c. Voltage</b><br>Max. d.c. voltage (with less than 5% ripple) which can be applied to the component under continuous operating conditions at an ambient temp. of 25°C.                                         |

**multicomp** PRO

# Standard MOV Varistor

## Square, 25mm


**multicomp** PRO

### Dimensions

| Model        | L     | W (Max.) | W1      | W2      | H (Max.) | H1      | T (Max.) | T1        | d         | F       | F1        |
|--------------|-------|----------|---------|---------|----------|---------|----------|-----------|-----------|---------|-----------|
| MPV25S820KNK | 12 ±3 | 28       | 4 ±0.05 | 2 ±0.05 | 30       | 2 ±0.05 | 4.1      | 0.5 ±0.05 | 2.5 ±0.05 | 18 ±0.6 | 0.9 - 2.3 |
| MPV25S241KNK |       |          |         |         |          |         | 4.6      |           |           |         | 1.4 - 2.9 |
| MPV25S271KNK |       |          |         |         |          |         | 4.8      |           |           |         | 1.5 - 3.1 |
| MPV25S391KNK |       |          |         |         |          |         | 5.6      |           |           |         | 1.9 - 3.8 |
| MPV25S431KNK |       |          |         |         |          |         | 5.8      |           |           |         | 2 - 4     |
| MPV25S471KNK |       |          |         |         |          |         | 6.1      |           |           |         | 2.3 - 4.3 |
| MPV25S511KNK |       |          |         |         |          |         | 6.3      |           |           |         | 2.5 - 4.5 |
| MPV25S621KNK |       |          |         |         |          |         | 7        |           |           |         | 3.1 - 5.1 |
| MPV25S681KNK |       |          |         |         |          |         | 7.4      |           |           |         | 3.5 - 5.5 |

### Dimensions

| Model        | L     | W (Max.) | H (Max.) | T (Max.) | d         | F       | F1        |
|--------------|-------|----------|----------|----------|-----------|---------|-----------|
| MPV25S820KNK | 16 ±3 | 28       | 30       | 6.5      | 1.2 ±0.05 | 18 ±0.6 | 2 - 4     |
| MPV25S241KNK |       |          |          | 7        |           |         | 2.6 - 4.6 |
| MPV25S271KNK |       |          |          | 7.2      |           |         | 2.8 - 4.8 |
| MPV25S391KNK |       |          |          | 8        |           |         | 3.5 - 5.5 |
| MPV25S431KNK |       |          |          | 8.2      |           |         | 3.7 - 5.7 |
| MPV25S471KNK |       |          |          | 8.5      |           |         | 4 - 6     |
| MPV25S511KNK |       |          |          | 8.7      |           |         | 4.2 - 6.2 |
| MPV25S621KNK |       |          |          | 9.4      |           |         | 4.8 - 6.8 |
| MPV25S681KNK |       |          |          | 9.8      |           |         | 5.2 - 7.2 |

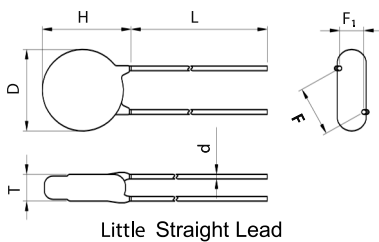

Dimensions : Millimetres

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 sg.element14.com/b/multicomp-pro

**multicomp** PRO

# Standard MOV Varistor

## Square, 25mm


**multicomp** PRO

### Specification

| Model        | Max. Continuous Operating Voltage |     | Varistor Voltage @1 mA DC |      | Clamping Voltage (Max.) |     | Max. Discharge Current (8/20 $\mu$ s) |                  | Max. Energy (10/1000 $\mu$ s) | Typical Capacitance (For reference only) @1 kHz |
|--------------|-----------------------------------|-----|---------------------------|------|-------------------------|-----|---------------------------------------|------------------|-------------------------------|-------------------------------------------------|
|              | Vac                               | Vdc | Min.                      | Max. | Vc                      | Ip  | In                                    | I <sub>max</sub> | (J)                           | (pF)                                            |
|              | (V)                               | (V) | (V)                       | (V)  | (V)                     | (V) | (kA)                                  |                  |                               |                                                 |
| MPV25S820KNK | 50                                | 65  | 74                        | 90   | 135                     | 175 | 10                                    | 25               | 98                            | 8800                                            |
| MPV25S241KNK | 150                               | 200 | 216                       | 264  | 395                     |     |                                       |                  | 302                           | 2800                                            |
| MPV25S271KNK | 175                               | 225 | 243                       | 297  | 455                     |     |                                       |                  | 340                           | 2450                                            |
| MPV25S391KNK | 250                               | 320 | 351                       | 429  | 650                     |     |                                       |                  | 520                           | 1700                                            |
| MPV25S431KNK | 275                               | 350 | 387                       | 473  | 710                     |     |                                       |                  | 575                           | 1600                                            |
| MPV25S471KNK | 300                               | 385 | 423                       | 517  | 775                     |     |                                       |                  | 630                           | 1450                                            |
| MPV25S511KNK | 320                               | 415 | 459                       | 561  | 845                     |     |                                       |                  | 665                           | 1300                                            |
| MPV25S621KNK | 385                               | 505 | 558                       | 682  | 1025                    |     |                                       |                  | 790                           | 1100                                            |
| MPV25S681KNK | 420                               | 560 | 612                       | 748  | 1120                    |     |                                       |                  | 790                           | 1000                                            |

### Performance Curve

Max. Peak Current Derating Curves

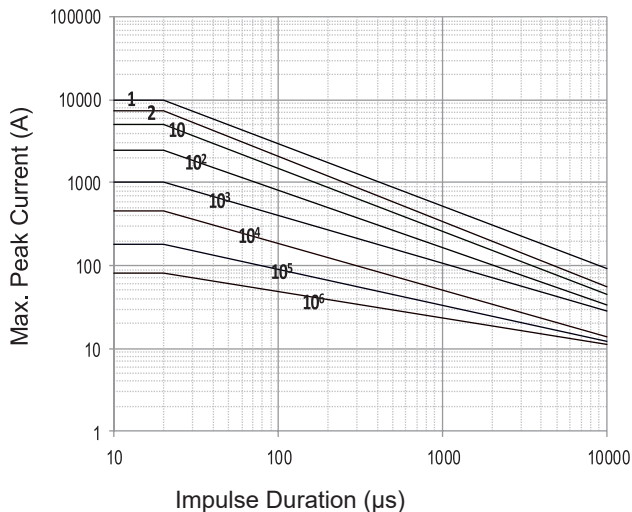



Note: 1, 2, 10, 10<sup>2</sup>, 10<sup>3</sup>, 10<sup>4</sup>, 10<sup>5</sup>, 10<sup>6</sup> Stand for Repetitions.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 sg.element14.com/b/multicomp-pro

**multicomp** PRO

# Standard MOV Varistor Square, 25mm

## Voltage-Current Characteristic Curves

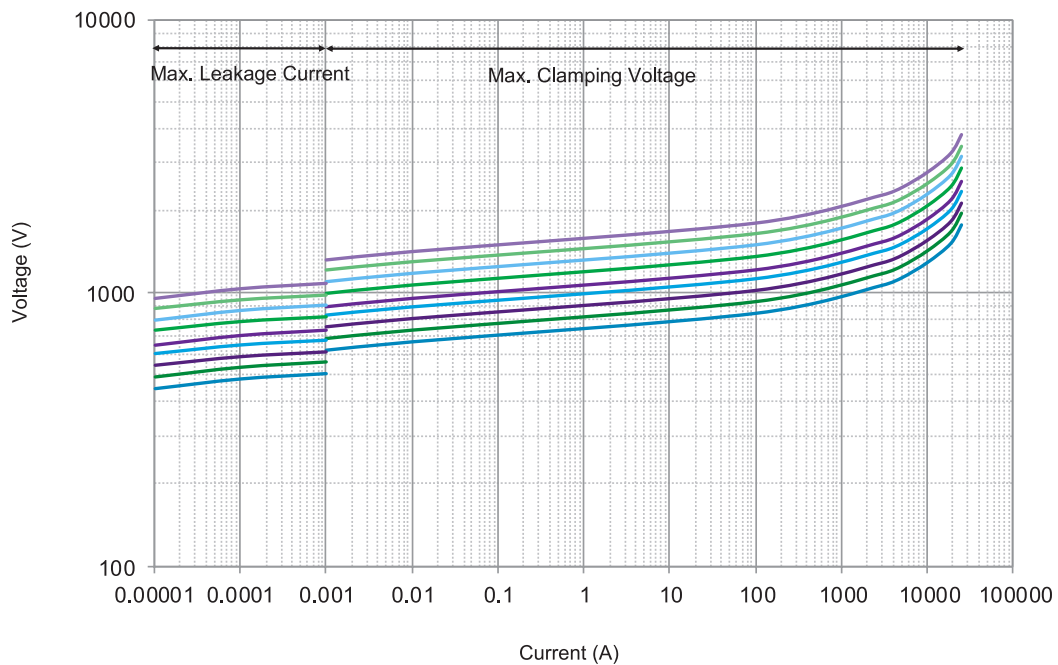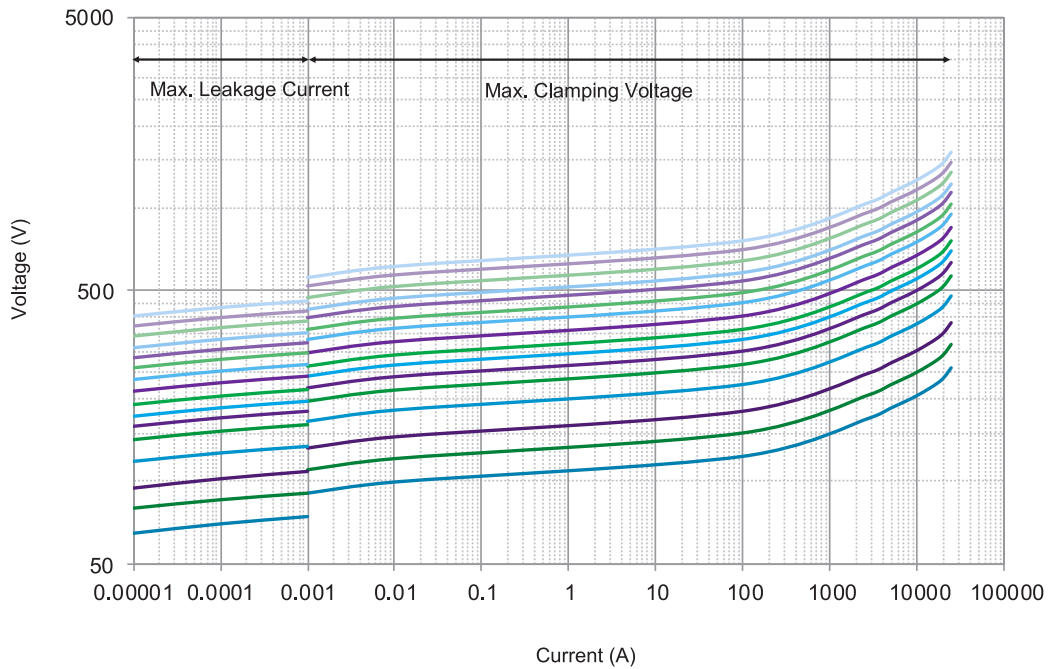

# Standard MOV Varistor

## Square, 25mm

**multicomp** PRO

### Part Number Table

| Description    | Part Number  |
|----------------|--------------|
| Varistor, 820V | MPV25S820KNK |
| Varistor, 240V | MPV25S241KNK |
| Varistor, 270V | MPV25S271KNK |
| Varistor, 390V | MPV25S391KNK |
| Varistor, 430V | MPV25S431KNK |
| Varistor, 470V | MPV25S471KNK |
| Varistor, 510V | MPV25S511KNK |
| Varistor, 620V | MPV25S621KNK |
| Varistor, 680V | MPV25S681KNK |

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
sg.element14.com/b/multicomp-pro

**multicomp** PRO