



# Product Environmental Profile

AvatarOn C 13A 250V2G w\_ SW Soc WE

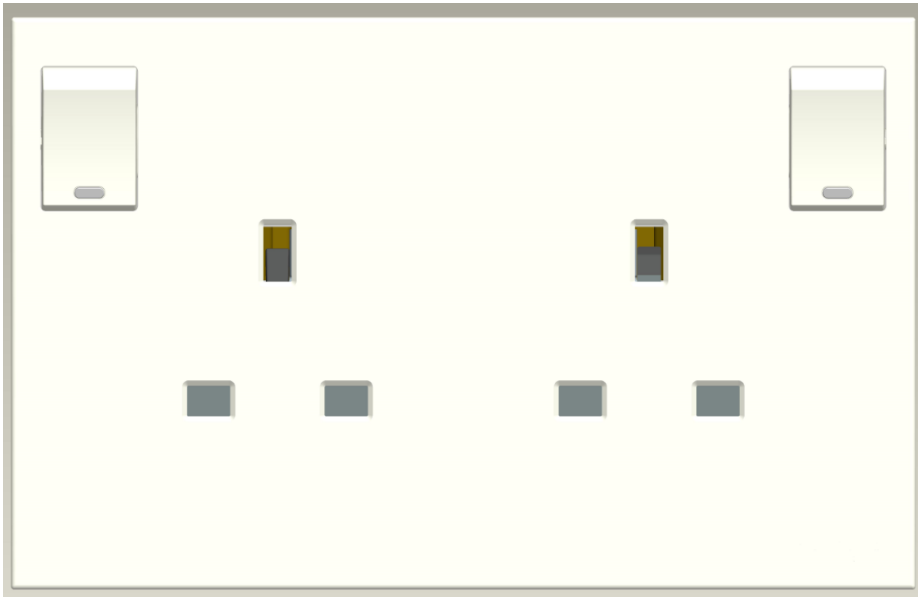

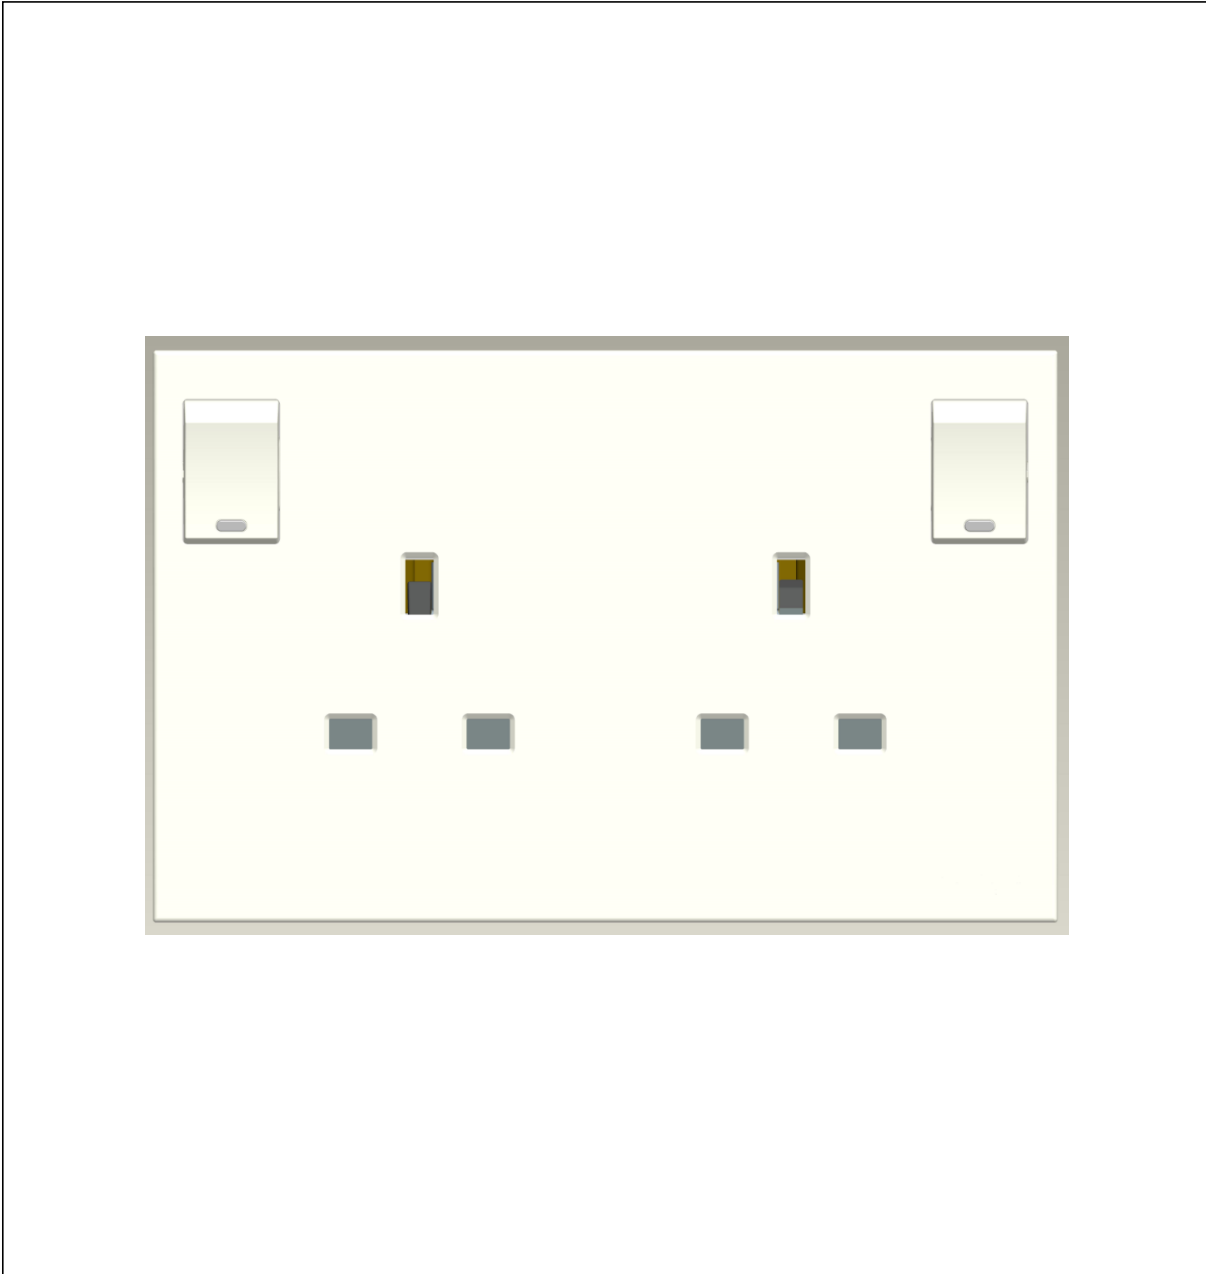


## General information

Reference product	AvatarOn C 13A 250V2G w_ SW Soc WE - E87T25_WE_G11
Description of the product	The main function of the socket outlet is to allow users to connect and disconnect the plug of an electrical load or the source of a signal from a network.
Functional unit	Connect/Disconnect during 20 years the plug of a load consuming 13A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP 20, in accordance with BS 1363 /SS 145 /MS 589.



## Constituent materials

Reference product mass	160 g	including the product, its packaging and additional elements and accessories
------------------------	-------	--

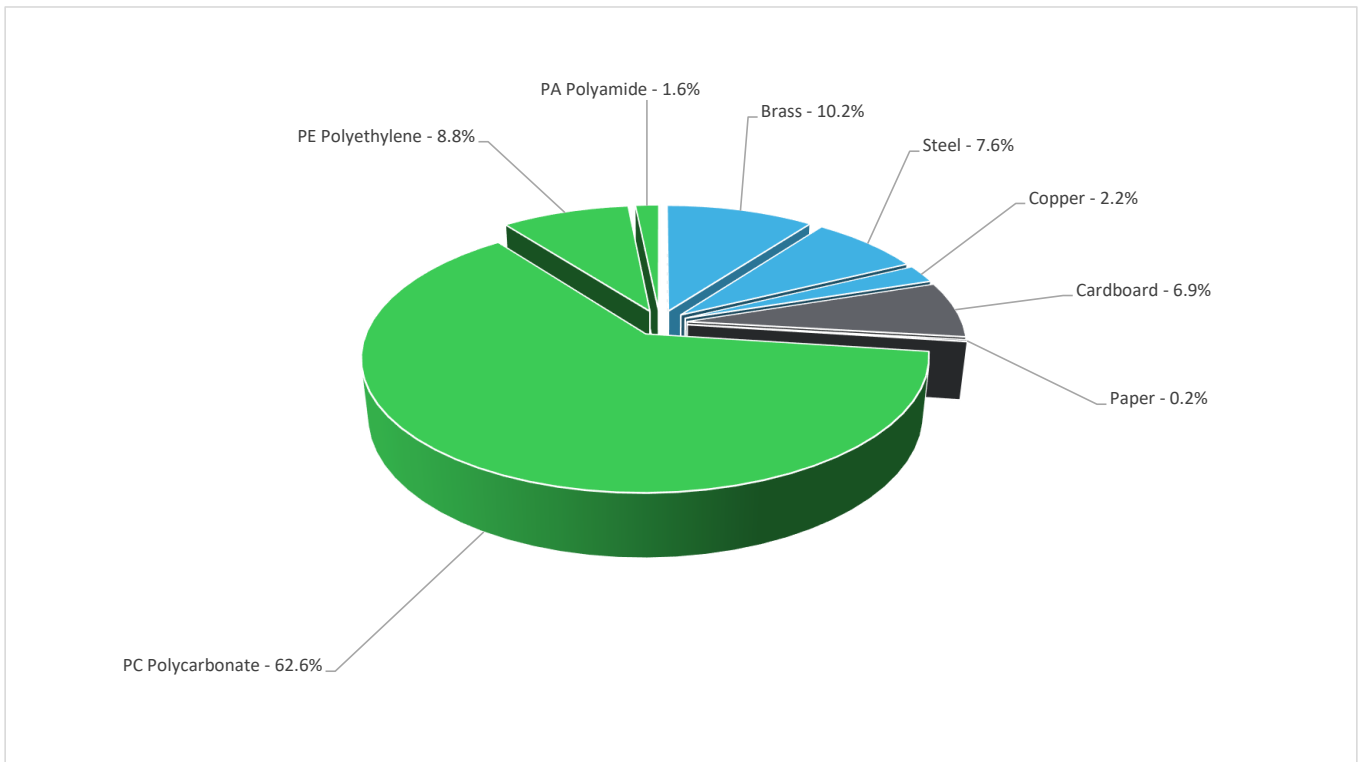

Plastics	73.00%
Metals	20.00%
Others	7.00%



## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



## Additional environmental information

End Of Life	Recyclability potential:	23%	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--



## Environmental impacts

Reference service life time	20 years		
Product category	Power socket		
Installation elements	The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal).		
Use scenario	Load rate: 50 % of In Use rate: 50% of the RLT		
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.		
Geographical representativeness	Malaysia		
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; APAC	Electricity Mix; Production mix; Low voltage; APAC
			[C1 - C4]
			Electricity Mix; Production mix; Low voltage; APAC

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			AvatarOn C 13A 250V2G w_ SW Soc WE - E87T25_WE_G11					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1.12E+01	1.08E+00	4.61E-02	2.51E-02	9.60E+00	4.40E-01	-2.31E-01
Contribution to climate change-fossil	kg CO2 eq	1.12E+01	1.07E+00	4.61E-02	2.40E-02	9.59E+00	4.39E-01	-2.29E-01
Contribution to climate change-biogenic	kg CO2 eq	1.14E-02	5.97E-03	0*	1.06E-03	3.68E-03	7.33E-04	-1.76E-03
Contribution to climate change-land use and land use change	kg CO2 eq	9.30E-08	1.23E-10	0*	8.06E-08	0*	1.22E-08	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.61E-07	6.71E-08	4.07E-08	2.01E-09	4.93E-08	1.62E-09	-5.17E-08
Contribution to acidification	mol H+ eq	7.50E-02	8.12E-03	2.00E-04	1.04E-04	6.61E-02	4.82E-04	-1.98E-03
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	3.40E-05	4.76E-06	5.40E-09	5.35E-07	2.62E-06	2.61E-05	-7.54E-07
Contribution to eutrophication marine	kg N eq	8.33E-03	9.10E-04	9.21E-05	2.81E-05	7.21E-03	9.29E-05	-1.36E-04
Contribution to eutrophication, terrestrial	mol N eq	9.52E-02	9.78E-03	9.98E-04	2.30E-04	8.31E-02	1.13E-03	-1.56E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	2.82E-02	3.45E-03	3.27E-04	6.30E-05	2.40E-02	3.27E-04	-6.16E-04
Contribution to resource use, minerals and metals	kg Sb eq	4.53E-05	4.44E-05	0*	7.78E-09	1.53E-07	7.36E-07	-5.50E-05
Contribution to resource use, fossils	MJ	1.85E+02	2.09E+01	5.60E-01	2.34E-01	1.57E+02	6.32E+00	-4.37E+00
Contribution to water use	m3 eq	6.59E-01	1.52E-01	2.34E-03	3.06E-02	3.93E-01	8.08E-02	-1.36E-01

Additional indicators for the French regulation are available as well

Inventory flows Indicators			AvatarOn C 13A 250V2G w_ SW Soc WE - E87T25_WE_G11					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.59E+01	2.23E-01	0*	3.32E-02	1.56E+01	1.94E-02	-4.64E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	2.33E-01	2.33E-01	0*	0*	0*	0*	-7.78E-03
Contribution to total use of renewable primary energy resources	MJ	1.61E+01	4.55E-01	0*	3.32E-02	1.56E+01	1.94E-02	-5.42E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.81E+02	1.72E+01	5.60E-01	2.34E-01	1.57E+02	6.32E+00	-4.20E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	3.70E+00	3.70E+00	0*	0*	0*	0*	-1.76E-01
Contribution to total use of non-renewable primary energy resources	MJ	1.85E+02	2.09E+01	5.60E-01	2.34E-01	1.57E+02	6.32E+00	-4.37E+00
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.53E-02	3.55E-03	5.45E-05	7.12E-04	9.15E-03	1.88E-03	-3.16E-03
Contribution to hazardous waste disposed	kg	3.76E+00	3.37E+00	0*	0*	2.56E-01	1.40E-01	-4.32E+00
Contribution to non hazardous waste disposed	kg	2.74E+00	9.79E-01	0*	7.26E-02	1.57E+00	1.15E-01	-1.36E-01
Contribution to radioactive waste disposed	kg	4.77E-04	3.28E-04	9.17E-06	1.05E-05	1.25E-04	4.64E-06	-5.80E-05
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	5.86E-02	0*	0*	2.64E-02	0*	3.22E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2309015_V1	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°		Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	2023/09	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »			

Schneider Electric Industries SAS  
 Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
 35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.se.com](http://www.se.com)

ENVPEP2309015\_V1

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

2023/09