


# EZAUX10

auxiliary switch AX, EasyPact EZC 100,  
EasyPact CVS 100BS, 1 common point  
changeover contact

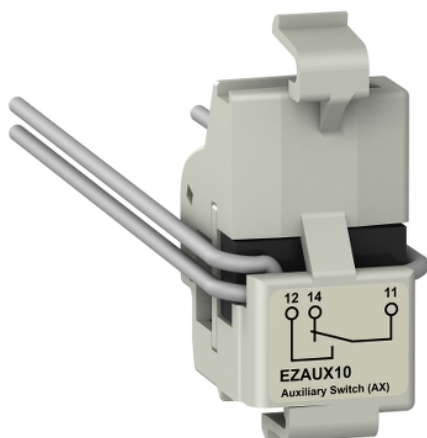

## Main

Range of product	EZC100
Range	EasyPact
Device short name	AX
Product or component type	Switch
Device application	Signalling
Range compatibility	EasyPact (EZC) circuit breaker
Signal contacts composition	1 NO/NC

## Complementary

Auxiliary contacts type	Standard
[I <sub>th</sub> ] conventional free air thermal current	5 A
[I <sub>e</sub> ] rated operational current	AC-12: 3 A at 250 V AC 50/60 Hz AC-12: 5 A at 125 V AC 50/60 Hz AC-12: 5 A at 24 V AC 50/60 Hz AC-12: 5 A at 48 V AC 50/60 Hz AC-15: 2 A at 250 V AC 50/60 Hz AC-15: 3 A at 125 V AC 50/60 Hz AC-15: 5 A at 24 V AC 50/60 Hz AC-15: 5 A at 48 V AC 50/60 Hz DC-12: 0.2 A at 250 V DC DC-12: 0.4 A at 125 V DC DC-12: 2.5 A at 48 V DC DC-12: 4 A at 24 V DC DC-14: 0.2 A at 250 V DC DC-14: 0.4 A at 125 V DC DC-14: 1 A at 48 V DC DC-14: 3 A at 24 V DC
Minimum load	10 mA at 24 V
Auxiliary connection terminal	Lead wire


## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.5 cm
Package 1 Width	7.0 cm
Package 1 Length	8.5 cm
Package 1 Weight	40.0 g

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

---

RoHS exemption information	 Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

---

**Contractual warranty**

---

Warranty	18 months
----------	-----------

---