


# Product End of Life Instructions

## Vivace 1 gang 250W push button rotary universal dimmer, white

**This range includes 1 set of 250-watt push-button rotary universal white and silver dimmers.**



## End of Life Instructions

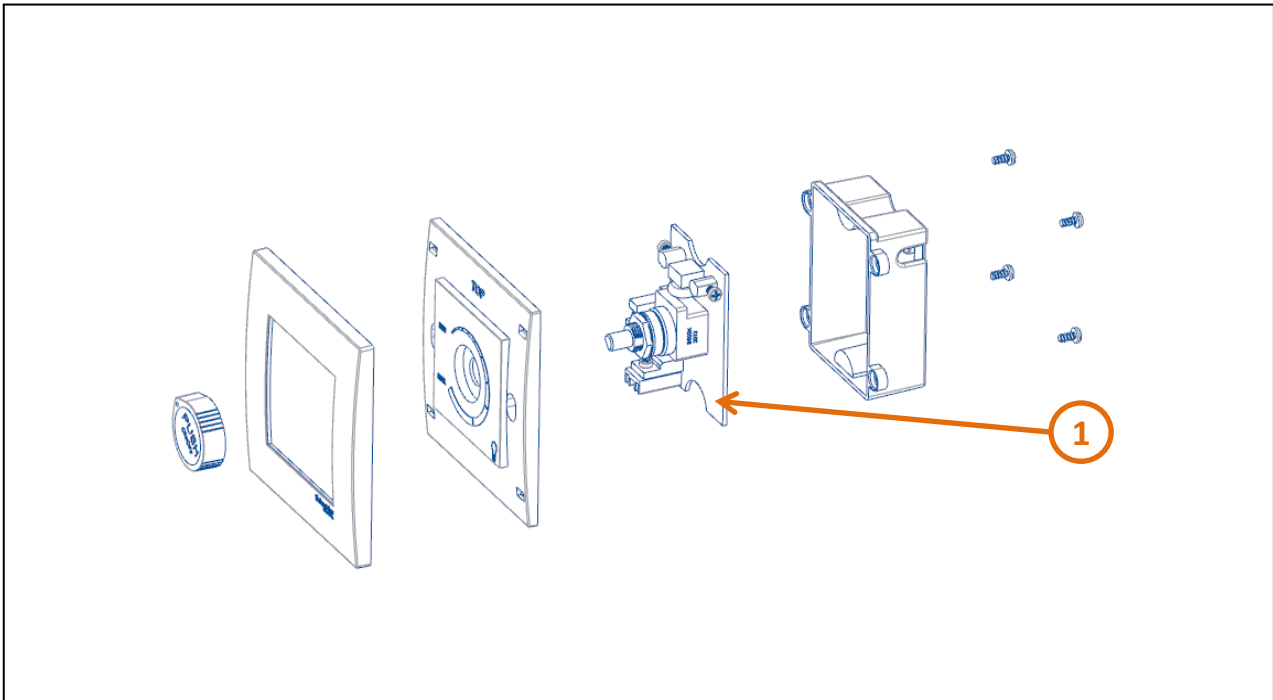

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm <sup>2</sup>	31.19	Including all soldering parts

## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main purpose of this dimmer is to control adjustable loads in different scenarios. Rotary dimmer hermal fuse protection type.
Product reference	KB31RD250_WE
Total representative product mass	87 g
Representative product dimensions	86mm x 86mm x 45mm
Accessories	No
Date of information release	2023/11

## Additional information

<b>Legal information</b>	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
<b>In case of special transportation: transportation method</b>	No	
<b>Recyclability potential</b>	<b>12%</b>	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS  
 Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
 35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.se.com](http://www.se.com)

ENVEOLI2311002\_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

2023/11