Low VF Glass Passivated Bridge Rectifier multicomp





Features

- Surge overload rating 240 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- The plastic material has UL flammability classification 94V-0
- Mounting position: Any

Maximum Ratings And Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

Characteristic	Symbol	Values	Unit
Maximum Recurrent Peak Reverse Voltage	VRRM	600	
Maximum RMS Voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	
Maximum Average Forward (with heatsink Note 2) Rectified Current @ Tc = 100°C (without heatsink)	I(AV)	15 3.2	А
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	IFSM	240	
Maximum Forward Voltage at 7.5A DC	VF	0.95	V
Maximum DC Reverse Current @ TJ = 25°C at Rated DC Blocking Voltage @ TJ = 125°C	lr	10 500	μA
I ² t Rating for Fusing (t<8.3ms)	l²t	200	A ² s
Typical Junction Capacitance Per Element (Note 1)	Cı	70	pF
Operating Temperature Range	Тл	-55 to +150	°C
Storage Temperature Range	Тѕтс		

Notes:

- 1. Measured at 1MHz and applied reverse voltage of 4V DC
- 2. Device mounted on 100mm × 100mm × 1.6mm Cu plate heatsink.
- 3. The typical data above is for reference only


www.element14.com www.farnell.com www.newark.com





Low VF Glass Passivated Bridge Rectifier multicomp



Rating and Characteristic Curves

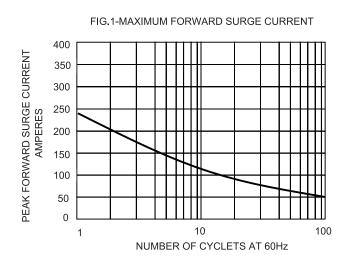

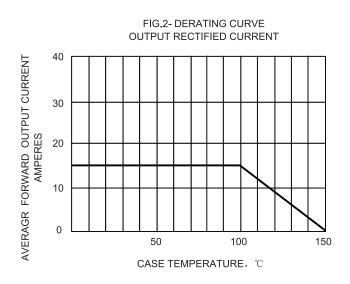

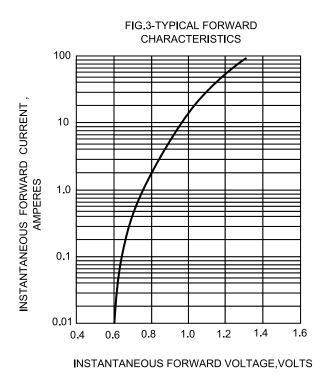

CHARACTERISTICS 10 INSTANTANEOUS REVERSE CURRENT, MICROAMPERES T.I=25°C 0.01 100 120 PERCENT OF RATED PEAK REVERSE VOLTAGE

FIG.4-TYPICAL REVERSE


www.element14.com www.farnell.com www.newark.com



Low VF Glass Passivated Bridge Rectifier **multicomp**



Dimension:

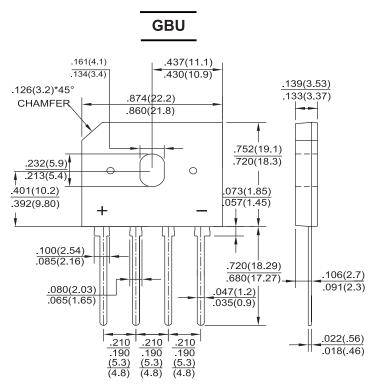

Dimensions: Inches (Millimetres)

Part Number Table

Description	Part Number	
Low VF Glass Passivated Bridge Rectifier	GBU1506F	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com www.farnell.com www.newark.com

