

3,100 Watt Inverter Computer Module Replacement


This bulletin covers all Champion 3,100 Watt Inverter models.

Note: Read instructions completely before performing service.


You will need the following tools:

10mm socket, 7mm socket and wrench, and a Phillips Screwdriver

1. Remove the three screws along the top handle on the air cleaner side of the inverter. Also remove the two screws on the side of the panel and the two 10mm bolts at the bottom of the side panel.

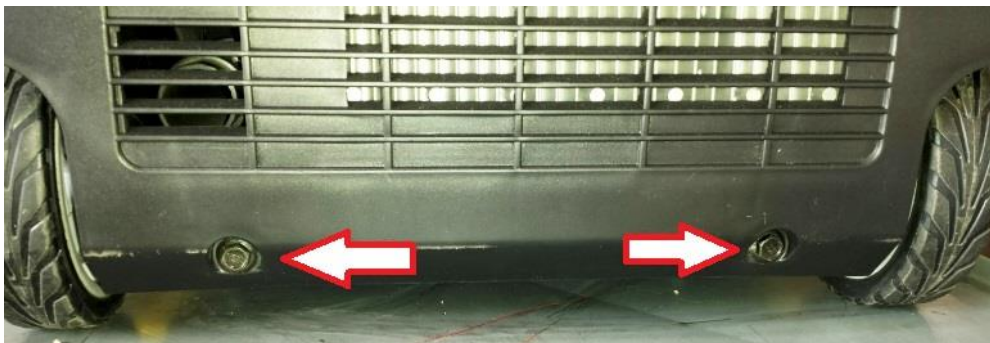

2. You can now swing the panel open to the left. This will expose the control unit. Remove the two 7mm bolts and plates holding the control unit in place. Also remove the bolt and nut holding the DC output module. Slide the control unit straight up and out of its holder.

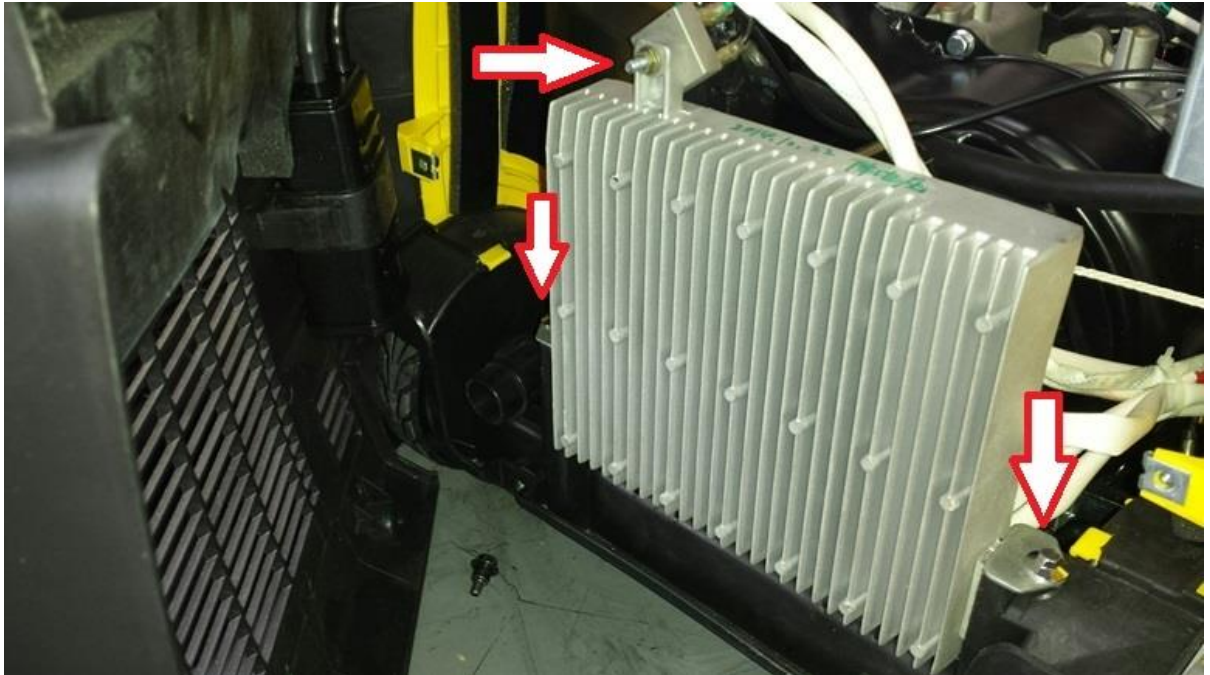

3. Begin disconnecting the control unit's wire harnesses. You can now discard the old module and install replacement module. Reverse previous steps to complete service.





Service Guide

Number: 6020001

If you have any questions, please contact Champion Power Equipment:

Champion Power Equipment, Inc.
12039 Smith Ave.
Santa Fe Springs, CA 90670
Phone: 1-877-338-0999

Email: tech@championpowerequipment.com