

LED Work Light Installation Instruction



1

In order to install and use the light correctly, please read the instruction carefully after unpacking, to ensure the security and durability of the lights.

1.Light Structure and Features

- This light is unique, novel.360degrees remote control led search light.
- It adopts unique high transparent anti glare lens,and has a PC protect cover in the front.
- It has good waterproof, dustproof.
- It adopts USA CREE chip.

2.Using Range

Applying to home, farm, rescue activities, entertainment venues,emergency lighting,etc.

3.Product Model & Parameters

- Model: SM-2009
- Size: 230*185*150 (mm)
- Power: 50W
- Voltage: 12Vor24V
- Luminous flux: 3200lm
- Beam types: Spot
- LED Bead Quantity: 10pcs*5W (USA CREE chip)
- Color temperature: 6500K
- Dust-proof, Waterproof: IP67
- Material: ABS plastic housing, ADS12 die-casting aluminum shell,intensify PC cover, PMMA lens
- Weight: 3.80 kgs
- Rotation: H360 V120
- Remote distance: 100m
- Cable length: 280cm

4.Installing Requirement & Maintenance


- First of all, all the component and accessories should be organized.
- Before installation, test the light to make sure it can work properly.
- Take the magnetic lamp holder to ensure stable

2

- adsorption in the surface.
- Power supply connection 1: insert directly into the cigarette lighter



- Power supply connection 2: external power source




- Finally, make sure the light is installed steadily, and then start the power.

5.Notes

- It is unqualified if there was breakage in the light shell or glass/plastic cup; the light should not be used.
- When installing, the power should be cut off to avoid injury to body.

6.Drawings

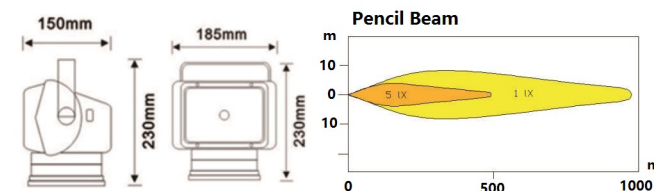

3