
Dreame Pocket

High-Speed Hair Dryer User Manual


In the box

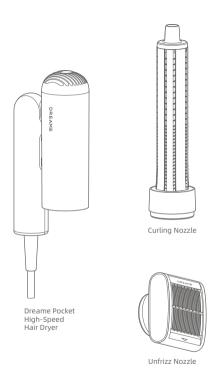

Some Nozzles may not be included. You can buy additional attachments at https://global.dreametech.com

Getting started





- 1 Air Outlet Vent
- 2 Handle
- Shaft
- 4 Temperature settings/Airflow temperature indicator light
- On/Off Switch & Speed Settings
- 6 Removable Airflow Filter

For safety reasons, do not use the hair dryer without the airflow filter.








These symbols mean "Do not use while bathing or showering." Illustrations of the hair dryer, accessories, and user interface in the user manual are for reference purposes only. The actual product may vary due to product updates and improvements.

Settings

On/Off Switch & Speed Settings

Slide up and down to quickly switch between the two speed settings.

Make sure that the switch is turned off before plugging the hair dryer in.



Temperature Settings

Press to cycle through the four heat settings: cold air, warm air, hot air, and hot/cold cycle.


Press and hold to switch to coldair, the temperature will return to its previous state after letting go of the button.



Quickly Switch To The Cold Temperature Press and hold the temperature button
to quickly switch to the cold temperature setting for styling. Release the temperature button to revert to the original temperature settings.

Hair Dryer Form

The Pocket can be switched between three forms for different styling scenarios.



Nozzle Functions and Usage

The hair dryer comes with magnetic nozzles that are easy to install and remove. Simply line up the nozzle with the metal ring around the air outlet to snap it in place.

Create a Smooth and Straight Hairstyle

Use the Unfrizz Nozzle

The combination of three-stage acceleration and streamlined surfaces create a powerful suction air flow that straightens your hair and smooths flyaways. Use with a comb to add a natural curve

Step 1

Dry your hair with the Dreame Pocket hairdryer.



Step 2

Attach the Unfrizz Nozzle, arrow indicates the direction of airflow, hold the nozzle close to your hair so that the strands are drawn to the nozzle, then slowly move the nozzle down until you reach the ends. Use on blow-dried hair to smooth flyaways.






Create a Smooth and Straight Hairstyle

Step 3

When you are done using the nozzle, let it cool down before removing it by grasping both sides of the nozzle.



^{EN} Create a Curly Hairstyle

Use the curling nozzle

The suction curling nozzle lets you blow dry and style at the same time, saving you time and preventing damage to the hair.

Step 1

Dry your hair with the Dreame Pocket hairdryer.



Step 2

Attach the curling nozzle, take a section of hair and hold the curler near the end of the hair. The hair will automatically wrap around the curler.




ER

Create a Curly Hairstyle

Step 3
Hold the curler close to your head for 15 seconds.




Step 4
Press and hold the mode button to enter cool mode and hold for 5-10 seconds to set the curl. Turn off the hairdryer to release your hair.



^{EN} Cleaning and Maintenance

The removable airflow filter is fixed in place by snaps. Turn in the direction indicated to remove.



Rotating airflow filter



Remove the airflow filter

The metal filter needs to be cleaned regularly to prevent debris from building up and maintain a smooth flow of air.

Cleaning and Maintenance

Use a dry, lint-free cloth, soft brush or toothbrush to remove any debris stuck to the surface of the airflow filter or stainless steel filter





Cleaning Metal filter



Do not rinse the metal filter with water as this may prevent it from working properly.

After cleaning, reinstall the airflow filter, making sure it snaps firmly back into place.

Basic Parameters

Product name	Dreame Pocket High-Speed Hair Dryer
Model number	AHD51
Rated voltage	220-240 V~
Rated frequency	50/60 Hz
Rated power	1300 W
Product dimensions	50×145×201 mm



User manual version number: V1.1

Service website: https://global.dreametech.com Manufacturer: Dreame Trading (Tianjin) Co., Ltd. Address: 2112-1-1, South, Finance and Trade Center, 6975 Yazhou Road, Dongjiang Bonded Port Area, Tianjin Pilot Free Trade Zone, 300463 Tianjin, China