


2.7K Binocular Night Vision

USER MANUAL

NV-L7000

Product Overview

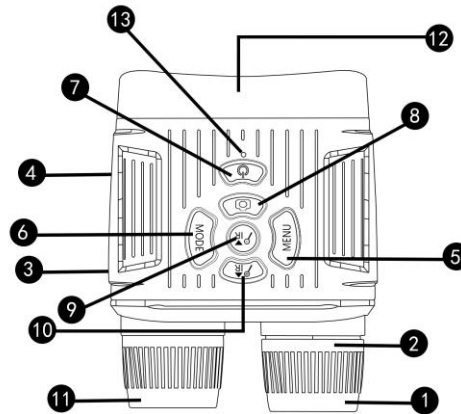


















1	Lens	7	Power ON/OFF
2	Manual focus wheel	8	OK/ Shoot Button
3	Mini SD card slot	9	IR Down/Zoom out or Down Button
4	USB port	10	IR Up/Zoom in or Up Button
5	Menu/ESC	11	Infrared filter cap
6	Work Mode (Photo/Video/Playback)	12	3.0 Inch Screen
		13	Work Indicator light

Specifications

Video Resolution	2.7K.1080P/720P
Photo Resolution	6M/9M/14M/24M/36M
Language	EN/DE/FR/IT/ES/PO/NL/PL/RU/JP/KR/CN
Time Setting	2023-05-24 11: 51:51
Screen Saver	OFF/1 Minute/2 Minutes/3 Minutes
Screen Brightness	Level 1/2/3/4/5/6/7
Auto Power Off	OFF/1 Minute/3 Minutes/5 Minutes/10 Minutes
Date Tag	ON/OFF
Frequency	50/60HZ
Audio	ON/OFF
Default Setting	Cancel/OK
Format	Cancel/OK
Version	Version:J10.11.23
Aperture	F 1.2 f=25mm
Lens Angle	FOV=10°, diameter: 25mm

Display Screen	Inner 3.0"inch (800*480)TFT LCD
Digital Zoom	10X
Storage Media	Micro SD card, Max up to 128GB
Viewing Distance in 100% darkness	150-200M
Viewing Distance in weak light or day time	3M~Infinity
IR LED	3W, 850nm, 9 levels
USB Port	Type C USB 2.0
Power Source	Built-in 2000mA battery
Operating Temperature	-20°C to +60°C
Storage Temperature	-30°C to +70°C
Net weight	approx.300g

Quick Start

- 1: Insert Micro SD card (up to 128GB), Long press  key to 2-3s, the indicator light shows blue, the device will power on, After power on, adjust the object clearly through the focus wheel, and press  key, manual take photo or video record, and long press  key to shutdown
- 2: press  key, setting work mode (photo, video, playback), on playback mode, press  key to playback, and press  key again, exit playback
- 3: press  key, go to menu setting parameters, press  or  up or down key to choice, and press  key to confirm, after settings, press  key again to ESC and exit menu
- 4: short press  key to open IR LED, press it again to add one level until 9 Levels (Max), short press  key to reduce one level until 0 level (Mini) and close IR LED
- 5: Long press  key, Zoom in, Max 10X, long press  key, Zoom out, Mini 0X, for the objects of long range or nearly range, Zoom in or out first, and adjust the clearly object through the focus wheel, press  key to take photo or video record and save SD card
Note: Turn on IR LED status, can not zoom in or out, need to close IR LED first
- 6: Long press  key 2-3s to shutdown, take out SD card after shutdown, read the data files with card reader or connect USB cable on PC
- 7: Charging, the indicator light shows red, and connect it to DC 5V adapter or Power Bank with USB cable; after charging, the indicator light goes out