




# ACTIVATING YOUR LIGHT RIDER / ESA2 DMX INTERFACE

Your BeamZ DMX interface needs to be activated before it can be used with ESA2 and Light Rider.  
An internet connection is required.

## STEP ONE

### DOWNLOAD AND INSTALL THE LATEST ESA2 BEAMZ SOFTWARE VERSION

The latest software version can be found at [www.dmxsoft.com](http://www.dmxsoft.com)

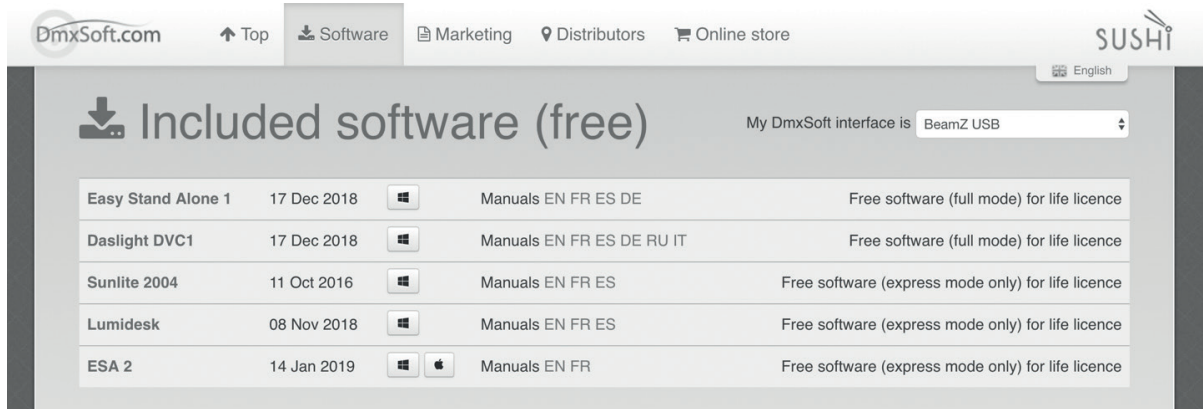

## STEP TWO

### CONNECT YOUR BEAMZ DMX INTERFACE TO YOUR COMPUTER AND START THE SOFTWARE

## STEP THREE

### ENTER YOUR ACCOUNT DETAILS

Your BeamZ DMX interface needs to be linked to your DMXSoft account.  
If you do not have an account, one can be created at [store.dmxsoft.com](http://store.dmxsoft.com)

## STEP FOUR

### ENTER YOUR 20 CHARACTER KEY

This can be found on a plastic keycard supplied with your device.

### MORE CHANNELS? NEW SOFTWARE?

Upgrade to a new software version, or load your  
BeamZ DMX interface with extra channels.

Please visit [www.dmxsoft.com](http://www.dmxsoft.com)





# GETTING STARTED WITH LIGHT RIDER



## STEP ONE

Download Light Rider from the **Apple App Store**, **Amazon App Store** or **Google Play Store**

## STEP TWO

Connect the BeamZ DMX interface to a 5v USB power supply using the included USB-C cable.

## STEP THREE

Open your WiFi settings and select Smart DMX Interface XXXXXX where X is the serial number.  
The default password is **00000000**

## STEP FOUR

WiFi settings can be configured using the Hardware Manager available at [www.lightriderapp.com](http://www.lightriderapp.com)

### CHECK OUT [WWW.LIGHTRIDERAPP.COM](http://WWW.LIGHTRIDERAPP.COM), HERE YOU CAN:

- Add more channels to your BeamZ DMX interface
- Add more software to your BeamZ DMX interface
  - Download the full app user manual
  - Download the datasheet
  - Watch video tutorials