22 Emergency Lights>Universal LED Emergency Kit

89005A/EME



Emergency pack for 5-50W LED downlights, slim for built in installation.

3 hours maintained.

Supplied complete with Ni-Cd 3,6V 4,0Ah battery.

Complies with standard EN61347-1 and any other specific standards.


IP20 CE

Downloads

Dimensions



Wiring Diagram

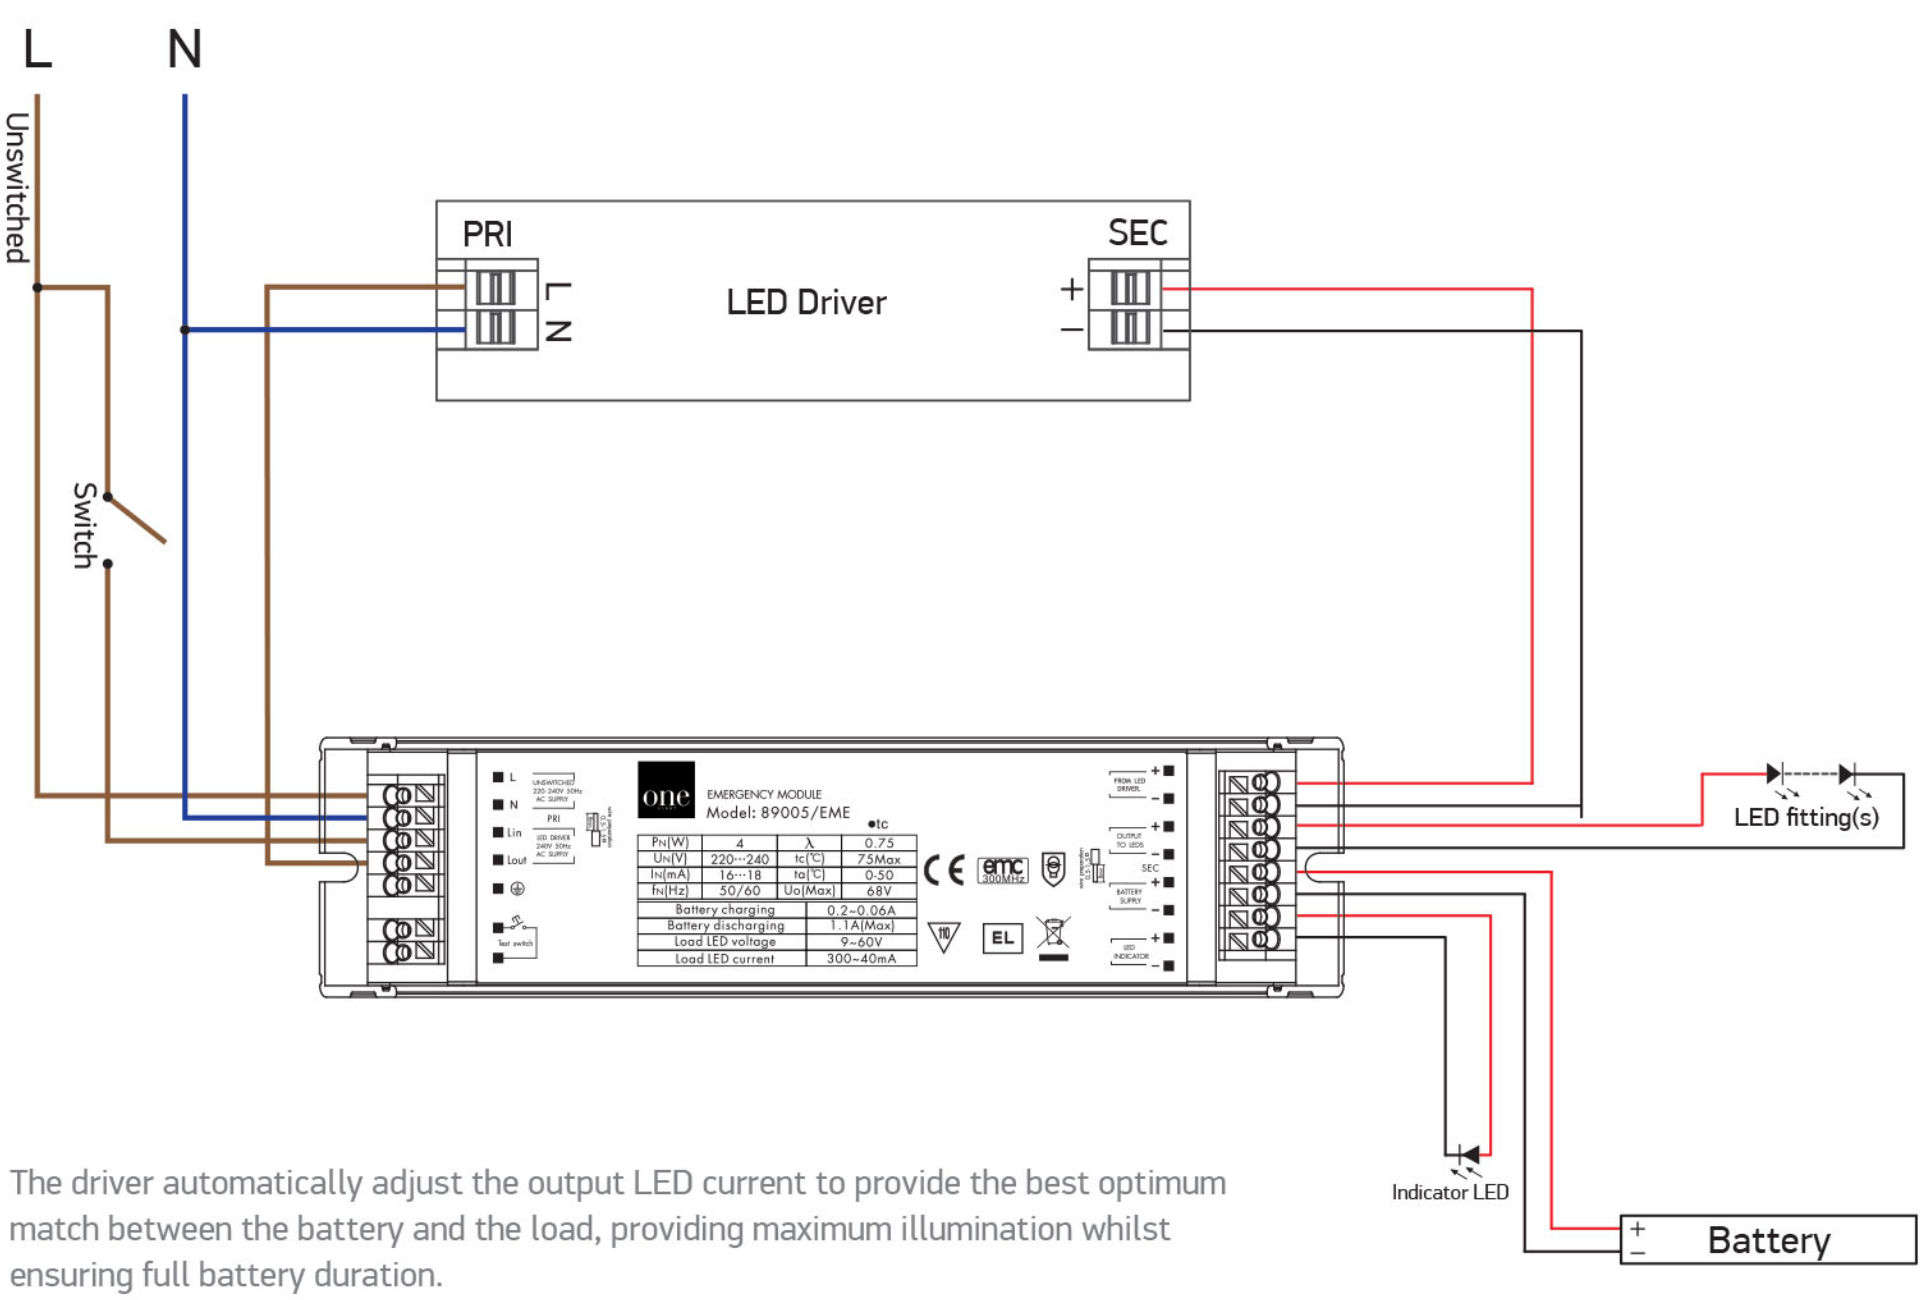

The driver automatically adjust the output LED current to provide the best optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Physical Specification

Item Group	22 Emergency Lights
Family	Universal LED Emergency Kit
Order Code	89005A/EME
Shape	Rectangular
Length	160mm
Height	22mm

Electrical Characteristics

Gear

Gear Type	Emergency Kit
Input Voltage	220-240V
50 Hz	Yes

60 Hz	Yes
Power(Watts)	5-50W
Output	320mA-40mA
Voltage Range	8-60V
IP Rating	IP20
Dimmable	N/A
Operating Temp	55°C
Housing Material	Plastic
Output Terminal	Connector
Brand	One Light Ltd
Battery Capacity	4000mAh
Battery Voltage	3,6V
Operation Time	3 Hours
Charging Time	24 Hours
Maintained	Yes
Non Maintained	Yes

Packing Info

Box Weight	0.658kg
Pcs/Carton	12
Barcode	5291889062721
HS Code	8504408290

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes