


USER MANUAL Hotel Phone Hotel Phone(HA9888-10TSD)

1. A summary about this hotel telephone.

Use the application-specific integrated circuit technology, produced according to the international general standards. In such conditions, our products can be guaranteed with the advanced functions, stable performance and reliable quality. It can achieve a number of special services when cooperate with SPC telephone exchange, and can use with a variety of standard switches. In order to make sure that you can use the phone better, please read this instruction carefully before use.

2. Product structure diagram

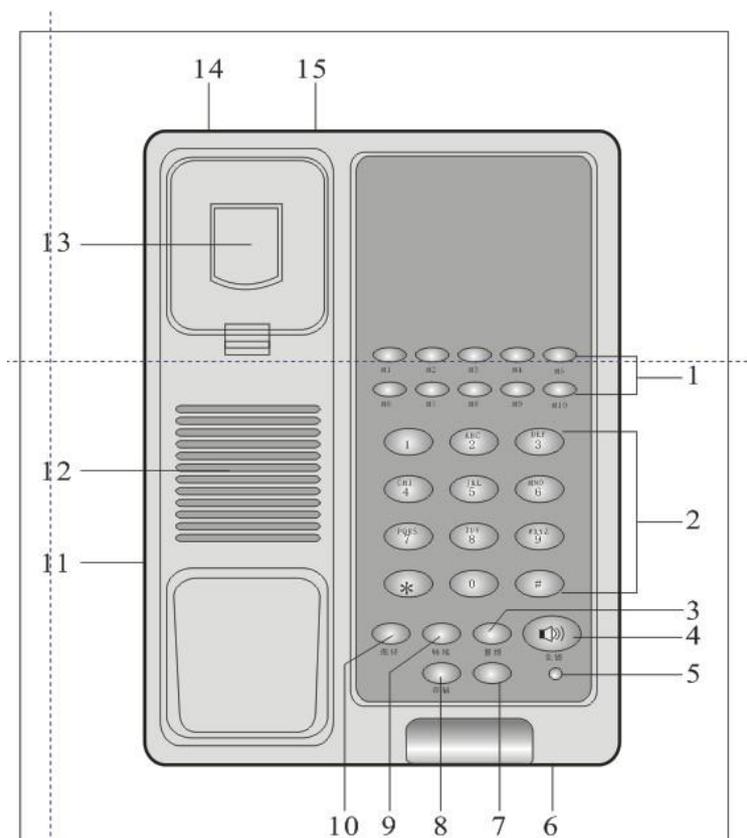

1. One-touch button
2. Number button
3. Redial
4. Hands-free
5. In use indicator light
6. Speakerphone
7. Pause
8. Storage
9. Flash

10. Hold
11. The socket of telephone line
12. Loudspeaker
13. Hook switch
14. The socket of outside line
15. The socket of extension

3. The main functions and features

- * One-touch memory keys
- * Hold, Flash, Store, Pause function
- * LED indicator for incoming calls
- * Retain stored data even when power is lost
- * Redial last number function
- * Speakerphone for hands-free communication
- * Desk or wall mountable

4. Attentions

1. Telephone should be installed in the place where is dry, ventilated and without corrosive gas.
2. This machine should not be placed in the high temperature, moisture and strong magnetic palace in order to ensure the normal work.
3. Do not use the organic solvent to scrubbing.

5. Installation

1. Sit the phone by attaching the stand to the bottom on the phone.
2. Place the phone on a flat surface, positioned so that the telephone cable will reach your telephone line or extension socket.
3. Plug the coiled handset cord into the handset. Plug the other end into the socket on the left of the base unit.
4. Place the handset on the unit.
5. Plug the telephone cable into the socket at the back of the base unit. Plug the other end of the cable into your telephone socket.
6. Lift the handset and check for a dial tone.

6. Operation

Ordinary calls and Hand-free calls conversion to each other:

Ordinary transfer to Hand-free: when in a call status, press "hand-free" button, then hang the handset up.

Hand-free transfer to Ordinary: when in a hand-free call status, pick the handset up.

Redial function:

Make a phone call, if on busy or not connected, then need to make a phone call again. Press the redial button after hang up to redial the last dialed

number.

One-touch Dial:

Press speakerphone or pick up the handset, and then press the one-touch memory key, this phone will dial out the fast-dialing memory stored in the key.

The steps to set up the "one-touch" number:

1. Insert the telephone line cable
2. Enter the phone number you want to set into one touch memory button (Don't pick up the handset or press the speakerphone button)
3. And then press one of the 10 groups one touch memory button for 3 seconds, then it's done.

Music On Hold:

Pick the handset up, press the "Hold" button to enter the music on hold status (keep the light flashing at same time) Let the music play, then put the handset down.

- If pick the handset up again, the music will be stopped, and it will enter into the calls automatically;
- If press the "hand-free" button, the music will be stopped, and it will enter into the "hand-free" calls automatically.