





FM-50WS-3k Audio Feast
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer

Wiring Connections

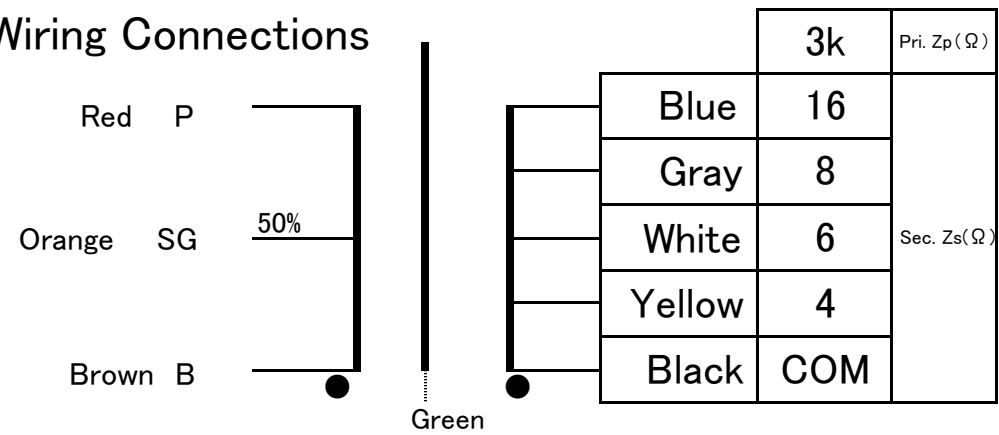


Output: 50W (50Hz)
 Freq. Response: 6~54kHz (Dc 65mA 3k-8Ω -3dB , 1W)
 Pri. Inductance: 21H (1kHz Dc 65mA)
 Pri. DCR: 72Ω Sec. DCR 0.46Ω (8Ω)
 Pri. Max DC Current: 170mA Loss 0.34dB
 Metal case dimension: 100x100x150 (H)mm Black hammered metal case, or Urushi finish
 Mounting screw: 80x80mm 4-M5

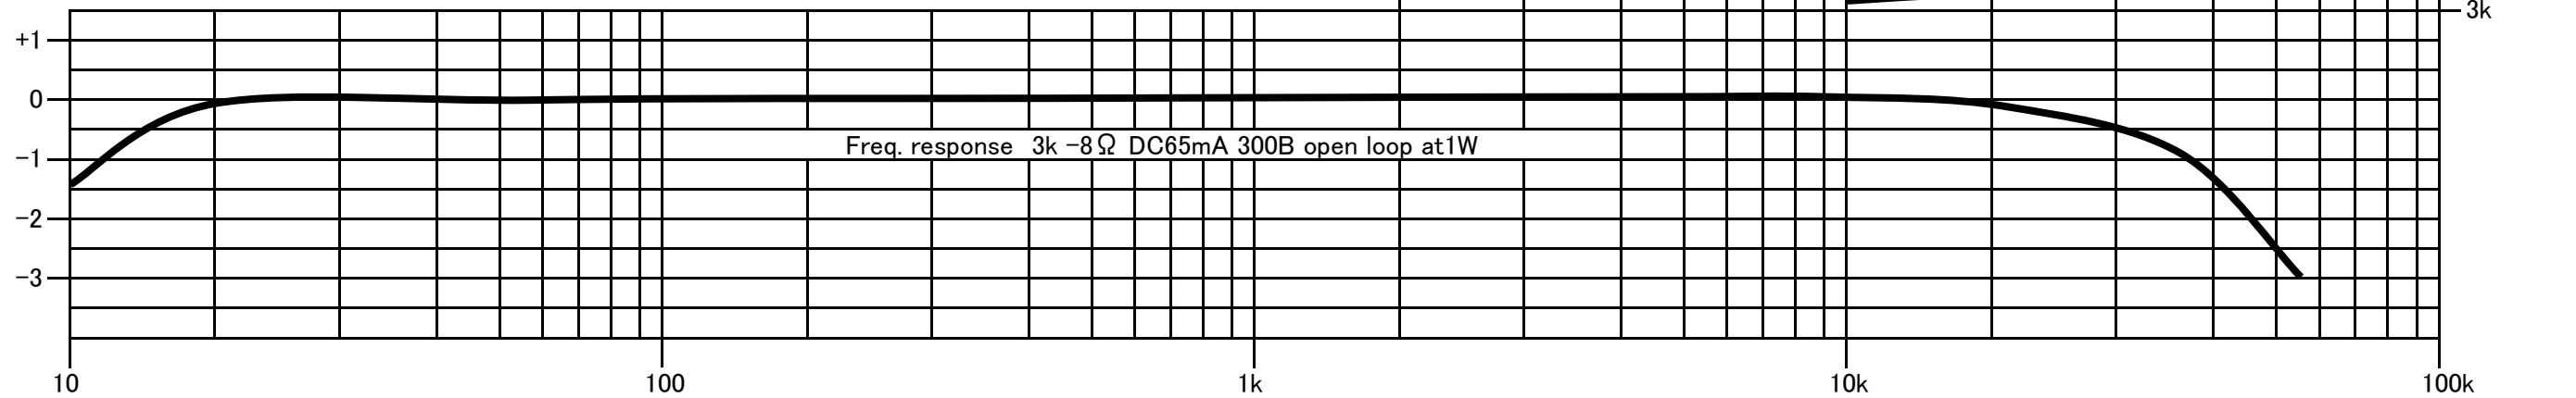

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR
Urushi finish

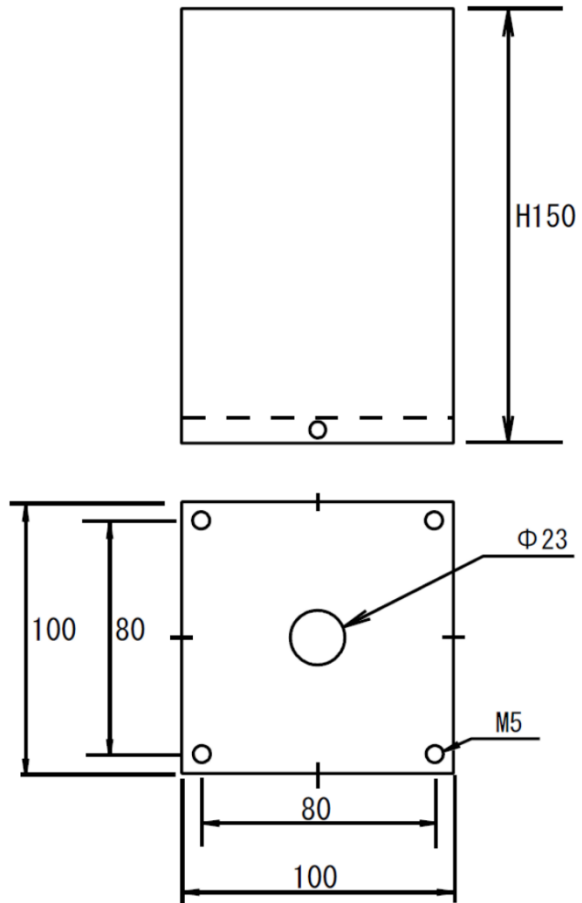

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

