






**FM-5P**  
 FINEMET® NANOCRYSTALLINE Core Push Pull Output Transformer Audio Feast

**Wiring Connections**



|        | 10k | 20k | Pri. Zp(Ω) |
|--------|-----|-----|------------|
| Blue   | 16  |     | Sec.Zs(Ω)  |
| Purple | 8   | 16  |            |
| White  | 4   | 8   |            |
| Black  | COM |     |            |

Output 5W(70Hz)  
 Freq. Response 15-55kHz(10k-8 ohm -1dB)  
 Pri. Inductance 140H(100Hz)  
 Pri. DCR P1-B(189Ω)/B- P2(189Ω), SG1-B(90 ohm)/SG2-B(90 ohm)  
 Pri. max DC Current 80mA(2 tubes) Sec. DCR COM-8Ω(0.56 ohm)  
 Dimension 68x50x48(H)mm Unbalance Current 5mA(max)  
 Mounting Screw 44x38 M3

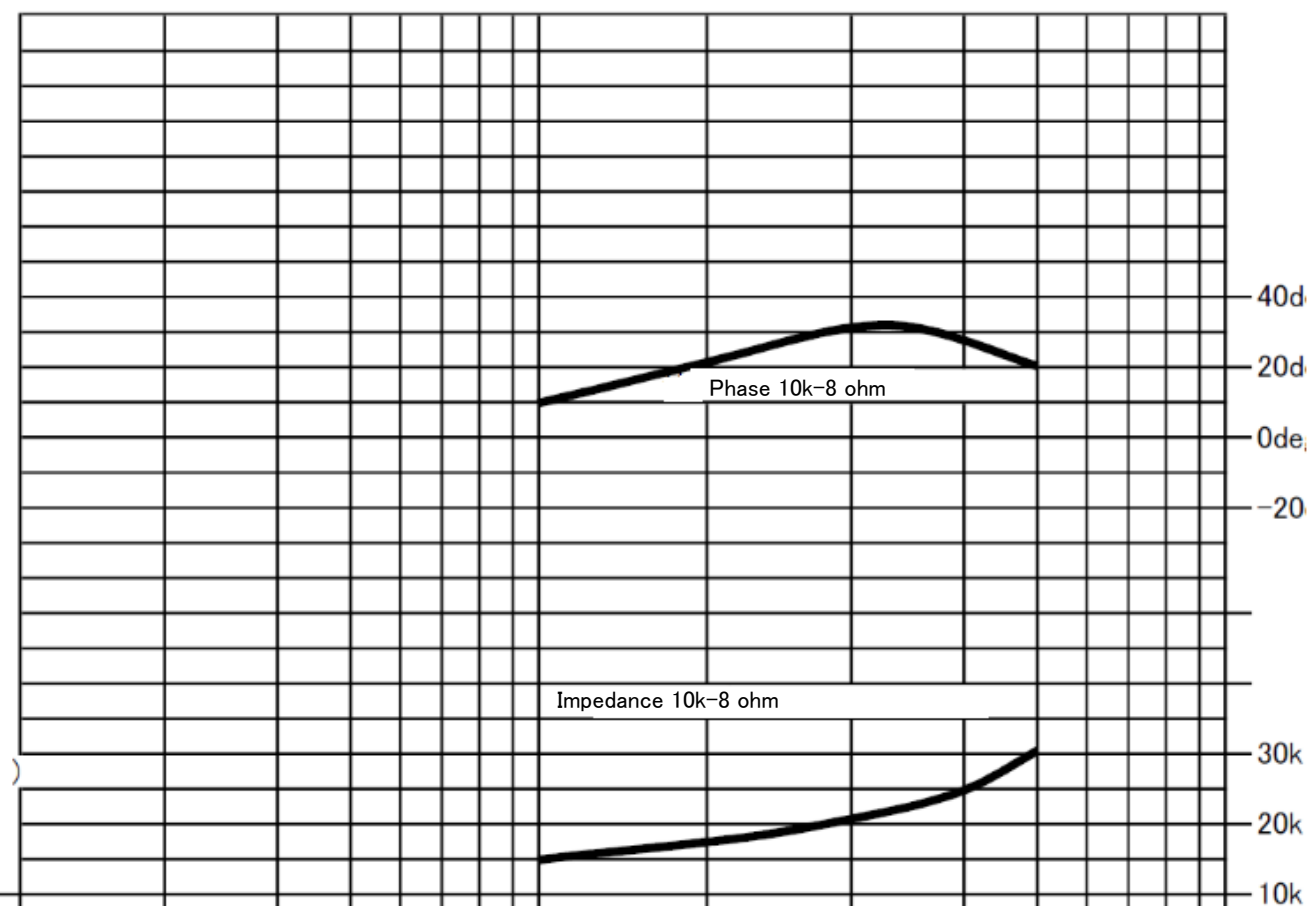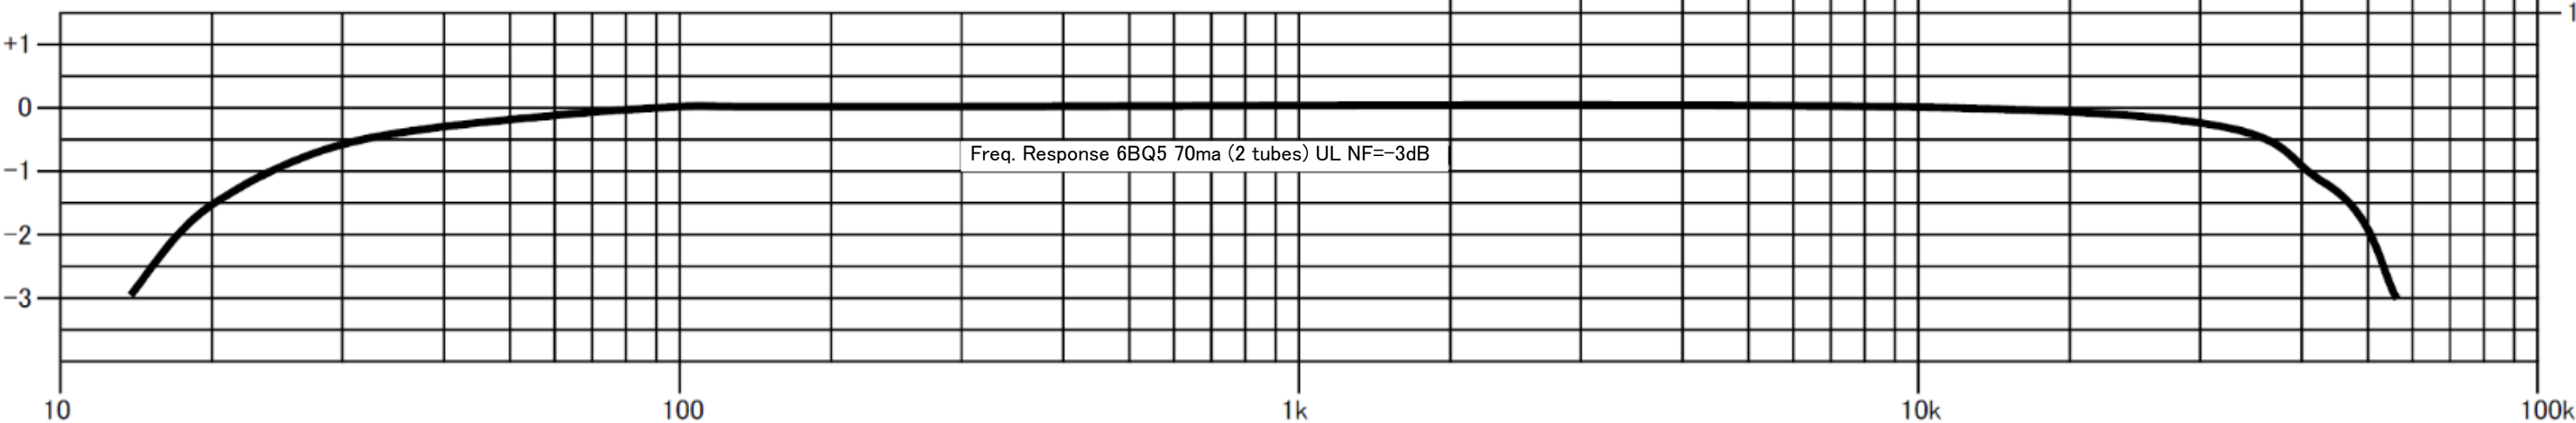

Email: [CleanUnderwear@gmail.com](mailto:CleanUnderwear@gmail.com)  
 Web: [TheAudioFeast.com](http://TheAudioFeast.com)  
 Distributed by Audio Feast (Nashville, TN, USA)  
 Final finish by Teramoto (Myoko, Japan)  
 Designed by General Ind. (Saitama, Japan)