




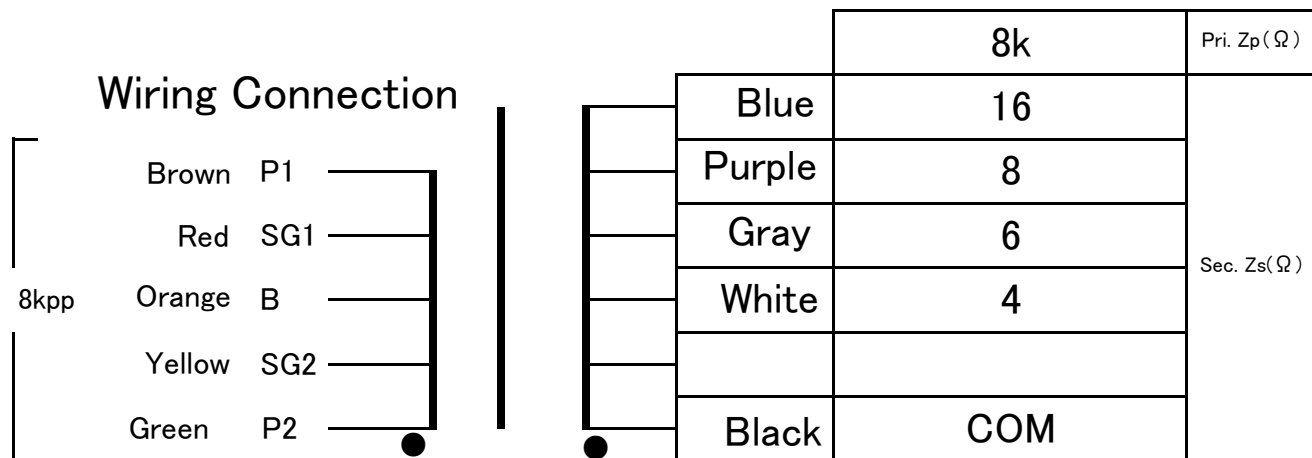

FM-30P-8K Audio Feast
 FINEMET® NANOCRYSTALLINE Core Push Pull Output Transformer

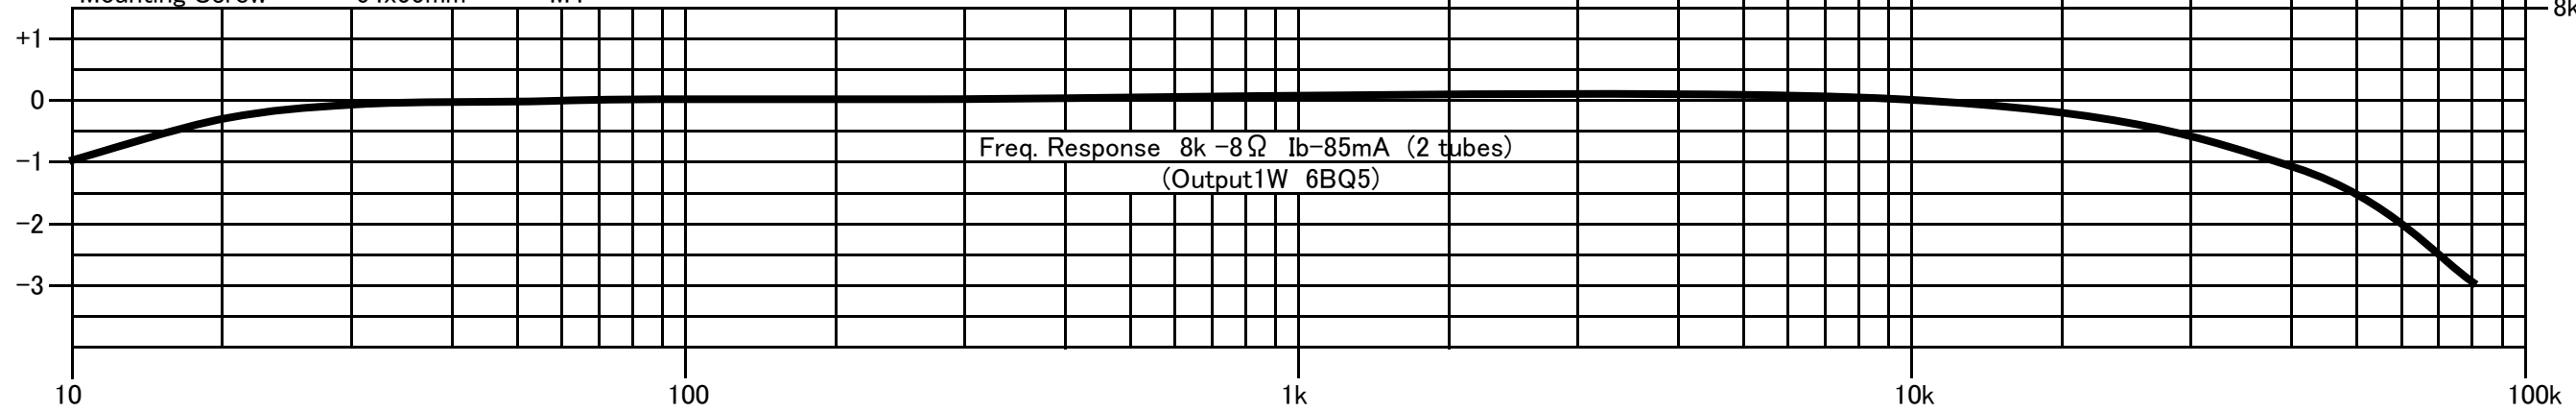


Output 30W(50Hz)
 Freq. Response 10~40kHz(8k-8Ω -1dB)
 Pri. Inductance Pri. 460H(10Hz) max
 DCR P1-B(132Ω)/B-P2(132Ω) Sec. DCR COM-16Ω(0.94Ω)
 Pri. max DC current 240mA(2 tubes) Unballance Current 5mA(max)
 Dimension 80x71x120(H)mm Black hammered metal case, or Urushi finish
 Mounting Screw 64x55mm M4

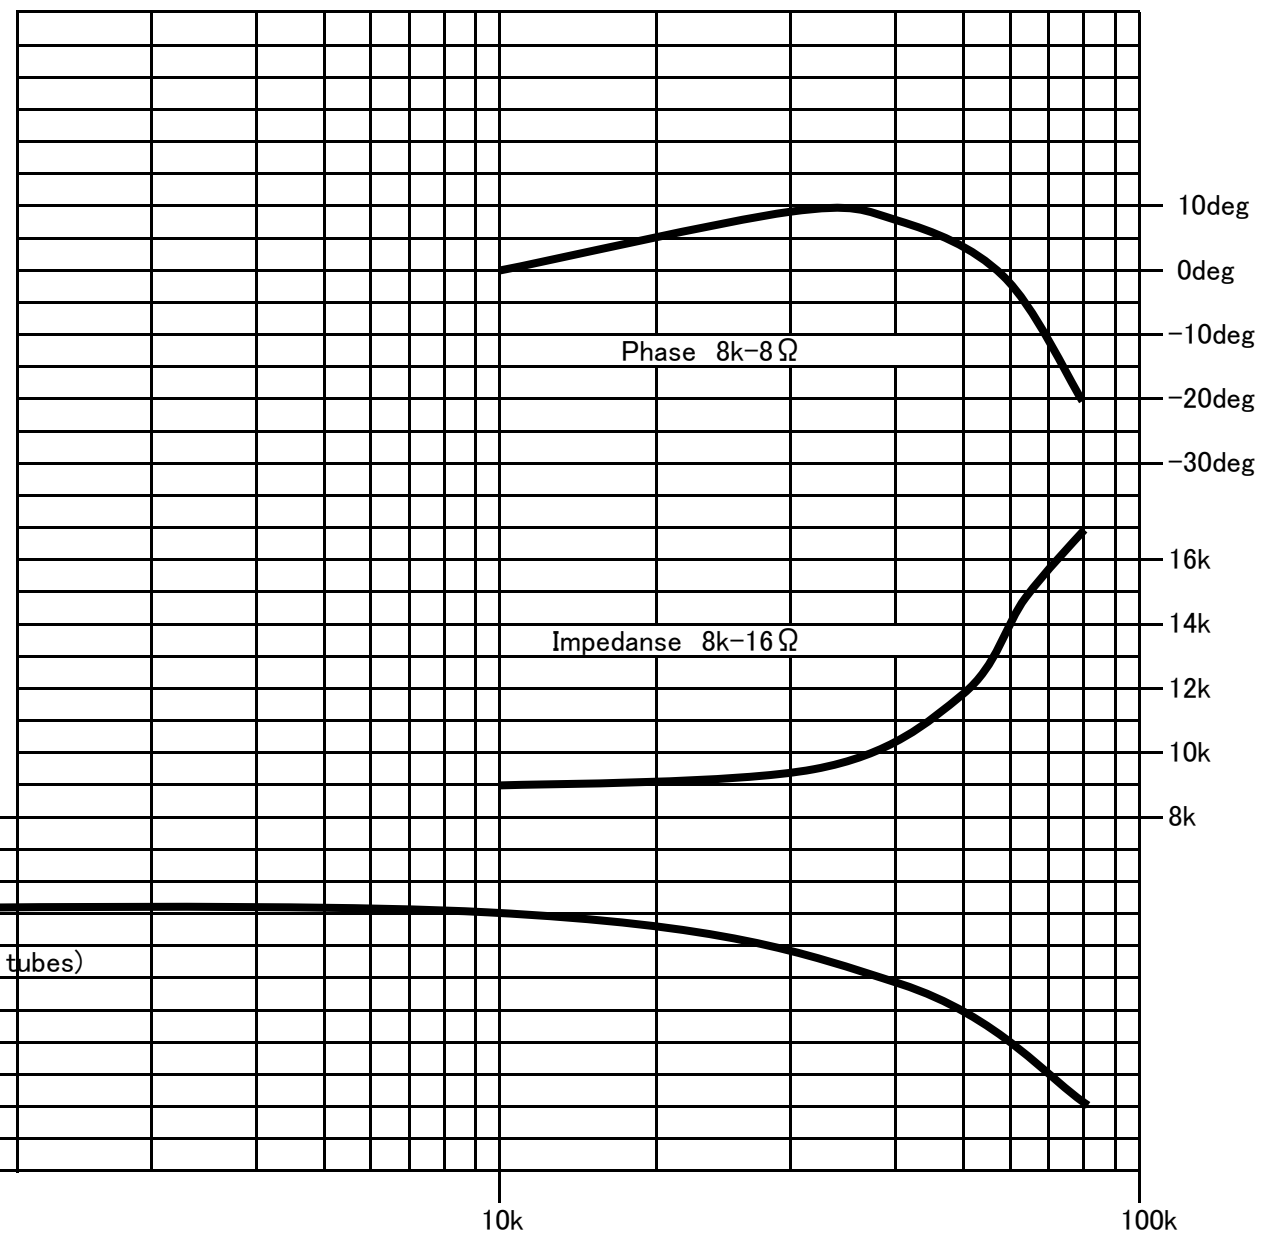

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR
Urushi finish

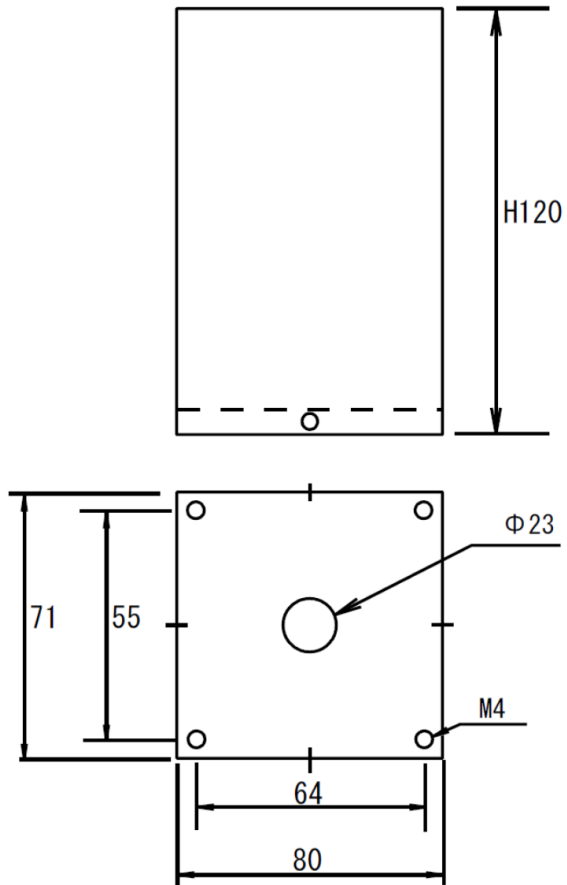

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

