





FM-60P-5K
 FINEMET® NANOCRYSTALLINE Core Push Pull Output Transformer Audio Feast

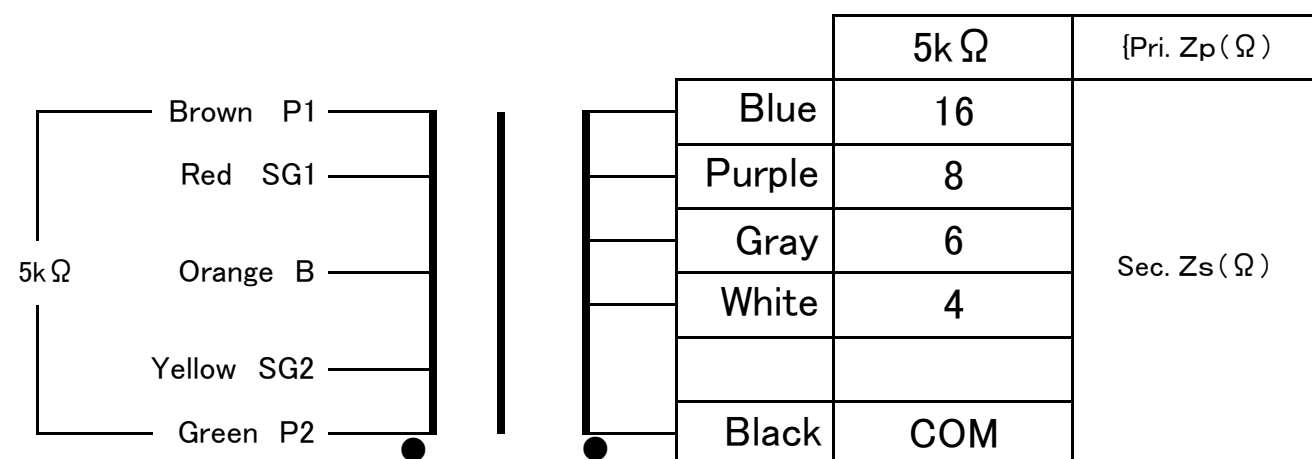


Output 60W(50Hz)
 Freq. Response 5-40kHz(5k-8 ohm -1dB)
 Pri. Inductance 520H max (10Hz)
 Pri. DCR 80 ohm (P1-B1), 80 ohm (B2-P2), Sec. DCR 0.69(com-16 ohm)
 Pri. max DC current 460mA (2 tubes, 5k ohm), Unbalance current 8mA max
 Loss 0.16dB(16 ohm)
 Dimension 100x90x120(H)mm Black hammered metal case, or Urushi finish
 Mounting Screw 80x70mm 4-M4

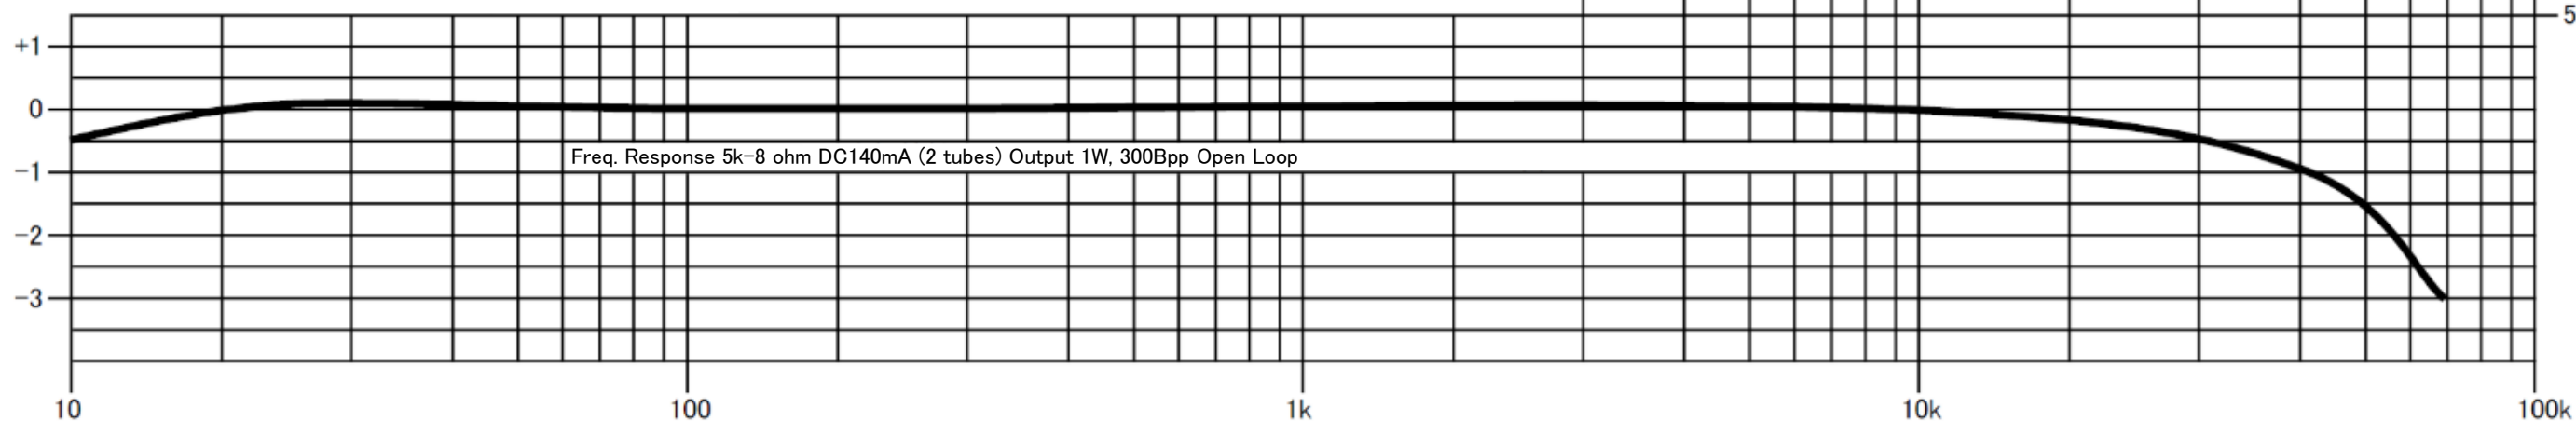

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR
Urushi finish

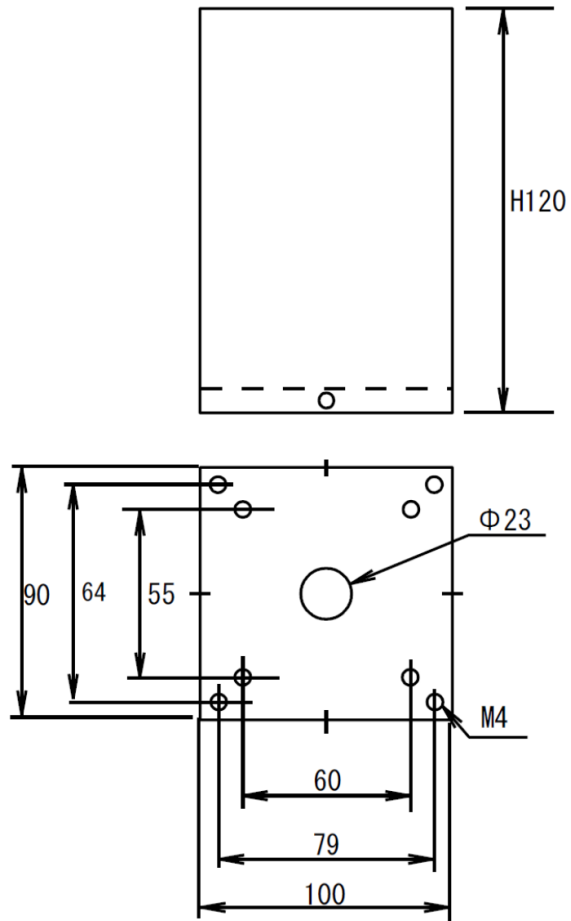

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

