




FM-8K-600CT


FINEMET® NANOCRYSTALLINE Core Line Input/Output Transformer

Audio Feast

Wiring Connection

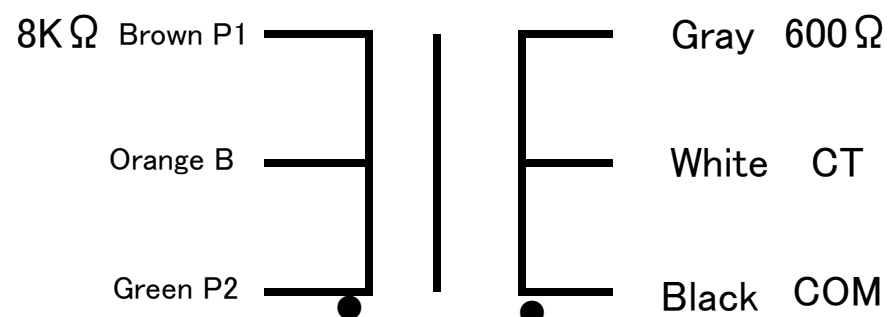

Ratio 1:0.28
Freq. Response 10-60kHz (8k -1dB)
Pri. Inductance 70H (100Hz)
Pri. DCR 158 ohm (P1-B)/158 ohm (B-P2)
Sec. DCR 32.3 ohm (com-600 ohm)
Sec. max DC current 130mA (2 tubes), max unbalance
6mA Dimension 85x57x54(H)mm Band Style

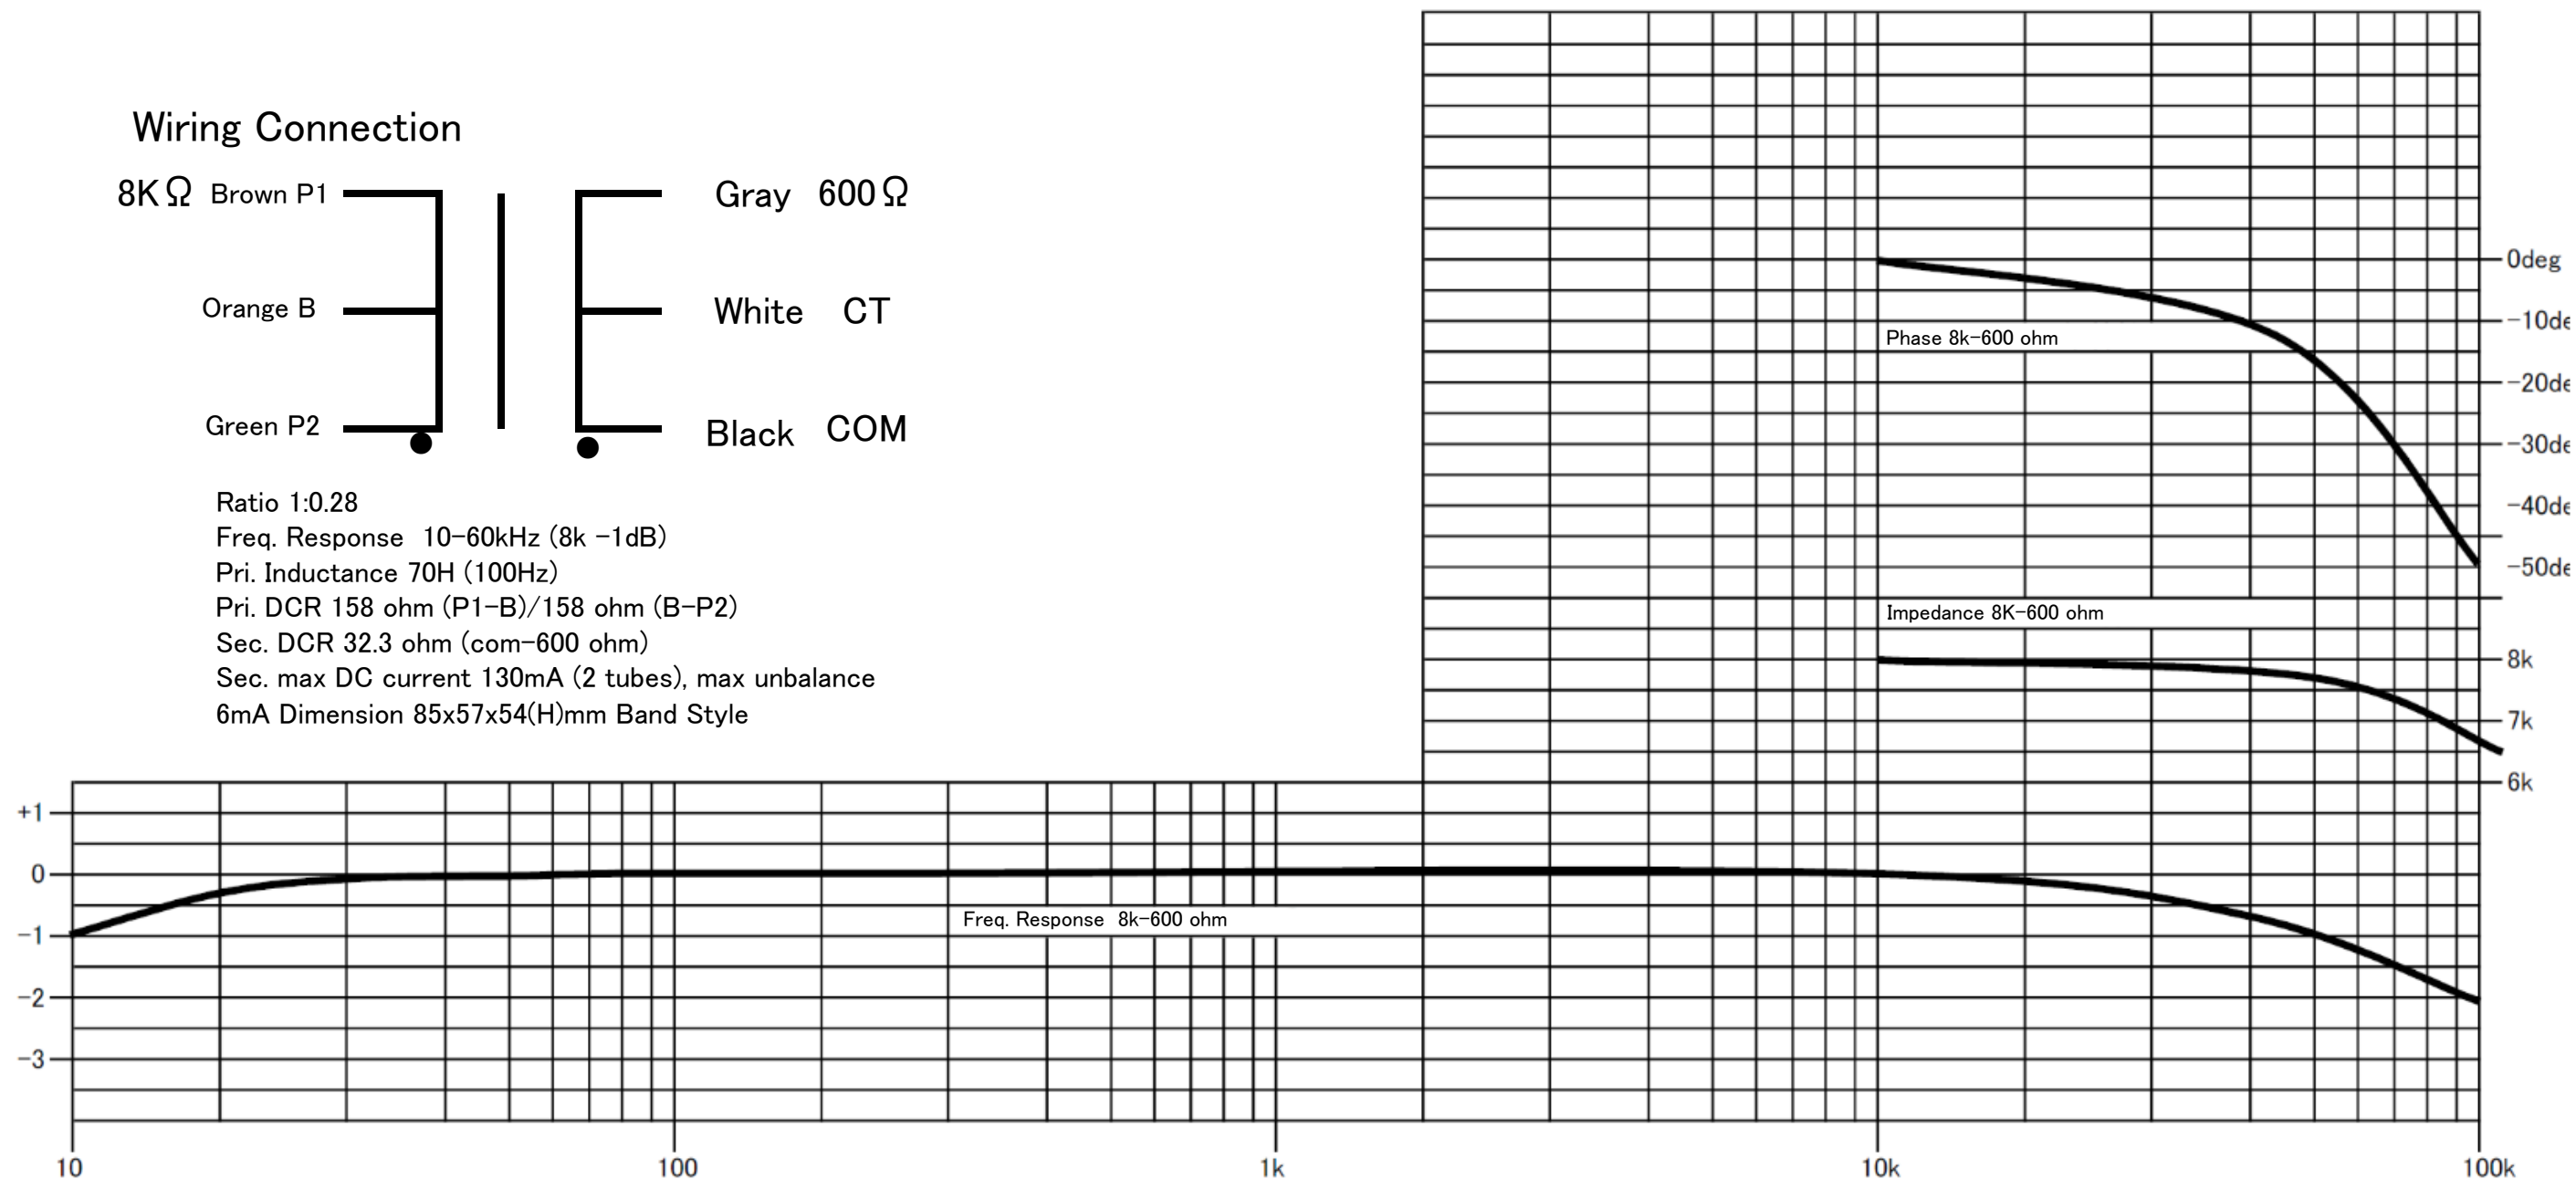

Email: CleanUnderwear@gmail.com
Web: TheAudioFeast.com
Distributed by Audio Feast (Nashville, TN, USA)
Final finish by Teramoto (Myoko, Japan)
Designed by General Ind. (Saitama, Japan)