




FM-13K-600N



FINEMET® NANOCRYSTALLINE Core Line Output Transformer

Audio Feast

Wiring Connection

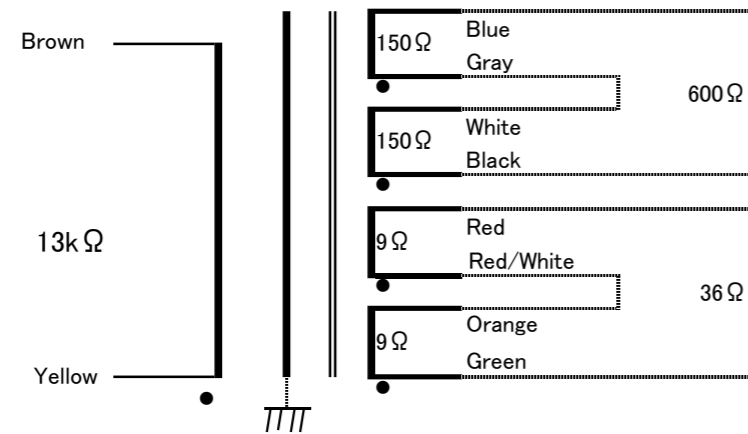

Ratio 1:0.213 (600Ω) 1:0.051 (36Ω)
 Freq. Response 5~75kHz(-3dB 0.775V)
 Pri. Inductance 100H(40Hz)
 Pri. DCR 1564Ω Sec. DCR Blue-Gray 47Ω White-Black 47Ω,
 Pri. max DC Current 15mA Red-Red/White 3.4Ω Orange-Green 3.4Ω
 Pri. max DC Voltage DC500V
 Dimension 50x55x90(H) Black hammered metal case, or Urushi finish Mounting Screw 38x44 4-M3

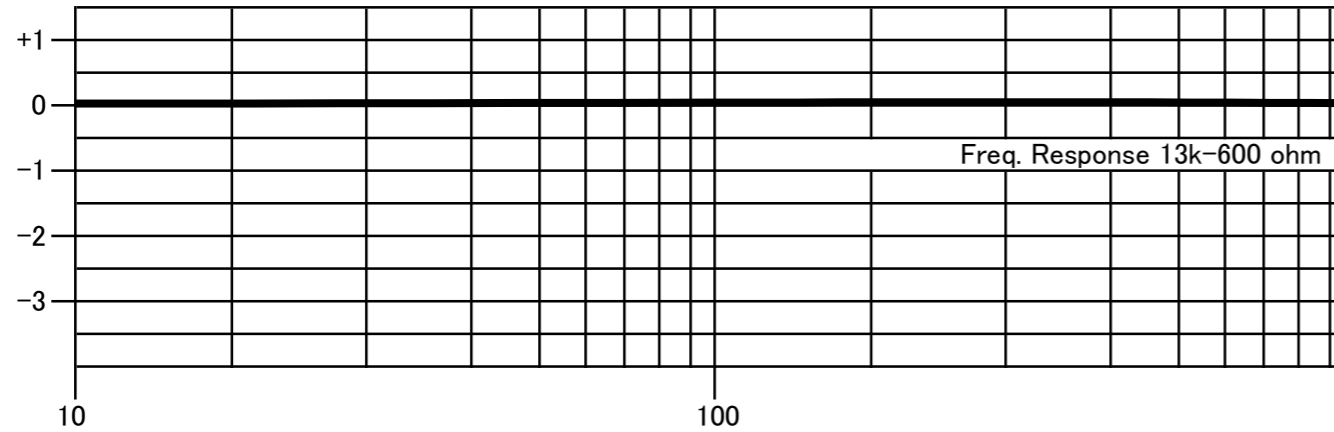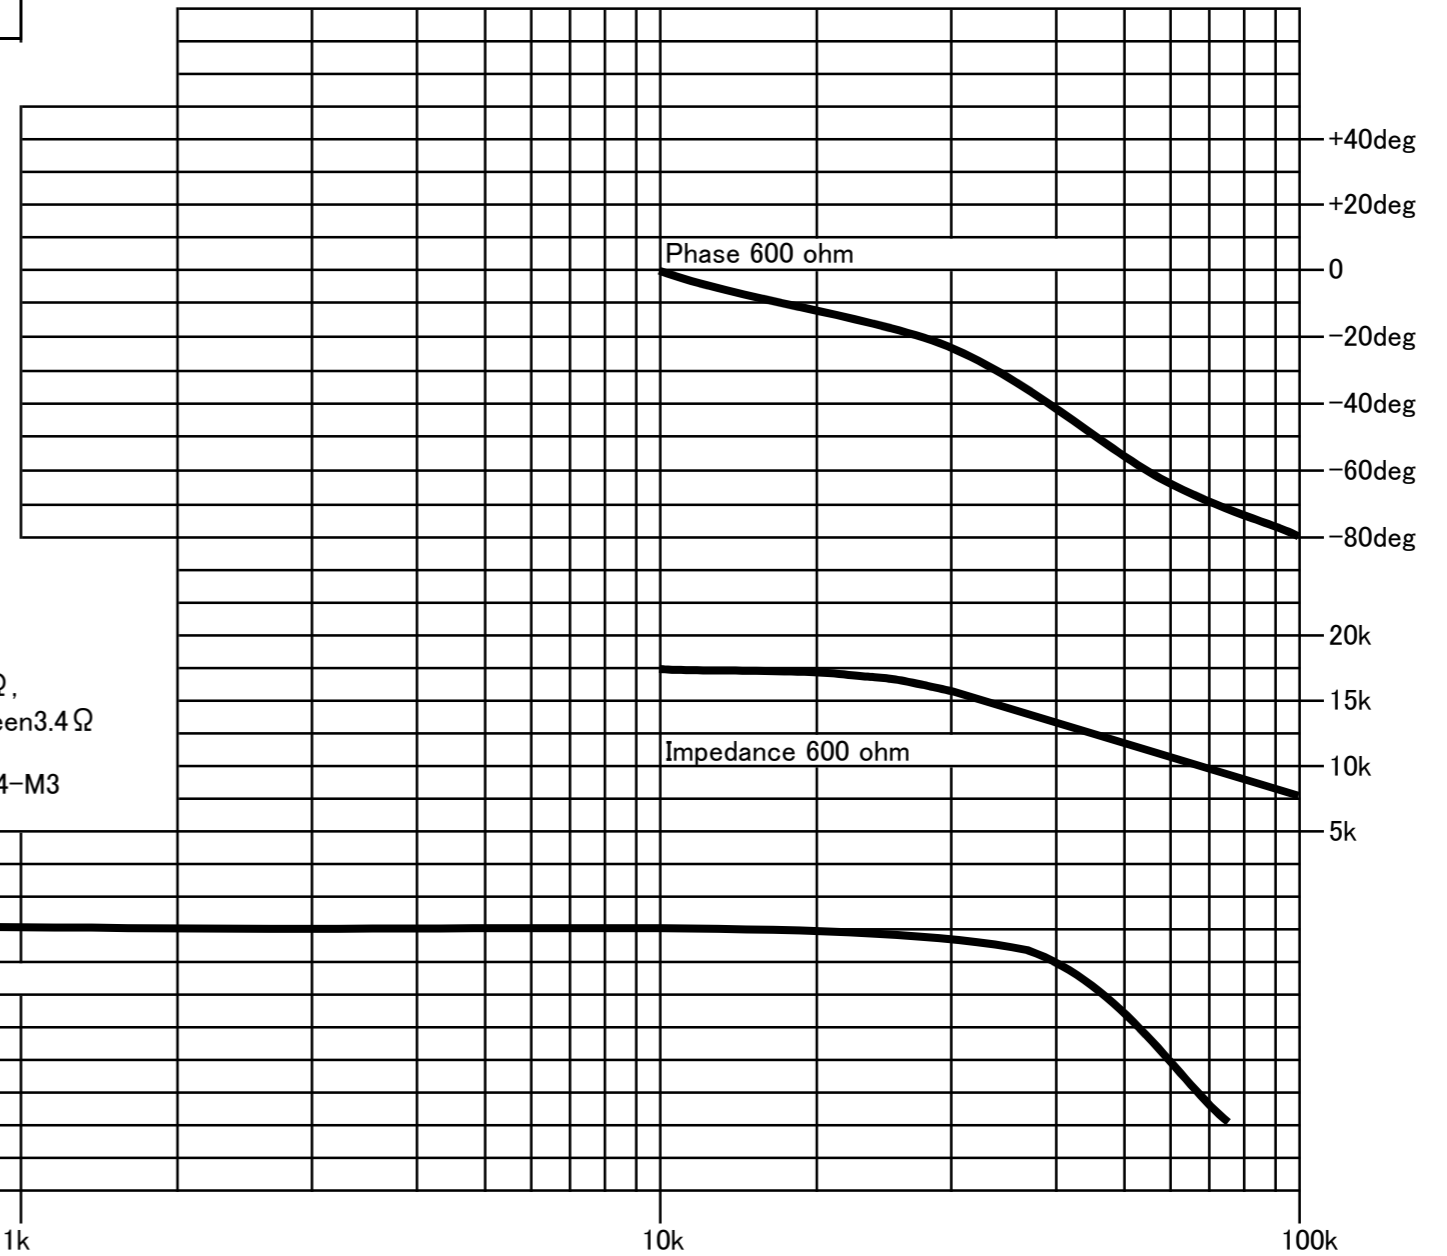

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)