


**PMF-15WS** General Transformer  
 Oriented Grain Core Single Ended Tube Amplifier Transformer



|        | 2.5k | 3.5k | 5k | 7K | Pri.Zp (Ω) |
|--------|------|------|----|----|------------|
| Blue   |      | 16   |    |    | Sec.Zs (Ω) |
| Purple | 8    |      | 16 |    |            |
| Gray   | 6    | 8    |    | 16 |            |
| White  | 4    | 6    | 8  |    |            |
| Yellow |      | 4    | 6  | 8  |            |
| Black  | COM  |      |    |    |            |

Output 15W(50Hz)  
 Freq. Respo 12~70kHz(Dc60mA 3.5k-8Ω -3dB)  
 Pri. Inductance 22H(100Hz)  
 Pri. DCR 176Ω Sec. DCR0.778Ω (3.5k-16Ω)  
 Pri. Max. DC Current 110mA  
 Dimension 68x79x83(H) Silver Band Style

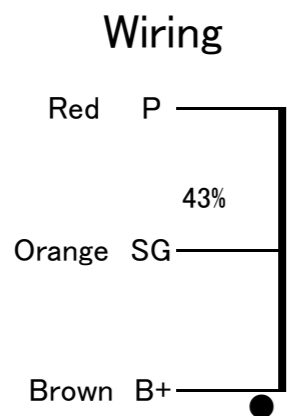