



PMF-30WS-1.6k General Transformer
 Oriented Grain Core Single Ended Tube Amplifier Transformer

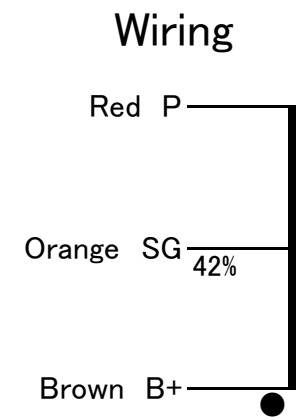

	1.6k	Pri.Zp (Ω)
Blue	16	Sec.Zs (Ω)
Gray	8	
White	4	
Black	COM	ZNF (Ω)
White/Red Spiral	24	
Green	0	

Output 30W(40Hz)
 Freq. Response 10~80kHz(8Ω -3dB)
 Pri. Inductance 7H(160mA 40Hz)
 Pri. DCR 43Ω(P-B) Sec. DCR0.45Ω(8Ω) NF DCR 6.6Ω
 Pri. Max. DC Current 300mA
 Dimension 86x93x103(H) Black Band Style

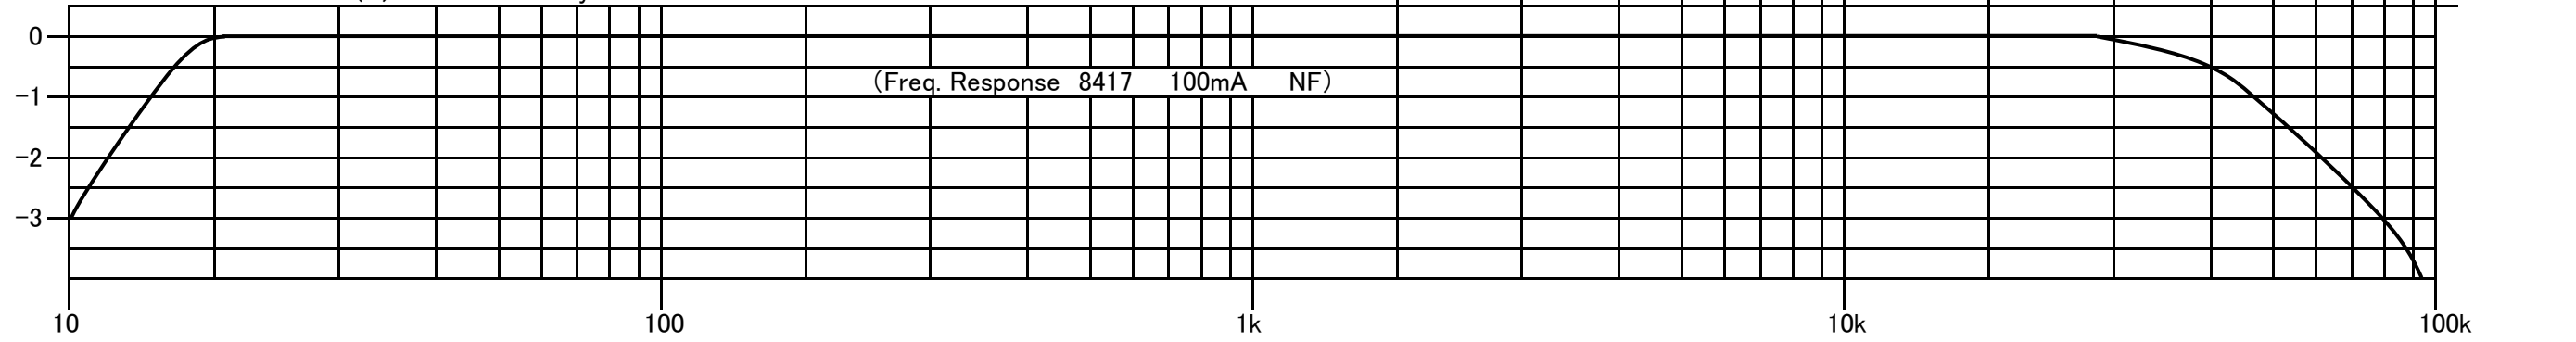

General Transformer / made in Japan