

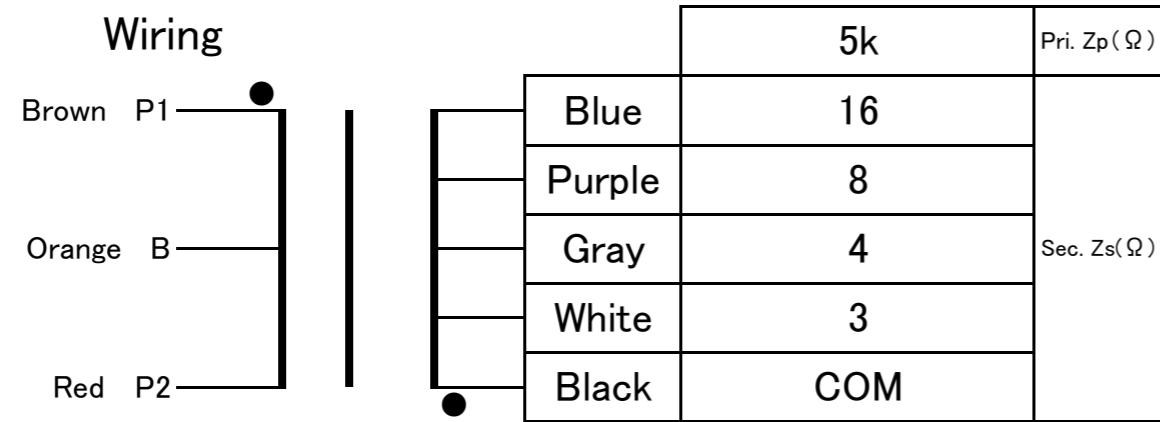


PMF-22P-5k General Transformer
 Oriented Grain Core Push-Pull Tube Amplifier Transformer

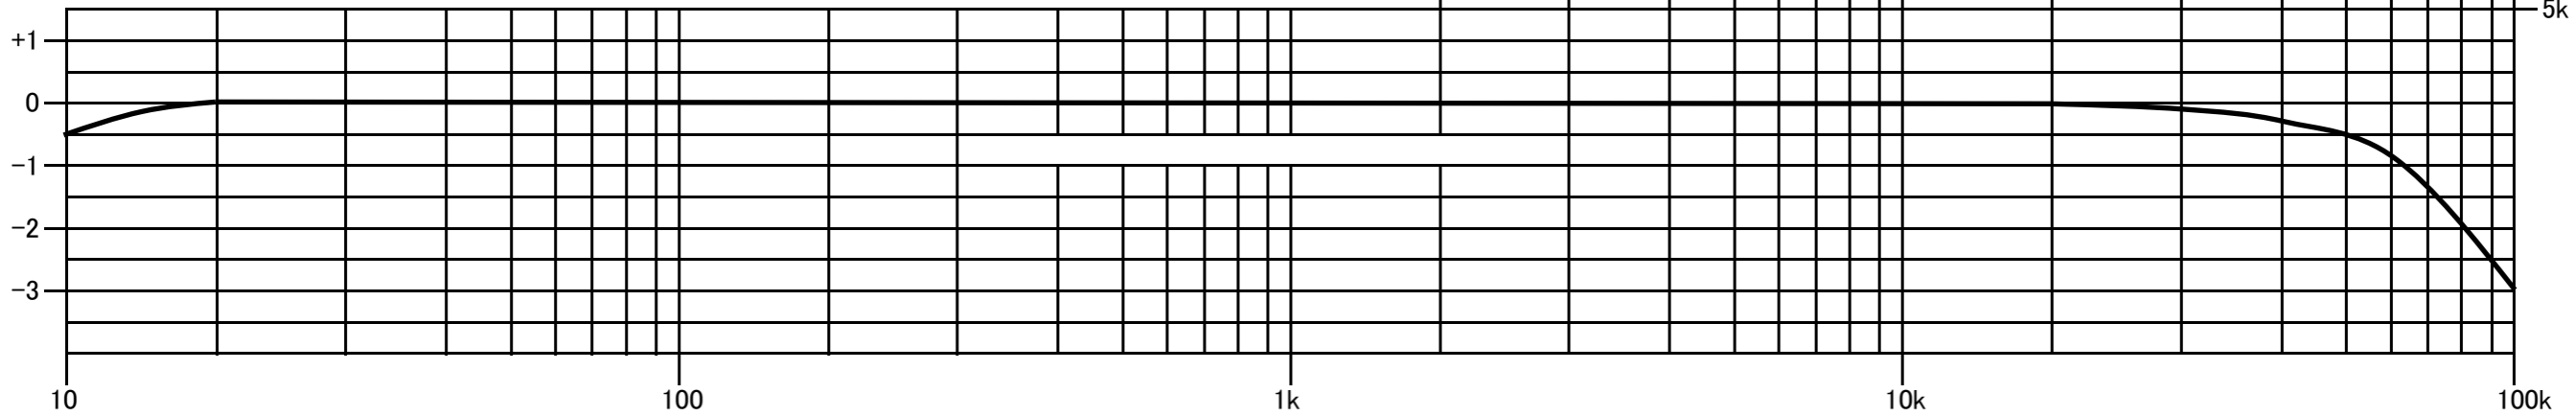

Output 22W(50Hz)
 Freq. Response 5~100kHz(1W 5k-8Ω -3dB)
 Pri. Inductance 200H(50Hz)
 Pri. DCR P1-B(87Ω)/B-P2(88Ω) Sec.DCR COM-8Ω(0.4Ω)
 Pri. Max. DC Current 200mA(2 tubes) Unbalance 10mA(max)
 Dimension 92x77x69(H)

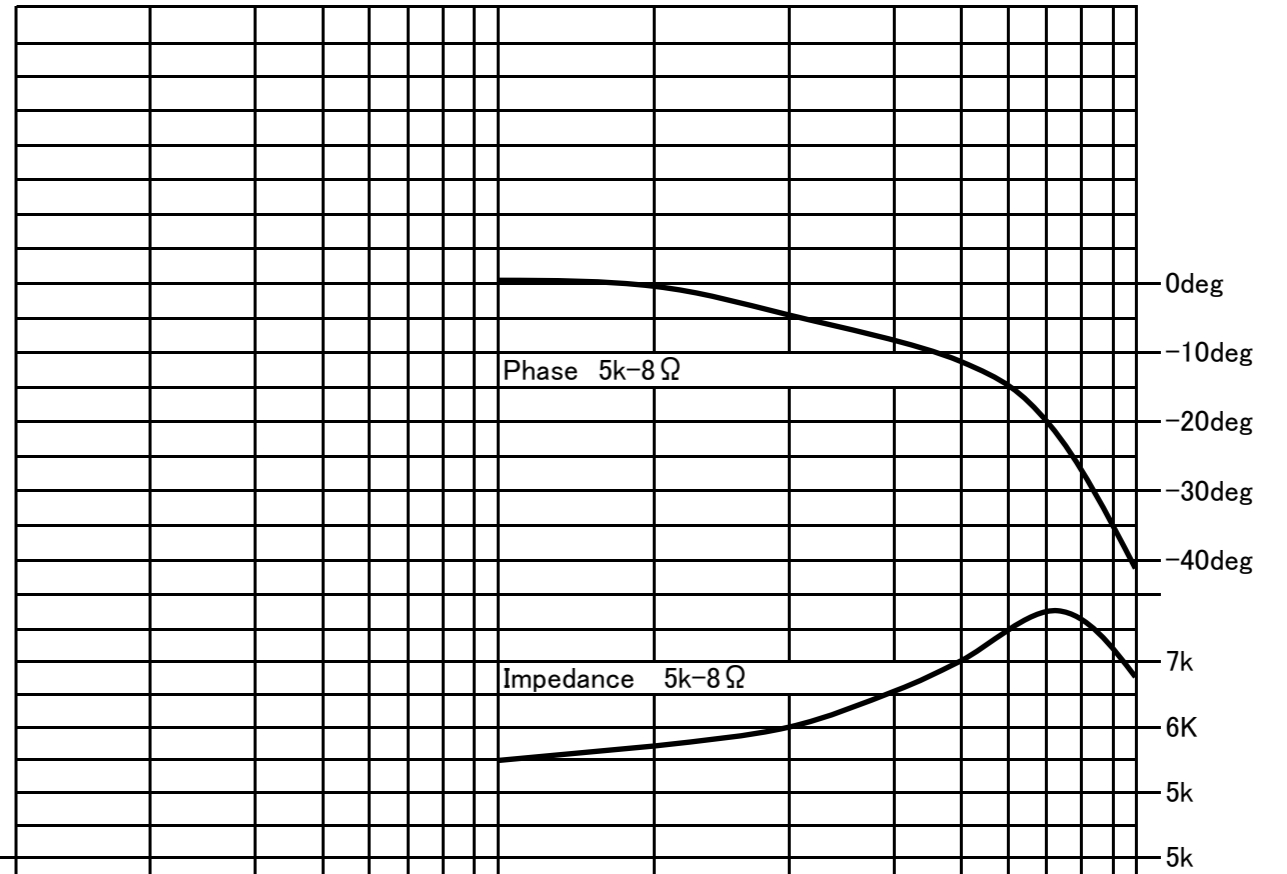

General Transformer / made in Japan