

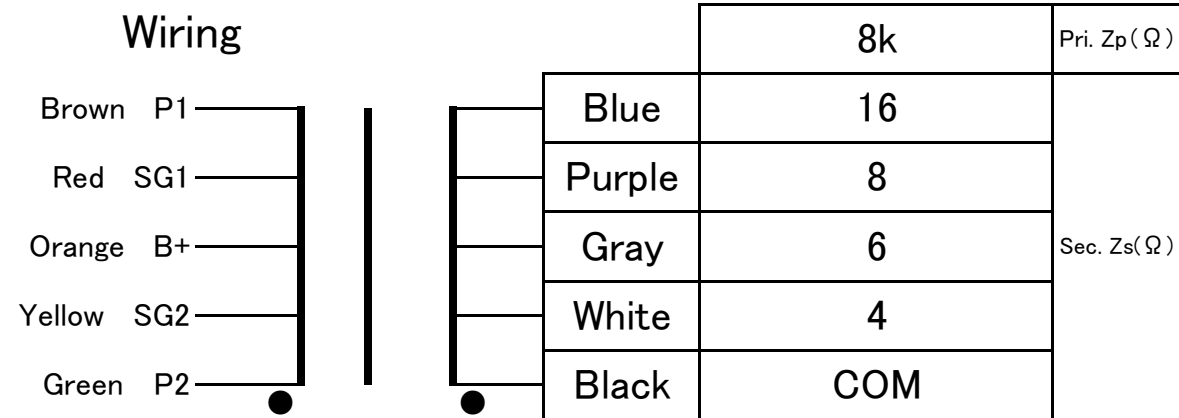


**PMF-28P-8k** General Transformer  
 Oriented Grain Core Push-Pull Tube Amplifier Transformer

**Wiring**

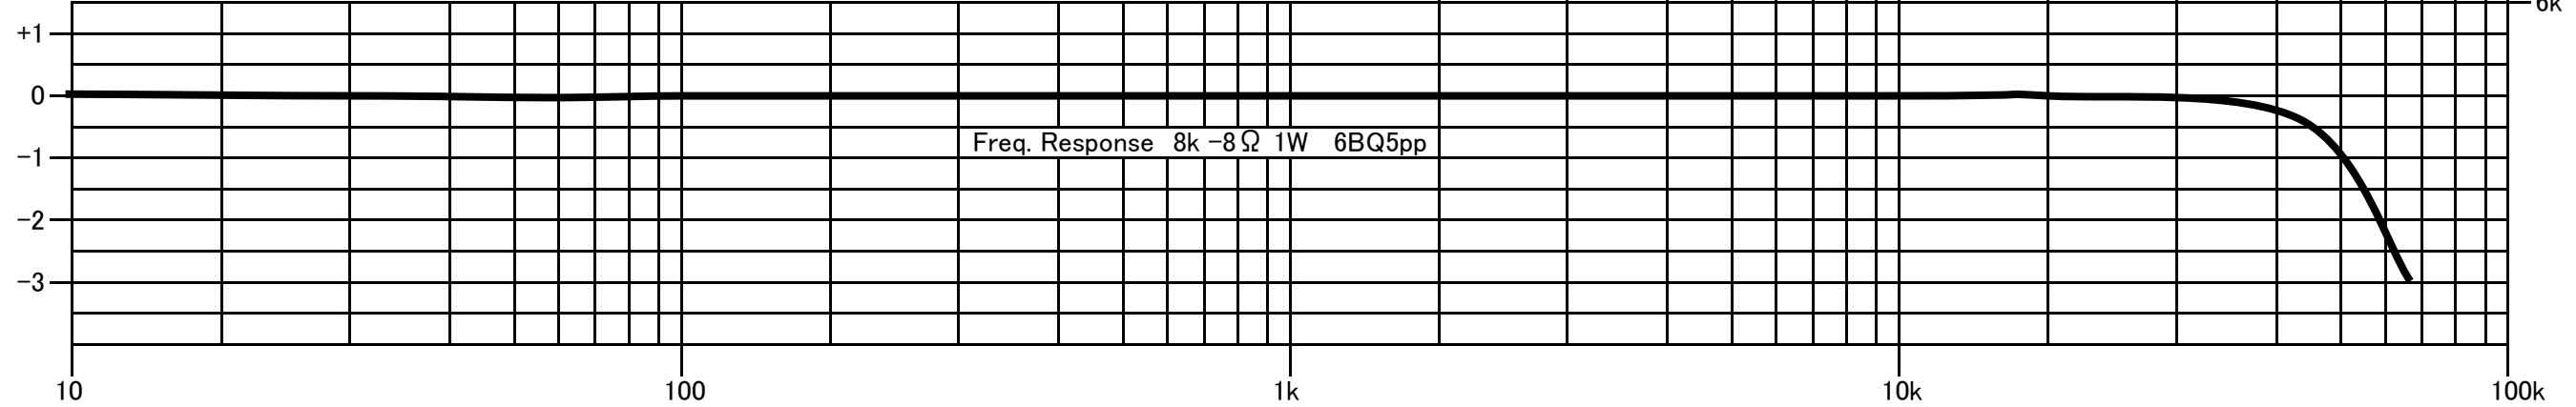

Output 28W(40Hz)  
 Freq. Response 5~65kHz(1W 8k-8Ω -3dB)  
 Pri. Inductance 500H(10Hz)  
 Pri. DCR P1-B(124Ω)/B-P2(124Ω) Sec.DCR COM-8Ω(0.4Ω)  
 Pri. Max. DC Current 180mA(2 tubes) Unbalance 10mA(max)  
 Dimension 58x79x83(H) Silver Band Style

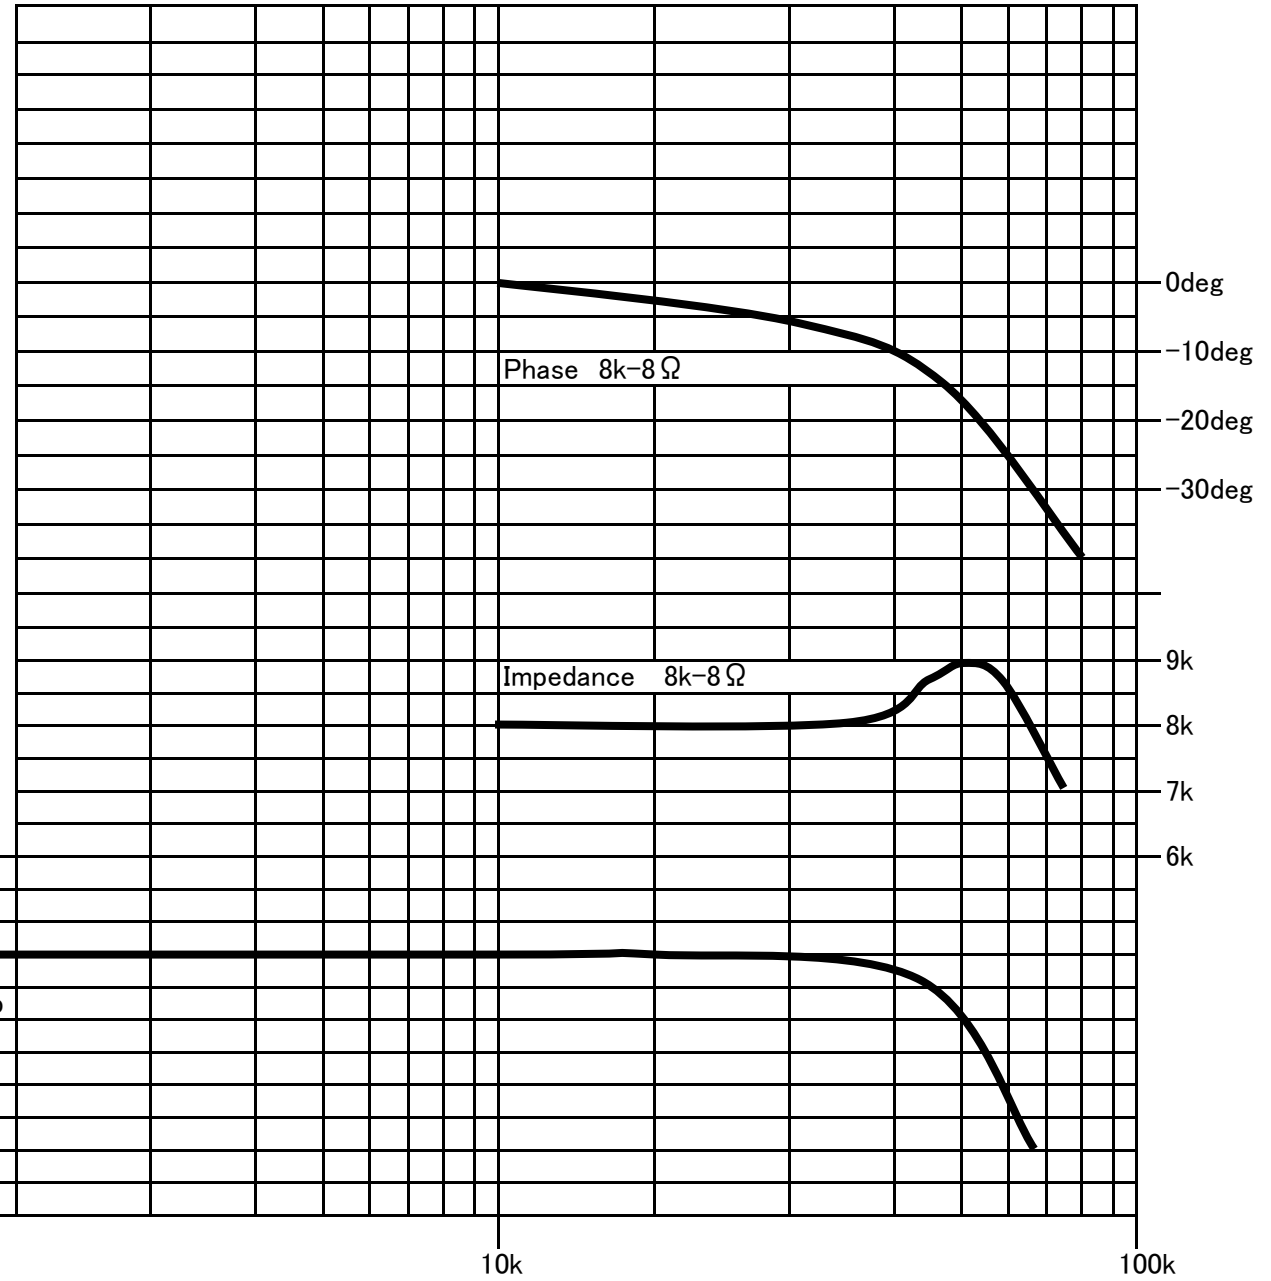

General Transformer / made in Japan