


PMF-40P-8K-NF

General Transformer


Oriented Grain Core Push-Pull Tube Amplifier Transformer

Wiring



	8k	Pri.Zp(Ω)
Blue	16	Sec.Zs(Ω)
Gray	8	
White	4	
Black	COM	
White/Red	16	KNF(Ω)
White/Black	CT	
White/Yellow	0	

Output 40W(45Hz)
Freq. Response 20~60kHz(1W —8Ω —1dB)
Pri. Inductance 300H(10Hz)
Pri. DCR P1-B(77Ω) B-P2(77Ω) Sec. DCR 0.23Ω(COM-8Ω)
Pri. Max. DC Current 240mA(2 tubes) Unbalance 4mA(Max)
Dimension 78x82x94(H) Black Finish 58x60

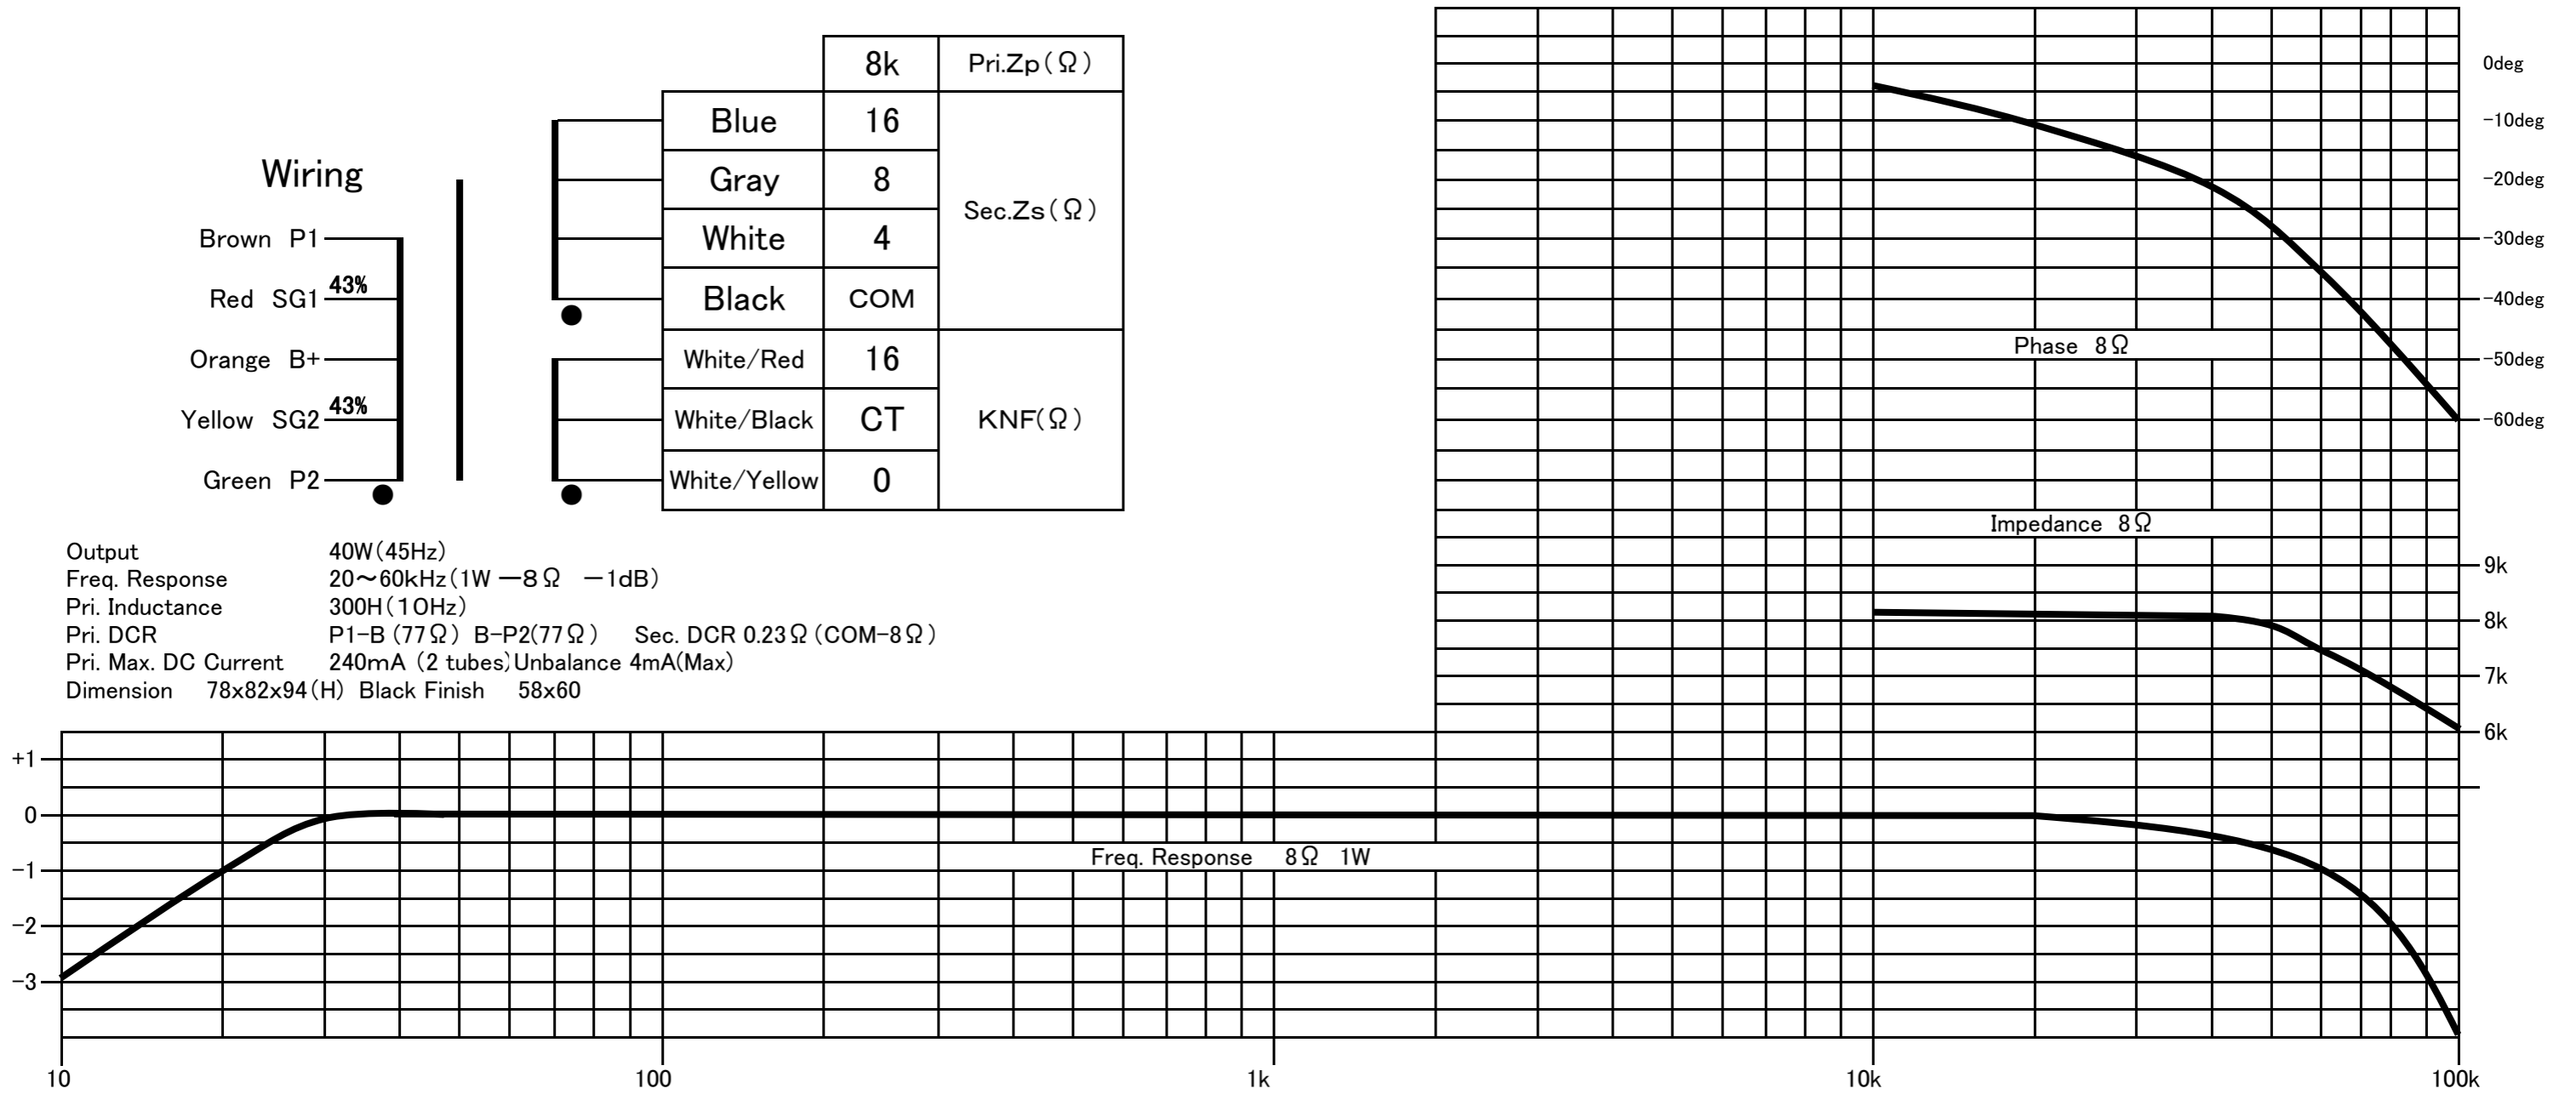

General Transformer / made in Japan