


PMF-80P-3.5K-NF

General Transformer

Oriented Grain Core Push-Pull Tube Amplifier Transformer

Wiring

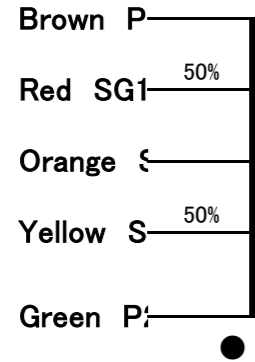

	3.5k	Pri.Zp(Ω)
Blue	16	Sec.Zs(Ω)
Gray	8	
White	4	
Black	COM	
White/Red	16	KNF(Ω)
White/Black	CT	
White/Yellow	0	

Output 80W(30Hz)
 Freq. Response 3~80kHz(1W 3.5k-8Ω -3dB)
 Pri. Inductance MAX500H(10Hz)
 Pri. DCR) P1-B (106Ω) B-P2 (102Ω) Sec. DCR 0.53Ω (COM-8Ω)
 Pri. Max. DC Current 330mA (2 tubes) Unbalance 14mA(Max)
 Dimension 86x93x103(H) Black Finish

